GLOBE

E系列：20161001

GLOBE®

環球脚輪

GLOBE CASTER

物流设备亲密的伙伴



中國廣東省佛山市環球脚輪有限公司

Foshan Globe Caster Co.,Ltd,Guangdong,China



公 司 简 介

环球脚轮有限公司自1988年创立以来，已经成为全球脚轮和单轮的主要制造商之一，无论产量上，还是质量上在同行业中都名列前茅。公司占地面积155亩，厂房建设面积120000平方米，员工500名。公司已经通过IS09001质量和IS014001环境认证,还引进大批先进的自动化设备、生产线，为客户提供更加快速、稳定的供货。环球公司经过20多年的发展，积累了丰富的专业知识、拥有先进的管理理念，以及独特的销售营运模式,并通过不断的开发、研究、探索、创新、持续改进，为全球客户提供21000多种高品质的适用于工业、商业和产品配套行业的脚轮。

环球公司非常注重产品的品质，把产品质量放在第一位，同时我们拥有一支积极忠诚、工作认真、注重细节、有责任心、有使命感、互相合作的优秀团队，他们不断努力，保证生产出来的每一只产品都是最好的。我们的品质控制从每一批原材料开始，只有检验合格的材料方能进入生产线。所有脚轮成品都经过检验、抽样测试。来确保每只脚轮都转动灵活、经久耐用、使用寿命长和免维护。

环球公司热诚为全世界的客户提供优质快速的服务，海外我们拥有众多的独家代理商，且备有充足的库存；在国内我们拥有100多家环球脚轮形象店和众多经销商，他们都有充足的库存,通过密集的销售网络，使我们有能力快速地为我们的客户供货，产品尽快到达指定地点。同时环球脚轮专业的团队，专业的水平为您提供周到的售前、售后服务和提供最佳的解决方案。

满足客户的需要是环球首要的宗旨！



Company Profile

Established in 1988,Globe Caster Co.,Ltd is one of the leading manufacturers in the field of casters and wheels ,with an efficient production capacity and luxurious textures. The floor space covers an area of 155 acres, with a plant area of 120 , 000 square meters and 500 employees. In addition to quality certification ISO9001 and environment certification ISO14001 , a large number of advanced automated equipment are also introduced for production lines, stands out for the great production flexibility and constant investments,allows us to offer increasingly creative and competitive solutions for customers.Being in this line for over two decades with continuous innovation and high quality, the casters and wheels of Globe Caster are being sold well all over lots of countries and regions around the world with general good judgement from the customers.

Persisting in consistent principle of "quality first, and from good to excellent,develop the united and mutual spirit with hard working",we ensure every detail of production for product quality.Incoming materials are strictly quality checked for production lines. To ensure a flexible rotation,durable,long service life and maintenance free of each caster wheel,all of casters have been through inspection and sampling testing.

Always focused on the development of offering competitive solutions after-service, we have adequate inventory for every pending order,with an intensive sales-network of over 100 distributors and exclusive agents home and abroad.

Satisfaction of customers is the first task of Globe !



办公楼
Office building



五金车间
Hardware shop



五金车间
Hardware shop



自动焊接
Automatic welding



注塑车间
The injection molding workshop



PU车间
PU workshop




模具车间
Mould workshop



装架车间
Rack workshop



装轮车间
Install wheel workshop

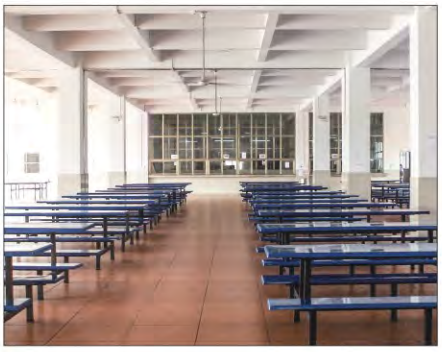

饭堂
The dining room




足球场
Football field



篮球场
The basketball court



脚轮测试机
Castor testing machine

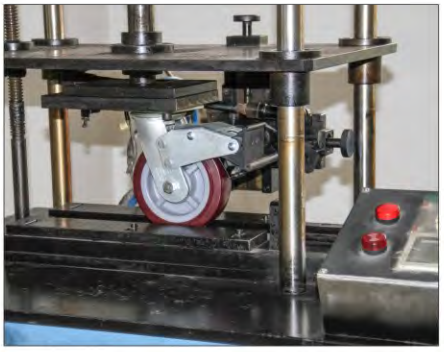

刹制测试机
Brake system testing machine



螺丝测试机
Rose test machine



垂直测试机
The vertical testing machine



冷冻冲击测试机
Frozen impact test machine



金属涂层测厚仪
The metal coating thickness gauge



盐雾测试机
Salt spray test machine



高温测试箱
High temperature test box



硬度测试台
Hardness test bed

ISO9001:2008质量体系认证

ISO9001:2008 QUALITY SYSTEM CERTIFICATE

ISO14001:2004环境体系认证

ISO14001:2004 ENVIRONMENT SYSTEM CERTIFICATE


sira CERTIFICATION
质量管理体系认证证书
佛山市南海区环球脚轮有限公司
注册地址：中国广东省佛山市南海区狮山科技工业园A区兴业东路2号
经营地址：中国广东省佛山市南海区狮山科技工业园A区兴业东路2号
GB/T19001-2008 idt ISO9001:2008 标准
五金脚轮、塑胶制品（脚轮轮子）的设计开发、生产、销售
Sira Certification Service


sira CERTIFICATION
QUALITY MANAGEMENT SYSTEM CERTIFICATE
FOSHAN NANHAI GLOBE CASTER CO., LTD.
GB/T19001-2008 idt ISO9001:2008
Design and development, manufacture and sales of hardware casters, plastic products (caster wheels)
Sira Certification Service


sira CERTIFICATION
环境管理体系认证证书
佛山市南海区环球脚轮有限公司
注册地址：中国广东省佛山市南海区狮山科技工业园A区兴业东路2号
经营地址：中国广东省佛山市南海区狮山科技工业园A区兴业东路2号
GB/T24001-2004 idt ISO14001:2004 标准
五金脚轮、塑胶制品（脚轮轮子）的设计开发、生产、销售
Sira Certification Service


sira CERTIFICATION
ENVIRONMENTAL MANAGEMENT SYSTEM CERTIFICATE
FOSHAN NANHAI GLOBE CASTER CO., LTD.
GB/T24001-2004 idt ISO14001:2004
Design and development, manufacture and sales of hardware casters, plastic products (caster wheels)
Sira Certification Service

已申请获批国家专利100多项

Has more than 100 national patent application is approved



外观设计专利证书


外观设计专利证书



外观设计专利证书


外观设计专利证书

脚轮分解图
Caster terms

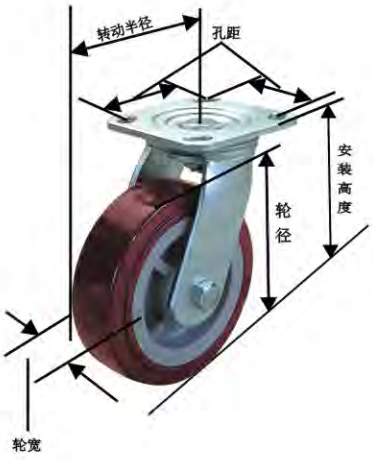

滚柱单轮分解图
Roller bearing wheel terms

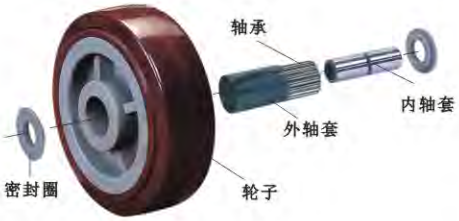

滚珠单轮分解图
Ball bearing wheel terms



脚轮性能特性：Properties of caster

性能特点 Properties	单轮材料 Monocastor Materials						
	尼龙 Nylon	超级聚氨脂 Super polyurethane	高强度聚氨脂 High-strength polyurethane	高强度人造胶 High-strength artificial rubber	钢铁 Steel	耐高温轮 High-heat resistant Caster	橡胶 Rubber
承载（公斤） Load(kg)	10～2000	10～1500	10～1500	10～310	10～2000	40～600	40～400
适用温度(℃) Applicable temperature(℃)	-45～130	-45～90	-45～90	-45～60	-45～500	-35～230	-45～90
轮硬度 Hardness	—	95（±5）A	95（±5）A	70（±5）A	—	—	70（±5）A
转动灵活性 Rotary flexibility	优 Excellent	优 Excellent	优 Excellent	优 Excellent	优 Excellent	优 Excellent	优 Excellent
转动宁静 Rotary quietness	一般 Moderate	优 Excellent	优 Excellent	优 Excellent	差 Poor	良 Good	优 Excellent
地板保护 Floor protection	一般 Moderate	优 Excellent	优 Excellent	优 Excellent	差 Poor	良 Good	一般 Moderate
无轮印 Free of tract	无 No	无 No	无 No	无 No	无 No	无 No	无 No
耐冲击 Impact resistant	优 Excellent	优 Excellent	优 Excellent	优 Excellent	良 Good	优 Excellent	优 Excellent
耐磨损 Wear resistant	优 Excellent	优 Excellent	优 Excellent	优 Excellent	优 Excellent	优 Excellent	优 Excellent
防水性能 Waterproof	优 Excellent	优 Excellent	优 Excellent	优 Excellent	差 Poor	优 Excellent	优 Excellent
防化学品性能 Chemical resistant	优 Excellent	优 Excellent	优 Excellent	优 Excellent	良 Good	优 Excellent	差 Poor

怎样选择合适你使用的脚轮
（以下介绍几种主要考虑因素）

一. 如何选择合适的脚轮

1、选择车轮材质：首先考虑使用路面的大小，障碍物、使用场地上残留物质（如铁屑、油脂），所处环境状况（如高温、常温或低温）及车轮所能承载的重量等不同条件来决定选择适合的车轮材质。例如：橡胶轮不能耐酸、油脂和化学品，超级聚氨脂轮、高强度聚氨脂轮、尼龙轮、铸铁轮和耐高温轮则能适用于不同的特殊环境。

2、计算承载重量：为了能够计算出各种脚轮需要的载重能力，必须知道运输设备自重、最大荷重和所用单轮和脚轮的数量。一个单轮或脚轮所需的载重能力计算如下：$T = \frac{E+Z}{M} \times N$；T = 单轮或脚轮所需承载重量；E = 运输设备的自重；Z = 最大荷重；M =所用单轮和脚轮的数量；N =安全系数(约1.3-1.5)。

3、决定轮径大小：通常车轮直径越大越容易推动，荷重能力也愈大同时也较能保护地面不受损坏，轮径大小的选择首先应考虑承载的重量和荷重下搬运车的起动推力来决定。

4、车轮材质软硬的选择：通常车轮有尼龙轮、超级聚氨脂轮、高强度聚氨脂轮、高强度人造胶轮、铁轮、打气轮。超级聚氨脂轮、高强度聚氨脂轮不论在室内室外的地面行驶，都能满足你的搬运要求；高强度人造胶轮则能适用于酒店、医疗器械、楼层、木地板、瓷砖地面等要求行走时噪音小宁静的地面上行驶；尼龙轮、铁轮适用于地面不平或地面上有铁屑等物质的场地；而打气轮则适用于轻荷重及路面软不平坦的场合。

5、转动灵活性：单轮越大转动就越省力，滚柱轴承能载较重的负载，转动时阻力较大；单轮安装上优质的（轴承钢）滚珠轴承，能承载较重的负荷，转动更轻便，灵活宁静。

6、温度状况：严寒和高温的场合对脚轮的影响很大，聚氨脂轮在零下 45℃ 下的低温，转动灵活自如，耐高温轮在高温230℃下转动轻便。

二. 如何选择适当的轮架

1、通常选择适合的轮架首先考虑脚轮承载的重量如超市、学校、医院、办公楼、酒店等地方，由于地板良好，平滑且搬运的货物较轻，（每只脚轮承载在10-140kg），适合选择以薄钢板（2-4mm）冲压成形的电镀轮架，其轮架轻，操作灵活，静音又美观，此电镀轮架依滚珠排列分为双排珠和单排珠。若常移动或搬运时应用双排珠。

2、在工厂和仓库等场所，货物搬运很频繁且负荷较重（每只脚轮承载在280-420kg）则适合选用以厚钢板(5-6mm)冲压热锻并焊接的双排滚珠的轮架。

3、若用于搬运重物如纺织工厂、汽车工厂、机械工厂等地方，由于荷重大且工厂内行走距离长（每只脚轮承载在350-2000kg ），故应选择以厚钢板(8-12mm)切割后焊接的轮架，活动轮架使用平面滚珠轴承和滚珠轴承在底板上，使脚轮能承受重负荷，转动灵活、抗撞击等功能。

How to choose proper castor
（important facts to be considered）

一. How to choose proper castor

1、Decide to composition of castor: Consideration on the size of road,obstacles, remaining substances on application area(such as iron scraps,grease), surrounding conditions(such as high temperature, normal temperature or low temperature) as well as the load capacity of castor should be taken into during the decision-making for profer composition of castor. For example, rubber castor is non-resistant to acid,grease and chemical,while super polyurethane castor, high strength polyurethane castor, nylon castor, steel castor and high-heat castor are applicable to different special areas.

2、Calculate load capacity: To calculate the load capacity of various castors, the net weight of transported equipment, maximum load and number of monocastor or castor used must be provided. Load capacity required by a monocastor or castor is calculated as follows:T=(E+Z)/MXN; T=load capacity required by a monocastor or castor;E=net weight of transported equipment;Z=Maximum load; M=number of monocastor or castor used; N=safety coefficient (about 1.3-1.5).

3、Decide castor diameter: The larger the diameter of castor,the easier the movement and the larger the load ability,which can also protect the floor from any damage.The selection of castor diameter should be decided by the load capacity and the starting thrust of conveyor with load.

4、Decide hardness of castor:Options include nylon castor,super polyurethane castor,high-strength polyurethane castor , high-strength artificial rubber castor,iron castor and inflated castor. Super polyurethane castor and high-strength polyurethane castor can meet your transportation requirements for indoor and outdoor movement . High-strength artificial rubber castor is applicable to hotel,medical equipment ,floor,wood flooring and ground paved with ceramic tiles on which movement is required to be quiet with low noise. Nylon castor and iron castor are applicable to uneven ground or ground with iron scraps.Inflated castor is applicable to light load requirement and ground with soft and uneven surface.

5、Rotary flexibility: The larger the monocastor the more energy saved during rotation. Roller bearing has a higher load and larger resistance during rotation. Monocastor with high quality (bearing steel)ball bearing has a higher load, lighter,more flexible and quieter rotation.

6、Temperature condition: The operation of castor is greatly affected under low temperature and high temperature,except polyurethane castor,which has flexible and free rotation under low temperature of-45℃ and high-heat resistant castor,which has easy rotation under high temperature of 230℃

二. How to choose proper castor holder

1、Load of castor should be firstly considered in selection.For example,for supermaket,school,hospital, office and hotel where the floor condition is good and smooth and the cargo carried is light relatively(load on each castor is 10-140kg),electroplated castor holder made of thin steel sheet (2-4mm)after stamping would be a proper choice.This kind of holder is light-weighted,flexible -operated,mute and beautiful and is classified into duplex ball and simplex ball according to the arrangement of balls. Duplex ball type is recommended for frequent movement or transportation.

2、As for factory and warehouse ,where cargo handling is very frequent and the load is heavy(load on each castor is 280-420kg),duplex ball castor holder made of thick steel plate(5-6mm)after stamping , hot die and welding would be a proper choice.

3、As for textile mill, motor works and machinery plant where heavy cargo is handled,castor holder made of thick steel plate(8-12mm)after cutting and welding should be chosen due to the heavy load and long distance of movement inside the plant (load on each castor is 350-2000kg),The movable castor holder mounted on the bottom plate with flas ball bearing and ball bearing ensures high load capacity,flexible rotation and impact resistance of castor.

三、选择合适的轴承 Choose the right bearing



1. 滚珠轴承：选用优质轴承钢制作而成的滚珠轴承能承载较重的负荷，适用于要求转动灵活和宁静的场合。

1. Ball bearing: Ball bearing made of high quality bearing steel can bear a high load and is applicable to place demanding flexible and quiet rotation.



2. 圆锥滚子轴承：选用优质轴承钢制作而成的滚子轴承能承载较重的负荷，而且转动灵活和阻力小。

2. Tapered roller bearing: Tapered roller bearing made of high quality bearing steel can bear a high load and with a flexible rotation and small resistance.



3. 平面轴承：适用于高和特高负荷及高转速的场合。

3. Flat bearing:Flat bearing is applicable to place of high and super high load and high rotary speed.



4. 抗冲击轴承：适用于承载负荷大，要求转动灵活和宁静的场合，其寿命长和经久耐用。

4. Impact-resistant bearing: Impact-resistant bearing can carry large loads,is applicable to place demanding flexible and quiet rotation and with long life and durability.



5. 特尔灵轴承：特尔灵是特殊工程塑料，适用于潮湿和腐蚀性的地方，转动灵活性一般，阻力较大。

5. Derlin bearing:Derlin bearing made of special engineering plastics is applicable to humid and corrosive place,with moderate rotary flexibilitty and hing resistance force.



6. 滚柱轴承：经过热处理的滚柱轴承能承载较重的负荷，转动灵活性一般。

6. Roller bearing:Roller bearing with heat treatment can bear a high load,with moderate rotary flexibility.



7. 尼龙滚柱轴承：轴承牢固，径向轴承公差小，转动灵活性一般。

7. Nylon roller bearing: Bearing firmly, with small tolerances of radial bearing and general rotation flexibility.



8. 滚轴：轴承牢固简单，但其摩擦系数不利，因此导致起动阻力和滚动阻力相对较大。

8. Roller：Bearing firmly simple, but its negative coefficient of friction, thus leading to the starting resistance and rolling resistance is relatively large.

E系列脚轮型号说明 E-Series Caster Model Description



EH01-11-150S-304

- 单轮材料 Wheel Material
- 支架分类 Bracket Classification
- 轮径 Wheel Diameter
- 支架表面处理 Bracket Surface Treatment
- 轴承 Bearing
- 系列编号 Series Number

E系列单轮型号说明 E-Series Wheel Model Description



EH01-1-150K-304

- 单轮材料 Wheel Material
- 单轮 Wheel
- 轮径 Wheel Diameter
- 轴承 Bearing
- 系列编号 Series Number

E系列支撑架型号说明 E-Series Floor Lock Brakes Model Description



EH01-1-150W

- 支撑架 Floor Lock Brakes
- 轮径 Wheel Diameter
- 支架表面处理 Bracket Surface Treatment
- 系列编号 Series Number

E系列脚轮型号说明

EH01-11-150S-304

系列编号	
EA01	EA1系列
EB02	EB2系列
EC03	EC3系列
ED01	ED1系列
EF12	EF12系列
EG01	EG1系列
EH08	EH8系列
EK01	EK1系列
EM02	EM2系列
EP05	EP5系列
ER02	ER2系列
ES01	ES1系列
ET03	ET3系列

轴　承	
1	滚　珠
2	滚　柱
3	尼龙滚柱
4	光　身
5	轴　套
6	特尔灵

支架表面处理	
1	镀蓝锌
2	镀彩锌
3	镀黄锌
4	镀　铬
5	镀　金
6	不锈钢
7	焗　漆
8	发　黑
9	工程塑料

轮　径	
025	1″
032	$1^{1}/_{4}$″
038	$1^{1}/_{2}$″
040	
050	2″
065	$2^{1}/_{2}$″
075	3″
090	$3^{1}/_{2}$″
100	4″
125	5″
150	6″
200	8″
250	10″
300	12″
400	16″

支　架　分　类			
S	活　　动	H	插　　杆
SA	活动尼龙双刹	HA	插杆尼龙双刹
SB	活动金属双刹	HB	插杆金属双刹
SC	活动金属边刹	HC	插杆金属边刹
SD	活动尼龙单刹	HD	插杆尼龙单刹
ST	方向锁定活动	G	膨胀胶丝杆
R	固　　定	GA	膨胀胶丝杆尼龙双刹
RB	固定金属双刹	GB	膨胀胶丝杆金属双刹
RC	固定金属边刹	GC	膨胀胶丝杆金属边刹
M	丝　　杆	GD	膨胀胶丝杆尼龙单刹
MA	丝杆尼龙双刹	VS	抗冲击活动
MB	丝杆金属双刹	VT	方向锁定抗冲击活动
MC	丝杆金属边刹	FS	夹板式活动
MD	丝杆尼龙单刹	FR	夹板式固定
PS	空心钉活动	LS	防震活动
PR	空心钉固定	LR	防震固定
PA	空心钉尼龙双刹	LE	防震活动金属单刹
PB	空心钉金属双刹	LF	防震固定金属单刹
PC	空心钉金属边刹	W	支 撑 架
PD	空心钉尼龙单刹	K	单　　轮

单轮型号	单轮材料	单轮型号	单轮材料
101	高级尼龙(黑色)(园边)	413	钢芯聚氨脂(绿色)(平边)
102	高级尼龙(黑色)(平边)	414	钢芯聚氨脂(蓝色)(园边)
103	高强度尼龙(白色)(园边)	415	钢芯聚氨脂(蓝色)(平边)
104	高强度尼龙(白色)(平边)	501	高强度人造胶(灰色)(园边)
105	超级尼龙(红色)(园边)	502	高强度人造胶(灰色)(平边)
106	超级尼龙(红色)(平边)	503	高级人造胶(黑色)(园边)
107	超韧尼龙(白色)	504	高级人造胶(黑色)(平边)
108	耐高温(黑色)	505	静音人造胶(啡色)(园边)
201	PP(黑色)(园边)	506	静音人造胶(啡色)(平边)
202	PP(黑色)(平边)	507	导电人造胶(灰色)(园边)
203	PP(白色)(园边)	508	导电人造胶(灰色)(平边)
204	PP(白色)(平边)	601	橡胶(黑色)(园边)
205	聚烯烃(灰色)(园边)	602	橡胶(黑色)(平边)
206	聚烯烃(灰色)(平边)	603	橡胶(灰色)(园边)
207	耐力(蓝色)	604	橡胶(灰色)(平边)
208	美力(红色)	605	尼龙芯高级橡胶(黑色)(园边)
209	酚醛(黑色)	606	尼龙芯高级橡胶(黑色)(平边)
210	尼龙(黄色)	607	尼龙芯超静橡胶(灰色)(园边)
211	耐力(白色)	608	尼龙芯超静橡胶(灰色)(平边)
301	高级聚氨脂(黑色)(园边)	609	尼龙芯超级橡胶(红色)(园边)
302	高级聚氨脂(黑色)(平边)	610	尼龙芯超级橡胶(红色)(平边)
303	超级聚氨脂(红色)(园边)	611	尼龙芯弹力橡胶(蓝色)(园边)
304	超级聚氨脂(红色)(平边)	612	尼龙芯弹力橡胶(蓝色)(平边)
305	超静聚氨脂(灰色)(园边)	613	铝芯橡胶(黑色)(园边)
306	超静聚氨脂(灰色)(平边)	614	铝芯橡胶(黑色)(平边)
307	高强度聚氨脂(蓝色)(园边)	615	铝芯橡胶(灰色)(园边)
308	高强度聚氨脂(蓝色)(平边)	616	铝芯橡胶(灰色)(平边)
309	美静聚氨脂(绿色)(园边)	617	钢芯打气(黑色)
310	美静聚氨脂(绿色)(平边)	618	发泡(灰色)
311	超韧聚氨脂(黄色)(园边)	619	钢芯橡胶(黑色)
312	超韧聚氨脂(黄色)(平边)	620	钢芯橡胶(灰色)
313	烽火聚氨脂(灰色)	621	导电橡胶(黑色)
315	两刀电梯轮(灰色)	622	塑芯橡胶(黑色)
316	两刀电梯轮(红色)	623	塑芯橡胶(灰色)
317	三刀电梯轮(灰色)	624	铁芯橡胶(黑色)
318	单槽电梯轮(红色)	701	铸铁
319	单槽电梯轮(蓝色)	702	V型槽铸铁
320	静音聚氨脂(啡色)(园边)	703	铸钢
321	静音聚氨脂(啡色)(平边)	801	尼龙芯高级聚氨脂(黑色)(园边)
401	铁芯聚氨脂(红色)(园边)	802	尼龙芯高级聚氨脂(黑色)(平边)
402	铁芯聚氨脂(红色)(平边)	803	尼龙芯超级聚氨脂(红色)(园边)
403	铁芯聚氨脂(黄色)(园边)	804	尼龙芯超级聚氨脂(红色)(平边)
404	铁芯聚氨脂(黄色)(平边)	805	尼龙芯超静聚氨脂(灰色)(园边)
405	铝芯聚氨脂(红色)(园边)	806	尼龙芯超静聚氨脂(灰色)(平边)
406	铝芯聚氨脂(红色)(平边)	807	尼龙芯高强度聚氨脂(蓝色)(园边)
407	铝芯聚氨脂(黄色)(园边)	808	尼龙芯高强度聚氨脂(蓝色)(平边)
408	铝芯聚氨脂(黄色)(平边)	809	尼龙芯美静聚氨脂(绿色)(园边)
409	铸钢芯聚氨脂(黄色)	810	尼龙芯美静聚氨脂(绿色)(平边)
410	铁芯聚氨脂(白色)(园边)	811	尼龙芯超韧聚氨脂(黄色)(园边)
411	铁芯聚氨脂(白色)(平边)	812	尼龙芯超韧聚氨脂(黄色)(平边)
412	钢芯聚氨脂(绿色)(园边)		

E-Series Caster Model Description

EH01-11-150S-304

Series No.	
EA01	EA1 Series
EB02	EB2 Series
EC03	EC3 Series
ED01	ED1 Series
EF12	EF12 Series
EG01	EG1 Series
EH08	EH8 Series
EK01	EK1 Series
EM02	EM2 Series
EP05	EP5 Series
ER02	ER2 Series
ES01	ES1 Series
ET03	ET3 Series

Bearing Type	
1	Ball Bearing
2	Roller Bearing
3	Nylon Roller
4	Nude Wheel
5	Plain Bearing
6	Derlin Bearing

Wheel Diameter	
025	1″
032	$1^1/_4$″
038	$1^1/_2$″
040	
050	2″
065	$2^1/_2$″
075	3″
090	$3^1/_2$″
100	4″
125	5″
150	6″
200	8″
250	10″
300	12″
400	16″

Bracket Surface Treatment	
1	Blue Zinc Plating
2	Colored Zinc Plating
3	Yellow Zinc Plating
4	Chrome Plating
5	Gold Plating
6	Stainless Steel
7	Baking Finish
8	Black Oxide Coating
9	Engineering Plastic

Bracket Classification			
S	Swivel	H	Stem
SA	Swivel W/Nylon Dual Brake	HA	Stem W/Nylon Dual Brake
SB	Swivel W/Metal Dual Brake	HB	Stem W/Metal Dual Brake
SC	Swivel W/Metal Side Brake	HC	Stem W/Metal Side Brake
SD	Swivel W/Nylon Single Brake	HD	Stem W/Nylon Single Brake
ST	Swivel W/Directional Lock	G	Expanding Adapter Threaded Stem
R	Rigid	GA	Expanding Adapter Threaded Stem W/Nylon Dual Brake
RB	Rigid W/Metal Dual Brake	GB	Expanding Adapter Threaded Stem W/Metal Dual Brake
RC	Rigid W/Metal Side Brake	GC	Expanding Adapter Threaded Stem W/Metal Side Brake
M	Threaded Stem	GD	Expanding Adapter Threaded Stem W/Nylon Single Brake
MA	Threaded Stem W/Nylon Dual Brake	VS	Shock Resistant Swivel type
MB	Threaded Stem W/Metal Dual Brake	VT	Directional Lock Shock Resistant Swivel type
MC	Threaded Stem W/Metal Side Brake	FS	Flat Stem Swivel Type
MD	Threaded Stem W/Nylon Single Brake	FR	Flat Stem Rigid Type
PS	Swivel W/Bolt Hole	LS	Shock Absorbing Swivel Type
PR	Rigid W/Bolt Hole	LR	Shock Absorbing Rigid Type
PA	Bolt Hole W/Nylon Dual Brake	LE	Shock Absorbing Swivel Type W/Metal Single Brake
PB	Bolt Hole W/Metal Dual Brake	LF	Shock Absorbing Rigid Type W/Metal Single Brake
PC	Bolt Hole W/Metal Side Brake	W	Floor Lock Brakes
PD	Bolt Hole W/Nylon Single Brake	K	Single Wheel

Wheel Model No.	Wheel Material	Wheel Model No.	Wheel Material
101	High-class Nylon (Black)(Round tread)	413	Steel core Polyurethane (Green)(Flat tread)
102	High-class Nylon (Black)(Flat tread)	414	Steel core Polyurethane (Blue)(Round tread)
103	High-strength Nylon (White)(Round tread)	415	Steel core Polyurethane (Blue)(Flat tread)
104	High-strength Nylon (White)(Flat tread)	501	High-strength artificial rubber (Gray)(Round tread)
105	Super Nylon (Red)(Round tread)	502	High-strength artificial rubber (Gray)(Flat tread)
106	Super Nylon (Red)(Flat tread)	503	High-class artificial rubber (Black)(Round tread)
107	Super Tenacity Nylon (White)	504	High-class artificial rubber (Black)(Flat tread)
108	High-heat resistant (Black)	505	Muting artificial rubber (Brown)(Round tread)
201	PP (Black)(Round tread)	506	Muting artificial rubber (Brown)(Flat tread)
202	PP (Black)(Flat tread)	507	Conductive artificial rubber (Gray)(Round tread)
203	PP (White)(Round tread)	508	Conductive artificial rubber(Gray)(Flat tread)
204	PP (White)(Flat tread)	601	Rubber (Black)(Round tread)
205	Polyolefin (Gray)(Round tread)	602	Rubber (Black)(Flat tread)
206	Polyolefin (Gray)(Flat tread)	603	Rubber (Gray)(Round tread)
207	Endurance (Blue)	604	Rubber (Gray)(Flat tread)
208	Meili (Red)	605	Nylon core High-class Rubber (Black)(Round tread)
209	Phenolic (Black)	606	Nylon core High-class Rubber (Black)(Flat tread)
210	Nylon (Yellow)	607	Nylon core Super Muting Rubber (Gray)(Round tread)
211	Endurance (White)	608	Nylon core Super Muting Rubber (Gray)(Flat tread)
301	High-class Polyurethane (Black)(Round tread)	609	Nylon core Super Rubber (Red)(Round tread)
302	High-class Polyurethane (Black)(Flat tread)	610	Nylon core Super Rubber (Red)(Flat tread)
303	Super Polyurethane (Red)(Round tread)	611	Nylon core Elastic Rubber (Blue)(Round tread)
304	Super Polyurethane (Red)(Flat tread)	612	Nylon core Elastic Rubber (Blue)(Flat tread)
305	Super Muting Polyurethane (Gray)(Round tread)	613	Aluminium core Rubber (Black)(Round tread)
306	Super Muting Polyurethane (Gray)(Flat tread)	614	Aluminium core Rubber (Black)(Flat tread)
307	High-strength Polyurethane (Blue)(Round tread)	615	Aluminium core Rubber (Gray)(Round tread)
308	High-strength Polyurethane (Blue)(Flat tread)	616	Aluminium core Rubber (Gray)(Flat tread)
309	Meijing Polyurethane (Green)(Round tread)	617	Steel core Pneumatic Rubber (Black)
310	Meijing Polyurethane (Green)(Flat tread)	618	Foamed Rubber (Gray)
311	Super Tenacity Polyurethane (Yellow)(Round tread)	619	Steel core Rubber (Black)
312	Super Tenacity Polyurethane (Yellow)(Flat tread)	620	Steel core Rubber (Gray)
313	Fenghuo Polyurethane (Gray)	621	Conductive Rubber (Black)
315	Two Slices Elevator Caster (Gray)	622	Plastic core Rubber (Black)
316	Two Slices Elevator Caster (Red)	623	Plastic core Rubber (Gray)
317	Three Slices Elevator Caster (Gray)	624	Iron core Rubber (Black)
318	One Groove Elevator Caster (Red)	701	Cast iron
319	One Groove Elevator Caster (Blue)	702	V Groove Cast iron
320	Muting Polyurethane (Brown)(Round tread)	703	Cast steel
321	Muting Polyurethane (Brown)(Flat tread)	801	Nylon core High-class Polyurethane (Black)(Round tread)
401	Iron core Polyurethane (Red)(Round tread)	802	Nylon core High-class Polyurethane (Black)(Flat tread)
402	Iron core Polyurethane (Red)(Flat tread)	803	Nylon core Super Polyurethane (Red)(Round tread)
403	Iron core Polyurethane (Yellow)(Round tread)	804	Nylon core Super Polyurethane (Red)(Flat tread)
404	Iron core Polyurethane (Yellow)(Flat tread)	805	Nylon core Super muting Polyurethane (Gray)(Round tread)
405	Aluminium core Polyurethane (Red)(Round tread)	806	Nylon core Super muting Polyurethane (Gray)(Flat tread)
406	Aluminium core Polyurethane (Red)(Flat tread)	807	Nylon core High-strength Polyurethane (Blue)(Round tread)
407	Aluminium core Polyurethane (Yellow)(Round tread)	808	Nylon core High-strength Polyurethane (Blue)(Flat tread)
408	Aluminium core Polyurethane (Yellow)(Flat tread)	809	Nylon core Meijing Polyurethane (Green)(Round tread)
409	Cast steel core Polyurethane (Yellow)	810	Nylon core Meijing Polyurethane (Green)(Flat tread)
410	Iron core Polyurethane (White)(Round tread)	811	Nylon core Super Tenacity Polyurethane (Yellow)(Round tread)
411	Iron core Polyurethane (White)(Flat tread)	812	Nylon core Super Tenacity Polyurethane (Yellow)(Flat tread)
412	Steel core Polyurethane (Green)(Round tread)		

脚轮产品指引 Caster product guide

EB1-6系列脚轮	EB1-6 series caster	25-125mm	10-70kg	13-19
EC1-3系列脚轮	EC1-3 series caster	75-125mm	50-70kg	20-28
ED1-5系列脚轮	ED1-5 series caster	50-125mm	50-100kg	29-39
EF1-17系列脚轮	EF1-17 series caster	40-150mm	40-530kg	40-63
EG1-6系列脚轮	EG1-6 series caster	100-200mm	150-350kg	64-70
EH1-23系列脚轮	EH1-23 series caster	100-250mm	125-650kg	71-93
EK1-5系列脚轮	EK1-5 series caster	100-300mm	300-2000kg	94-99
EP1-14系列脚轮	EP1-14 series caster	65-125mm	50-100kg	100-111
ES1-3系列脚轮	ES1-3 series caster	100-400mm	300-12000kg	112-114
ET1-8系列脚轮	ET1-8 series caster	80-200mm	350-600kg	115-118

EB1-6系列脚轮 EB1-6 series caster

環球脚輪
GLOBE CASTER

轮径 25-125mm Wheel diameter 25-125mm

承载 10-70kg Load capacity 10-70kg





高级聚氨脂轮(黑色)
High-class PU wheel(Black)



超级聚氨脂轮(红色)
Super PU wheel(Red)



超静聚氨脂轮(灰色)
Super muting PU wheel(Gray)



PP轮(黑色)
PP wheel(Black)



尼龙轮(白色)
Nylon wheel(White)



铸铁轮
Cast iron wheel

EB1系列-平底型-活动式/固定式(镀锌) EB1 Series-Top plate type-Swivel/Rigid(Zinc plating)



活动
Swivel



固定
Rigid



边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	边刹活动 Swivel w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
1"	EB01-41-025S-302	EB01-41-025R-302		25	13	10	高级聚氨脂 High-class polyurethane	光身 Nude	35	25	38X33（活动） 36X20（固定）	30X24（活动） 29X13（固定）	4. 1
	EB01-41-025S-304	EB01-41-025R-304				10	超级聚氨脂 Super polyurethane						
	EB01-41-025S-306	EB01-41-025R-306				10	超静聚氨脂 Super muting polyurethane						
	EB01-41-025S-502	EB01-41-025R-502				10	高强度人造胶 High-strength artificial rubber						
	EB01-41-025S-701	EB01-41-025R-701				10	铸 铁 Cast iron						
1 1/4"	EB01-41-032S-302	EB01-41-032R-302		32	13	16	高级聚氨脂 High-class polyurethane	光身 Nude	43	30	38X33（活动） 36X20（固定）	30X24（活动） 29X13（固定）	4. 1
	EB01-41-032S-304	EB01-41-032R-304				16	超级聚氨脂 Super polyurethane						
	EB01-41-032S-306	EB01-41-032R-306				16	超静聚氨脂 Super muting polyurethane						
	EB01-41-032S-502	EB01-41-032R-502				16	高强度人造胶 High-strength artificial rubber						
	EB01-41-032S-701	EB01-41-032R-701				16	铸 铁 Cast iron						
1 1/2"	EB01-41-038S-302	EB01-41-038R-302	EB01-41-038SC-302	38	17	20	高级聚氨脂 High-class polyurethane	光身 Nude	51	36	46X38（活动） 46X25（固定）	36X28（活动） 36X15（固定）	5. 1
	EB01-41-038S-304	EB01-41-038R-304	EB01-41-038SC-304			20	超级聚氨脂 Super polyurethane						
	EB01-41-038S-306	EB01-41-038R-306	EB01-41-038SC-306			20	超静聚氨脂 Super muting polyurethane						
	EB01-41-038S-502	EB01-41-038R-502	EB01-41-038SC-502			20	高强度人造胶 High-strength artificial rubber						
	EB01-41-038S-701	EB01-41-038R-701	EB01-41-038SC-701			20	铸 铁 Cast iron						
2"	EB01-41-050S-302	EB01-41-050R-302	EB01-41-050SC-302	50	22	30	高级聚氨脂 High-class polyurethane	光身 Nude	66	48	58X47（活动） 58X40（固定）	46X35（活动） 45X25（固定）	6. 1
	EB01-41-050S-304	EB01-41-050R-304	EB01-41-050SC-304			30	超级聚氨脂 Super polyurethane						
	EB01-41-050S-306	EB01-41-050R-306	EB01-41-050SC-306			30	超静聚氨脂 Super muting polyurethane						
	EB01-41-050S-502	EB01-41-050R-502	EB01-41-050SC-502			30	高强度人造胶 High-strength artificial rubber						
	EB01-41-050S-701	EB01-41-050R-701	EB01-41-050SC-701			30	铸 铁 Cast iron						
2 1/2"	EB01-41-065S-302	EB01-41-065R-302	EB01-41-065SC-302	65	27	40	高级聚氨脂 High-class polyurethane	光身 Nude	82	61	70X58（活动） 70X47（固定）	55X42（活动） 55X28（固定）	8. 1
	EB01-41-065S-304	EB01-41-065R-304	EB01-41-065SC-304			40	超级聚氨脂 Super polyurethane						
	EB01-41-065S-306	EB01-41-065R-306	EB01-41-065SC-306			40	超静聚氨脂 Super muting polyurethane						
	EB01-41-065S-502	EB01-41-065R-502	EB01-41-065SC-502			40	高强度人造胶 High-strength artificial rubber						
	EB01-41-065S-701	EB01-41-065R-701	EB01-41-065SC-701			40	铸 铁 Cast iron						
3"	EB01-41-075S-302	EB01-41-075R-302	EB01-41-075SC-302	75	27	50	高级聚氨脂 High-class polyurethane	光身 Nude	93	66	70X58（活动） 70X47（固定）	55X42（活动） 55X28（固定）	8. 1
	EB01-41-075S-304	EB01-41-075R-304	EB01-41-075SC-304			50	超级聚氨脂 Super polyurethane						
	EB01-41-075S-306	EB01-41-075R-306	EB01-41-075SC-306			50	超静聚氨脂 Super muting polyurethane						
	EB01-41-075S-502	EB01-41-075R-502	EB01-41-075SC-502			50	高强度人造胶 High-strength artificial rubber						
	EB01-41-075S-701	EB01-41-075R-701	EB01-41-075SC-701			50	铸 铁 Cast iron						



高级聚氨脂轮
High-class PU caster



超级聚氨脂轮
Super PU caster



超静聚氨脂轮
Super muting PU caster



铸铁轮
Cast iron caster



丝杆
Threaded stem



丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No. 丝杆活动 Threaded stem	丝杆边刹 Threaded stem w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	丝杆规格 Threaded stem size (mm)
1"	EB01-41-025M-302		25	13	10	高级聚氨脂 High-class polyurethane	光身 Nude	40	27	8X15
	EB01-41-025M-304				10	超级聚氨脂 Super polyurethane				
	EB01-41-025M-306				10	超静聚氨脂 Super muting polyurethane				
	EB01-41-025M-502				10	高强度人造胶 High-strength artificial rubber				
	EB01-41-025M-701				10	铸 铁 Cast iron				
1 1/4"	EB01-41-032M-302		32	13	16	高级聚氨脂 High-class polyurethane	光身 Nude	46	31	8X15
	EB01-41-032M-304				16	超级聚氨脂 Super polyurethane				
	EB01-41-032M-306				16	超静聚氨脂 Super muting polyurethane				
	EB01-41-032M-502				16	高强度人造胶 High-strength artificial rubber				
	EB01-41-032M-701				16	铸 铁 Cast iron				
1 1/2"	EB01-41-038M-302	EB01-41-038MC-302	38	17	20	高级聚氨脂 High-class polyurethane	光身 Nude	56	36	8X15
	EB01-41-038M-304	EB01-41-038MC-304			20	超级聚氨脂 Super polyurethane				
	EB01-41-038M-306	EB01-41-038MC-306			20	超静聚氨脂 Super muting polyurethane				
	EB01-41-038M-502	EB01-41-038MC-502			20	高强度人造胶 High-strength artificial rubber				
	EB01-41-038M-701	EB01-41-038MC-701			20	铸 铁 Cast iron				
2"	EB01-41-050M-302	EB01-41-050MC-302	50	22	30	高级聚氨脂 High-class polyurethane	光身 Nude	68	48	10X15 (12X25)
	EB01-41-050M-304	EB01-41-050MC-304			30	超级聚氨脂 Super polyurethane				
	EB01-41-050M-306	EB01-41-050MC-306			30	超静聚氨脂 Super muting polyurethane				
	EB01-41-050M-502	EB01-41-050MC-502			30	高强度人造胶 High-strength artificial rubber				
	EB01-41-050M-701	EB01-41-050MC-701			30	铸 铁 Cast iron				
2 1/2"	EB01-41-065M-302	EB01-41-065MC-302	65	27	40	高级聚氨脂 High-class polyurethane	光身 Nude	85	61	12X25 (12X35)
	EB01-41-065M-304	EB01-41-065MC-304			40	超级聚氨脂 Super polyurethane				
	EB01-41-065M-306	EB01-41-065MC-306			40	超静聚氨脂 Super muting polyurethane				
	EB01-41-065M-502	EB01-41-065MC-502			40	高强度人造胶 High-strength artificial rubber				
	EB01-41-065M-701	EB01-41-065MC-701			40	铸 铁 Cast iron				
3"	EB01-41-075M-302	EB01-41-075MC-302	75	27	50	高级聚氨脂 High-class polyurethane	光身 Nude	95	66	12X25 (12X35)
	EB01-41-075M-304	EB01-41-075MC-304			50	超级聚氨脂 Super polyurethane				
	EB01-41-075M-306	EB01-41-075MC-306			50	超静聚氨脂 Super muting polyurethane				
	EB01-41-075M-502	EB01-41-075MC-502			50	高强度人造胶 High-strength artificial rubber				
	EB01-41-075M-701	EB01-41-075MC-701			50	铸 铁 Cast iron				



高级聚氨脂轮
High-class PU caster



超级聚氨脂轮
Super PU caster



超静聚氨脂轮
Super muting PU caster



铸铁轮
Cast iron caster

EB2系列-平底型-活动式/固定式(镀锌) EB2 Series-Top plate type-Swivel/Rigid(Zinc plating)



活动
Swivel



固定
Rigid



边刹活动
Swivel w/side brake

规格 Size	编号 Code No.			轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
	活 动 Swivel	固 定 Rigid	边刹活动 Swivel w/side brake										
1"	EB02-41-025S-201	EB02-41-025R-201		25	13	10	PP Polypropylene	光身 Nude	35	25	38X33 (活动) 36X20 (固定)	30X24 (活动) 29X13 (固定)	4. 1
	EB02-41-025S-210	EB02-41-025R-210				10	尼 龙 Nylon						
1 1/4"	EB02-41-032S-201	EB02-41-032R-201		32	13	16	PP Polypropylene	光身 Nude	43	30	38X33 (活动) 36X20 (固定)	30X24 (活动) 29X13 (固定)	4. 1
	EB02-41-032S-210	EB02-41-032R-210				16	尼 龙 Nylon						
1 1/2"	EB02-41-038S-201	EB02-41-038R-201	EB02-41-038SC-201	38	17	20	PP Polypropylene	光身 Nude	51	36	46X38 (活动) 46X25 (固定)	36X28 (活动) 36X15 (固定)	5. 1
	EB02-41-038S-210	EB02-41-038R-210	EB02-41-038SC-210			20	尼 龙 Nylon						
2"	EB02-41-050S-201	EB02-41-050R-201	EB02-41-050SC-201	50	22	30	PP Polypropylene	光身 Nude	66	48	58X47 (活动) 58X40 (固定)	46X35 (活动) 45X25 (固定)	6. 1
	EB02-41-050S-210	EB02-41-050R-210	EB02-41-050SC-210			30	尼 龙 Nylon						
2 1/2"	EB02-41-065S-201	EB02-41-065R-201	EB02-41-065SC-201	65	27	40	PP Polypropylene	光身 Nude	82	61	70X58 (活动) 70X47 (固定)	55X42 (活动) 55X28 (固定)	8. 1
	EB02-41-065S-210	EB02-41-065R-210	EB02-41-065SC-210			40	尼 龙 Nylon						
3"	EB02-41-075S-201	EB02-41-075R-201	EB02-41-075SC-201	75	27	50	PP Polypropylene	光身 Nude	93	66	70X58 (活动) 70X47 (固定)	55X42 (活动) 55X28 (固定)	8. 1
	EB02-41-075S-210	EB02-41-075R-210	EB02-41-075SC-210			50	尼 龙 Nylon						



PP轮
PP caster



尼龙轮
Nylon caster

EB2系列-丝杆型(镀锌) EB2 Series-Threaded stem type(Zinc plating)



丝杆
Threaded stem



丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No.		轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	丝杆规格 Threaded stem size (mm)
	丝杆活动 Threaded stem	丝杆边刹 Threaded stem w/side brake								
1"	EB02-41-025M-201		25	13	10	PP Polypropylene	光身 Nude	40	27	8X15
	EB02-41-025M-210				10	尼 龙 Nylon				
1¼"	EB02-41-032M-201		32	13	16	PP Polypropylene	光身 Nude	46	31	8X15
	EB02-41-032M-210				16	尼 龙 Nylon				
1½"	EB02-41-038M-201	EB02-41-038MC-201	38	17	20	PP Polypropylene	光身 Nude	56	36	8X15
	EB02-41-038M-210	EB02-41-038MC-210			20	尼 龙 Nylon				
2"	EB02-41-050M-201	EB02-41-050MC-201	50	22	30	PP Polypropylene	光身 Nude	68	48	10X15 (12X25)
	EB02-41-050M-210	EB02-41-050MC-210			30	尼 龙 Nylon				
2½"	EB02-41-065M-201	EB02-41-065MC-201	65	27	40	PP Polypropylene	光身 Nude	85	61	12X25 (12X35)
	EB02-41-065M-210	EB02-41-065MC-210			40	尼 龙 Nylon				
3"	EB02-41-075M-201	EB02-41-075MC-201	75	27	50	PP Polypropylene	光身 Nude	95	66	12X25 (12X35)
	EB02-41-075M-210	EB02-41-075MC-210			50	尼 龙 Nylon				



PP轮
PP caster



尼龙轮
Nylon caster

EB3系列-平底型-活动式/固定式(镀铬) EB3 Series-Top plate type-Swivel/Rigid(Chrome plating)



活动
Swivel



固定
Rigid



边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	边刹活动 Swivel w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
1"	EB03-44-025S-302	EB03-44-025R-302		25	13	10	高级聚氨脂 High-class polyurethane	光身 Nude	35	25	38X33 (活动) 36X20 (固定)	30X24 (活动) 29X13 (固定)	4. 1
	EB03-44-025S-304	EB03-44-025R-304				10	超级聚氨脂 Super polyurethane						
	EB03-44-025S-306	EB03-44-025R-306				10	超静聚氨脂 Super muting polyurethane						
	EB03-44-025S-502	EB03-44-025R-502				10	高强度人造胶 High-strength artificial rubber						
	EB03-44-025S-701	EB03-44-025R-701				10	铸 铁 Cast iron						
1 1/4"	EB03-44-032S-302	EB03-44-032R-302		32	13	16	高级聚氨脂 High-class polyurethane	光身 Nude	43	30	38X33 (活动) 36X20 (固定)	30X24 (活动) 29X13 (固定)	4. 1
	EB03-44-032S-304	EB03-44-032R-304				16	超级聚氨脂 Super polyurethane						
	EB03-44-032S-306	EB03-44-032R-306				16	超静聚氨脂 Super muting polyurethane						
	EB03-44-032S-502	EB03-44-032R-502				16	高强度人造胶 High-strength artificial rubber						
	EB03-44-032S-701	EB03-44-032R-701				16	铸 铁 Cast iron						
1 1/2"	EB03-44-038S-302	EB03-44-038R-302	EB03-44-038SC-302	38	17	20	高级聚氨脂 High-class polyurethane	光身 Nude	51	36	46X38 (活动) 46X25 (固定)	36X28 (活动) 36X15 (固定)	5. 1
	EB03-44-038S-304	EB03-44-038R-304	EB03-44-038SC-304			20	超级聚氨脂 Super polyurethane						
	EB03-44-038S-306	EB03-44-038R-306	EB03-44-038SC-306			20	超静聚氨脂 Super muting polyurethane						
	EB03-44-038S-502	EB03-44-038R-502	EB03-44-038SC-502			20	高强度人造胶 High-strength artificial rubber						
	EB03-44-038S-701	EB03-44-038R-701	EB03-44-038SC-701			20	铸 铁 Cast iron						
2"	EB03-44-050S-302	EB03-44-050R-302	EB03-44-050SC-302	50	22	30	高级聚氨脂 High-class polyurethane	光身 Nude	66	48	58X47 (活动) 58X40 (固定)	46X35 (活动) 45X25 (固定)	6. 1
	EB03-44-050S-304	EB03-44-050R-304	EB03-44-050SC-304			30	超级聚氨脂 Super polyurethane						
	EB03-44-050S-306	EB03-44-050R-306	EB03-44-050SC-306			30	超静聚氨脂 Super muting polyurethane						
	EB03-44-050S-502	EB03-44-050R-502	EB03-44-050SC-502			30	高强度人造胶 High-strength artificial rubber						
	EB03-44-050S-701	EB03-44-050R-701	EB03-44-050SC-701			30	铸 铁 Cast iron						
2 1/2"	EB03-44-065S-302	EB03-44-065R-302	EB03-44-065SC-302	65	27	40	高级聚氨脂 High-class polyurethane	光身 Nude	82	61	70X58 (活动) 70X47 (固定)	55X42 (活动) 55X28 (固定)	8. 1
	EB03-44-065S-304	EB03-44-065R-304	EB03-44-065SC-304			40	超级聚氨脂 Super polyurethane						
	EB03-44-065S-306	EB03-44-065R-306	EB03-44-065SC-306			40	超静聚氨脂 Super muting polyurethane						
	EB03-44-065S-502	EB03-44-065R-502	EB03-44-065SC-502			40	高强度人造胶 High-strength artificial rubber						
	EB03-44-065S-701	EB03-44-065R-701	EB03-44-065SC-701			40	铸 铁 Cast iron						
3"	EB03-44-075S-302	EB03-44-075R-302	EB03-44-075SC-302	75	27	50	高级聚氨脂 High-class polyurethane	光身 Nude	93	66	70X58 (活动) 70X47 (固定)	55X42 (活动) 55X28 (固定)	8. 1
	EB03-44-075S-304	EB03-44-075R-304	EB03-44-075SC-304			50	超级聚氨脂 Super polyurethane						
	EB03-44-075S-306	EB03-44-075R-306	EB03-44-075SC-306			50	超静聚氨脂 Super muting polyurethane						
	EB03-44-075S-502	EB03-44-075R-502	EB03-44-075SC-502			50	高强度人造胶 High-strength artificial rubber						
	EB03-44-075S-701	EB03-44-075R-701	EB03-44-075SC-701			50	铸 铁 Cast iron						



高级聚氨脂轮
High-class PU caster



超级聚氨脂轮
Super PU caster



超静聚氨脂轮
Super muting PU caster



铸铁轮
Cast iron caster



丝杆
Threaded stem



丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No. 丝杆活动 Threaded stem	丝杆边刹 Threaded stem w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	丝杆规格 Threaded stem size (mm)
1"	EB03-44-025M-302		25	13	10	高级聚氨脂 High-class polyurethane	光身 Nude	40	27	8X15
	EB03-44-025M-304				10	超级聚氨脂 Super polyurethane				
	EB03-44-025M-306				10	超静聚氨脂 Super muting polyurethane				
	EB03-44-025M-502				10	高强度人造胶 High-strength artificial rubber				
	EB03-44-025M-701				10	铸 铁 Cast iron				
1 1/4"	EB03-44-032M-302		32	13	16	高级聚氨脂 High-class polyurethane	光身 Nude	46	31	8X15
	EB03-44-032M-304				16	超级聚氨脂 Super polyurethane				
	EB03-44-032M-306				16	超静聚氨脂 Super muting polyurethane				
	EB03-44-032M-502				16	高强度人造胶 High-strength artificial rubber				
	EB03-44-032M-701				16	铸 铁 Cast iron				
1 1/2"	EB03-44-038M-302	EB03-44-038MC-302	38	17	20	高级聚氨脂 High-class polyurethane	光身 Nude	56	36	8X15
	EB03-44-038M-304	EB03-44-038MC-304			20	超级聚氨脂 Super polyurethane				
	EB03-44-038M-306	EB03-44-038MC-306			20	超静聚氨脂 Super muting polyurethane				
	EB03-44-038M-502	EB03-44-038MC-502			20	高强度人造胶 High-strength artificial rubber				
	EB03-44-038M-701	EB03-44-038MC-701			20	铸 铁 Cast iron				
2"	EB03-44-050M-302	EB03-44-050MC-302	50	22	30	高级聚氨脂 High-class polyurethane	光身 Nude	68	48	10X15 (12X25)
	EB03-44-050M-304	EB03-44-050MC-304			30	超级聚氨脂 Super polyurethane				
	EB03-44-050M-306	EB03-44-050MC-306			30	超静聚氨脂 Super muting polyurethane				
	EB03-44-050M-502	EB03-44-050MC-502			30	高强度人造胶 High-strength artificial rubber				
	EB03-44-050M-701	EB03-44-050MC-701			30	铸 铁 Cast iron				
2 1/2"	EB03-44-065M-302	EB03-44-065MC-302	65	27	40	高级聚氨脂 High-class polyurethane	光身 Nude	85	61	12X25 (12X35)
	EB03-44-065M-304	EB03-44-065MC-304			40	超级聚氨脂 Super polyurethane				
	EB03-44-065M-306	EB03-44-065MC-306			40	超静聚氨脂 Super muting polyurethane				
	EB03-44-065M-502	EB03-44-065MC-502			40	高强度人造胶 High-strength artificial rubber				
	EB03-44-065M-701	EB03-44-065MC-701			40	铸 铁 Cast iron				
3"	EB03-44-075M-302	EB03-44-075MC-302	75	27	50	高级聚氨脂 High-class polyurethane	光身 Nude	95	66	12X25 (12X35)
	EB03-44-075M-304	EB03-44-075MC-304			50	超级聚氨脂 Super polyurethane				
	EB03-44-075M-306	EB03-44-075MC-306			50	超静聚氨脂 Super muting polyurethane				
	EB03-44-075M-502	EB03-44-075MC-502			50	高强度人造胶 High-strength artificial rubber				
	EB03-44-075M-701	EB03-44-075MC-701			50	铸 铁 Cast iron				



高级聚氨脂轮
High-class PU caster



超级聚氨脂轮
Super PU caster



超静聚氨脂轮
Super muting PU caster



铸铁轮
Cast iron caster

EC1-3系列脚轮 EC1-3 series caster

環球脚輪
GLOBE CASTER

轮径 75-125mm Wheel diameter 75-125mm

承载 50-70kg Load capacity 50-70kg







高级聚氨脂轮(园边)
High-class PU wheel(Round)

超静聚氨脂轮(园边)
Super muting PU wheel(Round)

高强度人造胶轮(园边)
High-strength artificial rubber wheel(Round)

高级聚氨脂轮(平边)
High-class PU wheel(Flat)

超静聚氨脂轮(平边)
Super muting PU wheel(Flat)

高强度人造胶轮(平边)
High-strength artificial rubber wheel(Flat)

超静聚氨脂轮(平边)
Super muting PU wheel(Flat)



活动
Swivel



固定
Rigid



双刹活动
Swivel w/dual brake



边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	双刹活动 Swivel w/dual brake	边刹活动 Swivel w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
3"	EC01-11-075S-301	EC01-11-075R-301	EC01-11-075SA-301	EC01-11-075SC-301	75	25	50	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	101	73	99	79X60	58X40	9
	EC01-11-075S-305	EC01-11-075R-305	EC01-11-075SA-305	EC01-11-075SC-305			50	超静聚氨脂 Super muting polyurethane							
	EC01-11-075S-501	EC01-11-075R-501	EC01-11-075SA-501	EC01-11-075SC-501			50	高强度人造胶 High-strength artificial rubber							
4"	EC01-11-100S-301	EC01-11-100R-301	EC01-11-100SA-301	EC01-11-100SC-301	100	25	60	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	126	88	102	79X60	58X40	9
	EC01-11-100S-305	EC01-11-100R-305	EC01-11-100SA-305	EC01-11-100SC-305			60	超静聚氨脂 Super muting polyurethane							
	EC01-11-100S-501	EC01-11-100R-501	EC01-11-100SA-501	EC01-11-100SC-501			60	高强度人造胶 High-strength artificial rubber							
5"	EC01-11-125S-301	EC01-11-125R-301	EC01-11-125SA-301	EC01-11-125SC-301	125	25	70	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	151	103	106	79X60	58X40	9
	EC01-11-125S-305	EC01-11-125R-305	EC01-11-125SA-305	EC01-11-125SC-305			70	超静聚氨脂 Super muting polyurethane							
	EC01-11-125S-501	EC01-11-125R-501	EC01-11-125SA-501	EC01-11-125SC-501			70	高强度人造胶 High-strength artificial rubber							



高级聚氨脂轮
High-class PU caster



超静聚氨脂轮
Super muting PU caster



高强度人造胶轮
High-strength artificial rubber caster

EC1系列-丝杆型 EC1 Series-Threaded stem type



丝杆
Threaded stem



丝杆双刹
Threaded stem w/dual brake



丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No. 丝杆活动 Threaded stem	丝杆双刹 Threaded stem w/dual brake	丝杆边刹 Threaded stem w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	丝杆规格 Threaded stem size (mm)
3"	EC01-11-075M-301	EC01-11-075MA-301	EC01-11-075MC-301	75	25	50	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	105	73	99	12X25
	EC01-11-075M-305	EC01-11-075MA-305	EC01-11-075MC-305			50	超静聚氨脂 Super muting polyurethane					
	EC01-11-075M-501	EC01-11-075MA-501	EC01-11-075MC-501			50	高强度人造胶 High-strength artificial rubber					
4"	EC01-11-100M-301	EC01-11-100MA-301	EC01-11-100MC-301	100	25	60	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	130	88	102	12X25
	EC01-11-100M-305	EC01-11-100MA-305	EC01-11-100MC-305			60	超静聚氨脂 Super muting polyurethane					
	EC01-11-100M-501	EC01-11-100MA-501	EC01-11-100MC-501			60	高强度人造胶 High-strength artificial rubber					
5"	EC01-11-125M-301	EC01-11-125MA-301	EC01-11-125MC-301	125	25	70	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	155	103	106	12X25
	EC01-11-125M-305	EC01-11-125MA-305	EC01-11-125MC-305			70	超静聚氨脂 Super muting polyurethane					
	EC01-11-125M-501	EC01-11-125MA-501	EC01-11-125MC-501			70	高强度人造胶 High-strength artificial rubber					



高级聚氨脂轮
High-class PU caster



超静聚氨脂轮
Super muting PU caster



高强度人造胶轮
High-strength artificial rubber caster



空心钉
Bolt hole



双刹空心钉
Bolt hole w/dual brake



边刹空心钉
Bolt hole w/side brake

规格 Size	编号 Code No.			轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	孔径 Hole Dia. (mm)
	空心钉 Bolt hole	双刹空心钉 Bolt hole w/dual brake	边刹空心钉 Bolt hole w/side brake									
3"	EC01-11-075PS-301	EC01-11-075PA-301	EC01-11-075PC-301	75	25	50	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	99	73	99	12
	EC01-11-075PS-305	EC01-11-075PA-305	EC01-11-075PC-305			50	超静聚氨脂 Super muting polyurethane					
	EC01-11-075PS-501	EC01-11-075PA-501	EC01-11-075PC-501			50	高强度人造胶 High-strength artificial rubber					
4"	EC01-11-100PS-301	EC01-11-100PA-301	EC01-11-100PC-301	100	25	60	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	125	88	102	12
	EC01-11-100PS-305	EC01-11-100PA-305	EC01-11-100PC-305			60	超静聚氨脂 Super muting polyurethane					
	EC01-11-100PS-501	EC01-11-100PA-501	EC01-11-100PC-501			60	高强度人造胶 High-strength artificial rubber					
5"	EC01-11-125PS-301	EC01-11-125PA-301	EC01-11-125PC-301	125	25	70	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	149	103	106	12
	EC01-11-125PS-305	EC01-11-125PA-305	EC01-11-125PC-305			70	超静聚氨脂 Super muting polyurethane					
	EC01-11-125PS-501	EC01-11-125PA-501	EC01-11-125PC-501			70	高强度人造胶 High-strength artificial rubber					



高级聚氨脂轮
High-class PU caster



超静聚氨脂轮
Super muting PU caster



高强度人造胶轮
High-strength artificial rubber caster

EC1系列-丝杆型-带膨胀胶 EC1 Series-Threaded stem type-With Expanding Adapter



丝杆
Threaded stem



丝杆双刹
Threaded stem w/dual brake



丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No.			轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	丝杆规格 Threaded stem size (mm)
	丝杆活动 Threaded stem	丝杆双刹 Threaded stem w/dual brake	丝杆边刹 Threaded stem w/side brake									
3"	EC01-11-075G-301	EC01-11-075GA-301	EC01-11-075GC-301	75	25	50	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	105	73	99	12X59
	EC01-11-075G-305	EC01-11-075GA-305	EC01-11-075GC-305			50	超静聚氨脂 Super muting polyurethane					
	EC01-11-075G-501	EC01-11-075GA-501	EC01-11-075GC-501			50	高强度人造胶 High-strength artificial rubber					
4"	EC01-11-100G-301	EC01-11-100GA-301	EC01-11-100GC-301	100	25	60	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	130	88	102	12X59
	EC01-11-100G-305	EC01-11-100GA-305	EC01-11-100GC-305			60	超静聚氨脂 Super muting polyurethane					
	EC01-11-100G-501	EC01-11-100GA-501	EC01-11-100GC-501			60	高强度人造胶 High-strength artificial rubber					
5"	EC01-11-125G-301	EC01-11-125GA-301	EC01-11-125GC-301	125	25	70	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	155	103	106	12X59
	EC01-11-125G-305	EC01-11-125GA-305	EC01-11-125GC-305			70	超静聚氨脂 Super muting polyurethane					
	EC01-11-125G-501	EC01-11-125GA-501	EC01-11-125GC-501			70	高强度人造胶 High-strength artificial rubber					



高级聚氨脂轮
High-class PU caster



超静聚氨脂轮
Super muting PU caster



高强度人造胶轮
High-strength artificial rubber caster



活动
Swivel



固定
Rigid



双刹活动
Swivel w/dual brake



边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	双刹活动 Swivel w/dual brake	边刹活动 Swivel w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
3"	EC02-11-075S-302	EC02-11-075R-302	EC02-11-075SA-302	EC02-11-075SC-302	75	25	50	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	101	73	99	79X60	58X40	9
	EC02-11-075S-306	EC02-11-075R-306	EC02-11-075SA-306	EC02-11-075SC-306			50	超静聚氨脂 Super muting polyurethane							
	EC02-11-075S-502	EC02-11-075R-502	EC02-11-075SA-502	EC02-11-075SC-502			50	高强度人造胶 High-strength artificial rubber							
4"	EC02-11-100S-302	EC02-11-100R-302	EC02-11-100SA-302	EC02-11-100SC-302	100	25	60	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	126	88	102	79X60	58X40	9
	EC02-11-100S-306	EC02-11-100R-306	EC02-11-100SA-306	EC02-11-100SC-306			60	超静聚氨脂 Super muting polyurethane							
	EC02-11-100S-502	EC02-11-100R-502	EC02-11-100SA-502	EC02-11-100SC-502			60	高强度人造胶 High-strength artificial rubber							
5"	EC02-11-125S-302	EC02-11-125R-302	EC02-11-125SA-302	EC02-11-125SC-302	125	25	70	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	151	103	106	79X60	58X40	9
	EC02-11-125S-306	EC02-11-125R-306	EC02-11-125SA-306	EC02-11-125SC-306			70	超静聚氨脂 Super muting polyurethane							
	EC02-11-125S-502	EC02-11-125R-502	EC02-11-125SA-502	EC02-11-125SC-502			70	高强度人造胶 High-strength artificial rubber							



高级聚氨脂轮
High-class PU caster



超静聚氨脂轮
Super muting PU caster



高强度人造胶轮
High-strength artificial rubber caster

EC2系列-丝杆型 EC2 Series-Threaded stem type



丝杆
Threaded stem



丝杆双刹
Threaded stem w/dual brake



丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No.			轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	丝杆规格 Threaded stem size (mm)
	丝杆活动 Threaded stem	丝杆双刹 Threaded stem w/dual brake	丝杆边刹 Threaded stem w/side brake									
3"	EC02-11-075M-302	EC02-11-075MA-302	EC02-11-075MC-302	75	25	50	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	105	73	99	12X25
	EC02-11-075M-306	EC02-11-075MA-306	EC02-11-075MC-306			50	超静聚氨脂 Super muting polyurethane					
	EC02-11-075M-502	EC02-11-075MA-502	EC02-11-075MC-502			50	高强度人造胶 High-strength artificial rubber					
4"	EC02-11-100M-302	EC02-11-100MA-302	EC02-11-100MC-302	100	25	60	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	130	88	102	12X25
	EC02-11-100M-306	EC02-11-100MA-306	EC02-11-100MC-306			60	超静聚氨脂 Super muting polyurethane					
	EC02-11-100M-502	EC02-11-100MA-502	EC02-11-100MC-502			60	高强度人造胶 High-strength artificial rubber					
5"	EC02-11-125M-302	EC02-11-125MA-302	EC02-11-125MC-302	125	25	70	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	155	103	106	12X25
	EC02-11-125M-306	EC02-11-125MA-306	EC02-11-125MC-306			70	超静聚氨脂 Super muting polyurethane					
	EC02-11-125M-502	EC02-11-125MA-502	EC02-11-125MC-502			70	高强度人造胶 High-strength artificial rubber					



高级聚氨脂轮
High-class PU caster



超静聚氨脂轮
Super muting PU caster



高强度人造胶轮
High-strength artificial rubber caster



空心钉
Bolt hole



双刹空心钉
Bolt hole w/dual brake



边刹空心钉
Bolt hole w/side brake

规格 Size	编号 Code No. 空心钉 Bolt hole	双刹空心钉 Bolt hole w/dual brake	边刹空心钉 Bolt hole w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	孔径 Hole Dia. (mm)
3"	EC02-11-075PS-302	EC02-11-075PA-302	EC02-11-075PC-302	75	25	50	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	99	73	99	12
	EC02-11-075PS-306	EC02-11-075PA-306	EC02-11-075PC-306			50	超静聚氨脂 Super muting polyurethane					
	EC02-11-075PS-502	EC02-11-075PA-502	EC02-11-075PC-502			50	高强度人造胶 High-strength artificial rubber					
4"	EC02-11-100PS-302	EC02-11-100PA-302	EC02-11-100PC-302	100	25	60	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	125	88	102	12
	EC02-11-100PS-306	EC02-11-100PA-306	EC02-11-100PC-306			60	超静聚氨脂 Super muting polyurethane					
	EC02-11-100PS-502	EC02-11-100PA-502	EC02-11-100PC-502			60	高强度人造胶 High-strength artificial rubber					
5"	EC02-11-125PS-302	EC02-11-125PA-302	EC02-11-125PC-302	125	25	70	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	149	103	106	12
	EC02-11-125PS-306	EC02-11-125PA-306	EC02-11-125PC-306			70	超静聚氨脂 Super muting polyurethane					
	EC02-11-125PS-502	EC02-11-125PA-502	EC02-11-125PC-502			70	高强度人造胶 High-strength artificial rubber					



高级聚氨脂轮
High-class PU caster



超静聚氨脂轮
Super muting PU caster



高强度人造胶轮
High-strength artificial rubber caster

EC2系列-丝杆型-带膨胀胶 EC2 Series-Threaded stem type-With Expanding Adapter



丝杆
Threaded stem



丝杆双刹
Threaded stem w/dual brake



丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No. 丝杆活动 Threaded stem	丝杆双刹 Threaded stem w/dual brake	丝杆边刹 Threaded stem w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	丝杆规格 Threaded stem size (mm)
3"	EC02-11-075G-302	EC02-11-075GA-302	EC02-11-075GC-302	75	25	50	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	105	73	99	12X59
	EC02-11-075G-306	EC02-11-075GA-306	EC02-11-075GC-306			50	超静聚氨脂 Super muting polyurethane					
	EC02-11-075G-502	EC02-11-075GA-502	EC02-11-075GC-502			50	高强度人造胶 High-strength artificial rubber					
4"	EC02-11-100G-302	EC02-11-100GA-302	EC02-11-100GC-302	100	25	60	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	130	88	102	12X59
	EC02-11-100G-306	EC02-11-100GA-306	EC02-11-100GC-306			60	超静聚氨脂 Super muting polyurethane					
	EC02-11-100G-502	EC02-11-100GA-502	EC02-11-100GC-502			60	高强度人造胶 High-strength artificial rubber					
5"	EC02-11-125G-302	EC02-11-125GA-302	EC02-11-125GC-302	125	25	70	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	155	103	106	12X59
	EC02-11-125G-306	EC02-11-125GA-306	EC02-11-125GC-306			70	超静聚氨脂 Super muting polyurethane					
	EC02-11-125G-502	EC02-11-125GA-502	EC02-11-125GC-502			70	高强度人造胶 High-strength artificial rubber					



高级聚氨脂轮
High-class PU caster



超静聚氨脂轮
Super muting PU caster



高强度人造胶轮
High-strength artificial rubber caster

ED1-5系列脚轮 ED1-5 series caster

環球脚輪
GLOBE CASTER

轮径 50-125mm Wheel diameter 50-125mm

承载 50-100kg Load capacity 50-100kg





美力轮
Meili wheel

高强度聚氨脂轮
High-strength PU wheel

超静聚氨脂轮
super muting PU wheel

高级聚氨脂轮
High-class PU wheel

超静聚氨脂轮
super muting PU wheel

超级聚氨脂轮
super PU wheel

高强度人造胶轮
High-strength artificial rubber wheel

导电人造胶轮
Conductive artificial rubber wheel



活动
Swivel



固定
Rigid



双刹活动
Swivel w/dual brake



边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	双刹活动 Swivel w/dual brake	边刹活动 Swivel w/side brake	轮径 Wheel Dia (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
3"	ED01-11-075S-208	ED01-11-075R-208	ED01-11-075SA-208	ED01-11-075SC-208	75	28	60	美力 Mei li	滚珠 Ball bearing	107	75	120	94X67	73X45	9
	ED01-11-075S-308	ED01-11-075R-308	ED01-11-075SA-308	ED01-11-075SC-308			60	高强度聚氨脂 High-strength polyurethane							
	ED01-11-075S-306	ED01-11-075R-306	ED01-11-075SA-306	ED01-11-075SC-306			60	超静聚氨脂 Super muting polyurethane							
	ED01-11-075S-304	ED01-11-075R-304	ED01-11-075SA-304	ED01-11-075SC-304			60	超级聚氨脂 Super polyurethane							
4"	ED01-11-100S-208	ED01-11-100R-208	ED01-11-100SA-208	ED01-11-100SC-208	100	28	80	美力 Mei li	滚珠 Ball bearing	133	88	120	94X67	73X45	9
	ED01-11-100S-308	ED01-11-100R-308	ED01-11-100SA-308	ED01-11-100SC-308			80	高强度聚氨脂 High-strength polyurethane							
	ED01-11-100S-306	ED01-11-100R-306	ED01-11-100SA-306	ED01-11-100SC-306			80	超静聚氨脂 Super muting polyurethane							
	ED01-11-100S-304	ED01-11-100R-304	ED01-11-100SA-304	ED01-11-100SC-304			80	超级聚氨脂 Super polyurethane							
5"	ED01-11-125S-208	ED01-11-125R-208	ED01-11-125SA-208	ED01-11-125SC-208	125	30	100	美力 Mei li	滚珠 Ball bearing	158	103	120	94X67	73X45	9
	ED01-11-125S-308	ED01-11-125R-308	ED01-11-125SA-308	ED01-11-125SC-308			100	高强度聚氨脂 High-strength polyurethane							
	ED01-11-125S-306	ED01-11-125R-306	ED01-11-125SA-306	ED01-11-125SC-306			100	超静聚氨脂 Super muting polyurethane							
	ED01-11-125S-304	ED01-11-125R-304	ED01-11-125SA-304	ED01-11-125SC-304			100	超级聚氨脂 Super polyurethane							



美力轮
Meili caster



高强度聚氨脂轮
High-strength PU caster



超静聚氨脂轮
Super muting PU caster

ED1系列-丝杆型 ED1 Series-Threaded stem type



丝杆
Threaded stem



丝杆双刹
Threaded stem w/dual brake



丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No.			轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	丝杆规格 Threaded stem size (mm)
	丝杆活动 Threaded stem	丝杆双刹 Threaded stem w/dual brake	丝杆边刹 Threaded stem w/side brake									
3"	ED01-11-075M-208	ED01-11-075MA-208	ED01-11-075MC-208	75	28	60	美力 Mei li	滚珠 Ball bearing	110	75	120	12X25
	ED01-11-075M-308	ED01-11-075MA-308	ED01-11-075MC-308			60	高强度聚氨脂 High-strength polyurethane					
	ED01-11-075M-306	ED01-11-075MA-306	ED01-11-075MC-306			60	超静聚氨脂 Super muting polyurethane					
	ED01-11-075M-304	ED01-11-075MA-304	ED01-11-075MC-304			60	超级聚氨脂 Super polyurethane					
4"	ED01-11-100M-208	ED01-11-100MA-208	ED01-11-100MC-208	100	28	80	美力 Mei li	滚珠 Ball bearing	137	88	120	12X25
	ED01-11-100M-308	ED01-11-100MA-308	ED01-11-100MC-308			80	高强度聚氨脂 High-strength polyurethane					
	ED01-11-100M-306	ED01-11-100MA-306	ED01-11-100MC-306			80	超静聚氨脂 Super muting polyurethane					
	ED01-11-100M-304	ED01-11-100MA-304	ED01-11-100MC-304			80	超级聚氨脂 Super polyurethane					
5"	ED01-11-125M-208	ED01-11-125MA-208	ED01-11-125MC-208	125	30	100	美力 Mei li	滚珠 Ball bearing	160	103	120	12X25
	ED01-11-125M-308	ED01-11-125MA-308	ED01-11-125MC-308			100	高强度聚氨脂 High-strength polyurethane					
	ED01-11-125M-306	ED01-11-125MA-306	ED01-11-125MC-306			100	超静聚氨脂 Super muting polyurethane					
	ED01-11-125M-304	ED01-11-125MA-304	ED01-11-125MC-304			100	超级聚氨脂 Super polyurethane					



美力轮
Meili caster



高强度聚氨脂轮
High-strength PU caster



超静聚氨脂轮
Super muting PU caster



空心钉
Bolt hole



双刹空心钉
Bolt hole w/dual brake



边刹空心钉
Bolt hole w/side brake

规格 Size	编号 Code No.			轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	孔径 Hole Dia. (mm)
	空心钉 Bolt hole	双刹空心钉 Bolt hole w/dual brake	边刹空心钉 Bolt hole w/side brake									
3"	ED01-11-075PS-208	ED01-11-075PA-208	ED01-11-075PC-208	75	28	60	美力 Mei li	滚珠 Ball bearing	104	75	120	12
	ED01-11-075PS-308	ED01-11-075PA-308	ED01-11-075PC-308			60	高强度聚氨脂 High-strength polyurethane					
	ED01-11-075PS-306	ED01-11-075PA-306	ED01-11-075PC-306			60	超静聚氨脂 Super muting polyurethane					
	ED01-11-075PS-304	ED01-11-075PA-304	ED01-11-075PC-304			60	超级聚氨脂 Super polyurethane					
4"	ED01-11-100PS-208	ED01-11-100PA-208	ED01-11-100PC-208	100	28	80	美力 Mei li	滚珠 Ball bearing	130	88	120	12
	ED01-11-100PS-308	ED01-11-100PA-308	ED01-11-100PC-308			80	高强度聚氨脂 High-strength polyurethane					
	ED01-11-100PS-306	ED01-11-100PA-306	ED01-11-100PC-306			80	超静聚氨脂 Super muting polyurethane					
	ED01-11-100PS-304	ED01-11-100PA-304	ED01-11-100PC-304			80	超级聚氨脂 Super polyurethane					
5"	ED01-11-125PS-208	ED01-11-125PA-208	ED01-11-125PC-208	125	30	100	美力 Mei li	滚珠 Ball bearing	154	103	120	12
	ED01-11-125PS-308	ED01-11-125PA-308	ED01-11-125PC-308			100	高强度聚氨脂 High-strength polyurethane					
	ED01-11-125PS-306	ED01-11-125PA-306	ED01-11-125PC-306			100	超静聚氨脂 Super muting polyurethane					
	ED01-11-125PS-304	ED01-11-125PA-304	ED01-11-125PC-304			100	超级聚氨脂 Super polyurethane					



美力轮
Meili caster



高强度聚氨脂轮
High-strength PU caster



超静聚氨脂轮
Super muting PU caster

ED2系列-平底型-活动式/固定式 ED2 Series-Top plate type-Swivel/Rigid



活动
Swivel



固定
Rigid



双刹活动
Swivel w/dual brake



边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	双刹活动 Swivel w/dual brake	边刹活动 Swivel w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
3"	ED02-11-075S-301	ED02-11-075R-301	ED02-11-075SA-301	ED02-11-075SC-301	75	30	60	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	107	75	120	94X67	73X45	9
	ED02-11-075S-305	ED02-11-075R-305	ED02-11-075SA-305	ED02-11-075SC-305			60	超静聚氨脂 Super muting polyurethane							
	ED02-11-075S-303	ED02-11-075R-303	ED02-11-075SA-303	ED02-11-075SC-303			60	超级聚氨脂 Super polyurethane							
	ED02-11-075S-501	ED02-11-075R-501	ED02-11-075SA-501	ED02-11-075SC-501			60	高强度人造胶 High-strength artificial rubber							
	ED02-11-075S-507	ED02-11-075R-507	ED02-11-075SA-507	ED02-11-075SC-507			60	导电人造胶 Conductive artificial rubber							
4"	ED02-11-100S-301	ED02-11-100R-301	ED02-11-100SA-301	ED02-11-100SC-301	100	30	80	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	133	88	120	94X67	73X45	9
	ED02-11-100S-305	ED02-11-100R-305	ED02-11-100SA-305	ED02-11-100SC-305			80	超静聚氨脂 Super muting polyurethane							
	ED02-11-100S-303	ED02-11-100R-303	ED02-11-100SA-303	ED02-11-100SC-303			80	超级聚氨脂 Super polyurethane							
	ED02-11-100S-501	ED02-11-100R-501	ED02-11-100SA-501	ED02-11-100SC-501			80	高强度人造胶 High-strength artificial rubber							
	ED02-11-100S-507	ED02-11-100R-507	ED02-11-100SA-507	ED02-11-100SC-507			80	导电人造胶 Conductive artificial rubber							
5"	ED02-11-125S-301	ED02-11-125R-301	ED02-11-125SA-301	ED02-11-125SC-301	125	30	100	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	158	103	120	94X67	73X45	9
	ED02-11-125S-305	ED02-11-125R-305	ED02-11-125SA-305	ED02-11-125SC-305			100	超静聚氨脂 Super muting polyurethane							
	ED02-11-125S-303	ED02-11-125R-303	ED02-11-125SA-303	ED02-11-125SC-303			100	超级聚氨脂 Super polyurethane							
	ED02-11-125S-501	ED02-11-125R-501	ED02-11-125SA-501	ED02-11-125SC-501			100	高强度人造胶 High-strength artificial rubber							
	ED02-11-125S-507	ED02-11-125R-507	ED02-11-125SA-507	ED02-11-125SC-507			100	导电人造胶 Conductive artificial rubber							



高级聚氨脂轮
High-class PU caster



超静聚氨脂轮
Super muting PU caster



超级聚氨脂轮
Super PU caster



高强度人造胶轮
High-strength artificial rubber caster



导电人造胶轮
Conductive artificial rubber caster



丝杆
Threaded stem



丝杆双刹
Threaded stem w/dual brake



丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No.			轮径 Wheel Dia (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	丝杆规格 Threaded stem size (mm)
	丝杆活动 Threaded stem	丝杆双刹 Threaded stem w/dual brake	丝杆边刹 Threaded stem w/side brake									
3"	ED02-11-075M-301	ED02-11-075MA-301	ED02-11-075MC-301	75	30	60	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	110	75	120	12X25
	ED02-11-075M-305	ED02-11-075MA-305	ED02-11-075MC-305			60	超静聚氨脂 Super muting polyurethane					
	ED02-11-075M-303	ED02-11-075MA-303	ED02-11-075MC-303			60	超级聚氨脂 Super polyurethane					
	ED02-11-075M-501	ED02-11-075MA-501	ED02-11-075MC-501			60	高强度人造胶 High-strength artificial rubber					
	ED02-11-075M-507	ED02-11-075MA-507	ED02-11-075MC-507			60	导电人造胶 Conductive artificial rubber					
4"	ED02-11-100M-301	ED02-11-100MA-301	ED02-11-100MC-301	100	30	80	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	137	88	120	12X25
	ED02-11-100M-305	ED02-11-100MA-305	ED02-11-100MC-305			80	超静聚氨脂 Super muting polyurethane					
	ED02-11-100M-303	ED02-11-100MA-303	ED02-11-100MC-303			80	超级聚氨脂 Super polyurethane					
	ED02-11-100M-501	ED02-11-100MA-501	ED02-11-100MC-501			80	高强度人造胶 High-strength artificial rubber					
	ED02-11-100M-507	ED02-11-100MA-507	ED02-11-100MC-507			80	导电人造胶 Conductive artificial rubber					
5"	ED02-11-125M-301	ED02-11-125MA-301	ED02-11-125MC-301	125	30	100	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	160	103	120	12X25
	ED02-11-125M-305	ED02-11-125MA-305	ED02-11-125MC-305			100	超静聚氨脂 Super muting polyurethane					
	ED02-11-125M-303	ED02-11-125MA-303	ED02-11-125MC-303			100	超级聚氨脂 Super polyurethane					
	ED02-11-125M-501	ED02-11-125MA-501	ED02-11-125MC-501			100	高强度人造胶 High-strength artificial rubber					
	ED02-11-125M-507	ED02-11-125MA-507	ED02-11-125MC-507			100	导电人造胶 Conductive artificial rubber					



高级聚氨脂轮
High-class PU caster



超静聚氨脂轮
Super muting PU caster



超级聚氨脂轮
Super PU caster



高强度人造胶轮
High-strength artificial rubber caster



导电人造胶轮
Conductive artificial rubber caster

ED2系列-空心钉型 ED2 Series-Bolt hole type



空心钉
Bolt hole



双刹空心钉
Bolt hole w/dual brake



边刹空心钉
Bolt hole w/side brake

规格 Size	编号 Code No.			轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	孔径 Hole Dia. (mm)
	空心钉 Bolt hole	双刹空心钉 Bolt hole w/dual brake	边刹空心钉 Bolt hole w/side brake									
3"	ED02-11-075PS-301	ED02-11-075PA-301	ED02-11-075PC-301	75	30	60	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	104	75	120	12
	ED02-11-075PS-305	ED02-11-075PA-305	ED02-11-075PC-305			60	超静聚氨脂 Super muting polyurethane					
	ED02-11-075PS-303	ED02-11-075PA-303	ED02-11-075PC-303			60	超级聚氨脂 Super polyurethane					
	ED02-11-075PS-501	ED02-11-075PA-501	ED02-11-075PC-501			60	高强度人造胶 High-strength artificial rubber					
	ED02-11-075PS-507	ED02-11-075PA-507	ED02-11-075PC-507			60	导电人造胶 Conductive artificial rubber					
4"	ED02-11-100PS-301	ED02-11-100PA-301	ED02-11-100PC-301	100	30	80	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	130	88	120	12
	ED02-11-100PS-305	ED02-11-100PA-305	ED02-11-100PC-305			80	超静聚氨脂 Super muting polyurethane					
	ED02-11-100PS-303	ED02-11-100PA-303	ED02-11-100PC-303			80	超级聚氨脂 Super polyurethane					
	ED02-11-100PS-501	ED02-11-100PA-501	ED02-11-100PC-501			80	高强度人造胶 High-strength artificial rubber					
	ED02-11-100PS-507	ED02-11-100PA-507	ED02-11-100PC-507			80	导电人造胶 Conductive artificial rubber					
5"	ED02-11-125PS-301	ED02-11-125PA-301	ED02-11-125PC-301	125	30	100	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	154	103	120	12
	ED02-11-125PS-305	ED02-11-125PA-305	ED02-11-125PC-305			100	超静聚氨脂 Super muting polyurethane					
	ED02-11-125PS-303	ED02-11-125PA-303	ED02-11-125PC-303			100	超级聚氨脂 Super polyurethane					
	ED02-11-125PS-501	ED02-11-125PA-501	ED02-11-125PC-501			100	高强度人造胶 High-strength artificial rubber					
	ED02-11-125PS-507	ED02-11-125PA-507	ED02-11-125PC-507			100	导电人造胶 Conductive artificial rubber					



高级聚氨脂轮
High-class PU caster



超静聚氨脂轮
Super muting PU caster



超级聚氨脂轮
Super PU caster



高强度人造胶轮
High-strength artificial rubber caster



导电人造胶轮
Conductive artificial rubber caster

ED3系列-平底型-活动式/固定式 ED3 Series-Top plate type-Swivel/Rigid



活动
Swivel



固定
Rigid



双刹活动
Swivel w/dual brake



边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	双刹活动 Swivel w/dual brake	边刹活动 Swivel w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
3"	ED03-51-075S-201	ED03-51-075R-201	ED03-51-075SA-201	ED03-51-075SC-201	75	28	60	PP Polypropylene	轴套 Bushing	107	75	120	94X67	73X45	9
	ED03-51-075S-301	ED03-51-075R-301	ED03-51-075SA-301	ED03-51-075SC-301			60	高级聚氨脂 High-class polyurethane							
	ED03-51-075S-305	ED03-51-075R-305	ED03-51-075SA-305	ED03-51-075SC-305			60	超静聚氨脂 Super muting polyurethane							
	ED03-51-075S-108	ED03-51-075R-108	ED03-51-075SA-108	ED03-51-075SC-108			60	耐高温 High-heat resistant							
	ED03-51-075S-701	ED03-51-075R-701	ED03-51-075SA-701	ED03-51-075SC-701			60	铸铁 Cast iron							
4"	ED03-51-100S-201	ED03-51-100R-201	ED03-51-100SA-201	ED03-51-100SC-201	100	28	80	PP Polypropylene	轴套 Bushing	133	88	120	94X67	73X45	9
	ED03-51-100S-301	ED03-51-100R-301	ED03-51-100SA-301	ED03-51-100SC-301			80	高级聚氨脂 High-class polyurethane							
	ED03-51-100S-305	ED03-51-100R-305	ED03-51-100SA-305	ED03-51-100SC-305			80	超静聚氨脂 Super muting polyurethane							
	ED03-51-100S-108	ED03-51-100R-108	ED03-51-100SA-108	ED03-51-100SC-108			80	耐高温 High-heat resistant							
	ED03-51-100S-701	ED03-51-100R-701	ED03-51-100SA-701	ED03-51-100SC-701			80	铸铁 Cast iron							
5"	ED03-51-125S-201	ED03-51-125R-201	ED03-51-125SA-201	ED03-51-125SC-201	125	28	100	PP Polypropylene	轴套 Bushing	158	103	120	94X67	73X45	9
	ED03-51-125S-301	ED03-51-125R-301	ED03-51-125SA-301	ED03-51-125SC-301			100	高级聚氨脂 High-class polyurethane							
	ED03-51-125S-305	ED03-51-125R-305	ED03-51-125SA-305	ED03-51-125SC-305			100	超静聚氨脂 Super muting polyurethane							
	ED03-51-125S-108	ED03-51-125R-108	ED03-51-125SA-108	ED03-51-125SC-108			100	耐高温 High-heat resistant							
	ED03-51-125S-701	ED03-51-125R-701	ED03-51-125SA-701	ED03-51-125SC-701			100	铸铁 Cast iron							

ED3系列-丝杆型 ED3 Series-Threaded stem type



丝杆
Threaded stem



丝杆双刹
Threaded stem w/dual brake



丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No.			轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	丝杆规格 Threaded stem size (mm)
	丝杆活动 Threaded stem	丝杆双刹 Threaded stem w/dual brake	丝杆边刹 Threaded stem w/side brake									
3"	ED03-51-075M-201	ED03-51-075MA-201	ED03-51-075MC-201	75	28	60	PP Polypropylene	轴套 Bushing	110	75	120	12X25
	ED03-51-075M-301	ED03-51-075MA-301	ED03-51-075MC-301			60	高级聚氨脂 High-class polyurethane					
	ED03-51-075M-305	ED03-51-075MA-305	ED03-51-075MC-305			60	超静聚氨脂 Super muting polyurethane					
	ED03-51-075M-108	ED03-51-075MA-108	ED03-51-075MC-108			60	耐高温 High-heat resistant					
	ED03-51-075M-701	ED03-51-075MA-701	ED03-51-075MC-701			60	铸铁 Cast iron					
4"	ED03-51-100M-201	ED03-51-100MA-201	ED03-51-100MC-201	100	28	80	PP Polypropylene	轴套 Bushing	137	88	120	12X25
	ED03-51-100M-301	ED03-51-100MA-301	ED03-51-100MC-301			80	高级聚氨脂 High-class polyurethane					
	ED03-51-100M-305	ED03-51-100MA-305	ED03-51-100MC-305			80	超静聚氨脂 Super muting polyurethane					
	ED03-51-100M-108	ED03-51-100MA-108	ED03-51-100MC-108			80	耐高温 High-heat resistant					
	ED03-51-100M-701	ED03-51-100MA-701	ED03-51-100MC-701			80	铸铁 Cast iron					
5"	ED03-51-125M-201	ED03-51-125MA-201	ED03-51-125MC-201	125	28	100	PP Polypropylene	轴套 Bushing	160	103	120	12X25
	ED03-51-125M-301	ED03-51-125MA-301	ED03-51-125MC-301			100	高级聚氨脂 High-class polyurethane					
	ED03-51-125M-305	ED03-51-125MA-305	ED03-51-125MC-305			100	超静聚氨脂 Super muting polyurethane					
	ED03-51-125M-108	ED03-51-125MA-108	ED03-51-125MC-108			100	耐高温 High-heat resistant					
	ED03-51-125M-701	ED03-51-125MA-701	ED03-51-125MC-701			100	铸铁 Cast iron					



空心钉
Bolt hole



双刹空心钉
Bolt hole w/dual brake



边刹空心钉
Bolt hole w/side brake

规格 Size	编号 Code No.			轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	孔径 Hole Dia. (mm)
	空心钉 Bolt hole	双刹空心钉 Bolt hole w/dual brake	边刹空心钉 Bolt hole w/side brake									
3"	ED03-51-075PS-201	ED03-51-075PA-201	ED03-51-075PC-201	75	28	60	PP Polypropylene	轴套 Bushing	104	75	120	12
	ED03-51-075PS-301	ED03-51-075PA-301	ED03-51-075PC-301			60	高级聚氨脂 High-class polyurethane					
	ED03-51-075PS-305	ED03-51-075PA-305	ED03-51-075PC-305			60	超静聚氨脂 Super muting polyurethane					
	ED03-51-075PS-108	ED03-51-075PA-108	ED03-51-075PC-108			60	耐高温 High-heat resistant					
	ED03-51-075PS-701	ED03-51-075PA-701	ED03-51-075PC-701			60	铸铁 Cast iron					
4"	ED03-51-100PS-201	ED03-51-100PA-201	ED03-51-100PC-201	100	28	80	PP Polypropylene	轴套 Bushing	130	88	120	12
	ED03-51-100PS-301	ED03-51-100PA-301	ED03-51-100PC-301			80	高级聚氨脂 High-class polyurethane					
	ED03-51-100PS-305	ED03-51-100PA-305	ED03-51-100PC-305			80	超静聚氨脂 Super muting polyurethane					
	ED03-51-100PS-108	ED03-51-100PA-108	ED03-51-100PC-108			80	耐高温 High-heat resistant					
	ED03-51-100PS-701	ED03-51-100PA-701	ED03-51-100PC-701			80	铸铁 Cast iron					
5"	ED03-51-125PS-201	ED03-51-125PA-201	ED03-51-125PC-201	125	28	100	PP Polypropylene	轴套 Bushing	154	103	120	12
	ED03-51-125PS-301	ED03-51-125PA-301	ED03-51-125PC-301			100	高级聚氨脂 High-class polyurethane					
	ED03-51-125PS-305	ED03-51-125PA-305	ED03-51-125PC-305			100	超静聚氨脂 Super muting polyurethane					
	ED03-51-125PS-108	ED03-51-125PA-108	ED03-51-125PC-108			100	耐高温 High-heat resistant					
	ED03-51-125PS-701	ED03-51-125PA-701	ED03-51-125PC-701			100	铸铁 Cast iron					

ED4系列-平底型-活动式/固定式 ED4 Series-Top plate type-Swivel/Rigid


活动
Swivel


固定
Rigid


边刹活动
Swivel w/side brake


活动
Swivel


固定
Rigid


边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	边刹活动 Swivel w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
2"	ED04-41-050S-201	ED04-41-050R-201	ED04-41-050SC-201	50	24	60	PP Polypropylene	轴套 Bushing	66	50	70X55	52X36	7
	ED04-41-050S-303	ED04-41-050R-303	ED04-41-050SC-303			60	超级聚氨脂 Super polyurethane						
2½"	ED04-41-065S-201	ED04-41-065R-201	ED04-41-065SC-201	65	28	80	PP Polypropylene	轴套 Bushing	86	62	94X67	73X45	9
	ED04-41-065S-303	ED04-41-065R-303	ED04-41-065SC-303			80	超级聚氨脂 Super polyurethane						

ED4系列-丝杆型 ED4 Series-Threaded stem type


丝杆活动
Threaded stem


丝杆边刹
Threaded stem w/side brake


丝杆活动
Threaded stem


丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No. 丝杆活动 Threaded stem	丝杆边刹 Threaded stem w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	丝杆规格 Threaded stem size (mm)
2"	ED04-41-050M-201	ED04-41-050MC-201	50	24	60	PP Polypropylene	轴套 Bushing	69	50	10X15
	ED04-41-050M-303	ED04-41-050MC-303			60	超级聚氨脂 Super polyurethane				
2½"	ED04-41-065M-201	ED04-41-065MC-201	65	28	80	PP Polypropylene	轴套 Bushing	89	62	12X25
	ED04-41-065M-303	ED04-41-065MC-303			80	超级聚氨脂 Super polyurethane				

EF1-17系列脚轮 EF1-17 series caster

環球脚輪
GLOBE CASTER

轮径 40-150mm Wheel diameter 40-150mm

承载 40-530kg Load capacity 40-530kg









超级聚氨脂轮 Super PU wheel | 尼龙轮 Nylon wheel | 高强度聚氨脂轮 High-strength PU wheel | 铁芯聚氨脂轮 Iron-core PU wheel | 导电橡胶轮 Conductive rubber wheel | 铸铁轮 Cast iron wheel | 耐高温轮 High-heat resistant wheel | 软橡胶轮 Soft rubber wheel | 低重心轮 Low center of gravity wheel



高级聚氨脂轮(圆边) High-class PU wheel(Round) | 超静聚氨脂轮(圆边) Super muting PU wheel(Round) | 导电人造胶轮(圆边) Conductive artificial rubber wheel(Round) | 高级聚氨脂轮(平边) High-class PU wheel(Flat) | 高强度人造胶轮(平边) High-strength artificial rubber wheel(Flat) | 导电人造胶轮(平边) Conductive artificial rubber wheel(Flat) | PP轮 Polypropylene wheel | 尼龙轮 Nylon wheel | 超级聚氨脂轮 Super PU wheel

EF1系列-平底型-活动式/固定式(镀锌) EF1 Series-Top plate type-Swivel/Rigid(Zinc-plating)



活动
Swivel



固定
Rigid



双刹活动
Swivel w/dual brake



边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	双刹活动 Swivel w/dual brake	边刹活动 Swivel w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
1½"	EF01-11-040S-210	EF01-11-040R-210	EF01-11-040SA-210	EF01-11-040SC-210	40	25	50	尼龙 Nylon	滚珠 Ball bearing	61	40	66	66X48	48X30	7
	EF01-11-040S-303	EF01-11-040R-303	EF01-11-040SA-303	EF01-11-040SC-303			50	超级聚氨脂 Super polyurethane							
	EF01-11-040S-307	EF01-11-040R-307	EF01-11-040SA-307	EF01-11-040SC-307			50	高强度聚氨脂 High-strength polyurethane							
	EF01-11-040S-702	EF01-11-040R-702					50	V型槽铸铁 V-groove cast iron							
2"	EF01-11-050S-210	EF01-11-050R-210	EF01-11-050SA-210	EF01-11-050SC-210	50	28	60	尼龙 Nylon	滚珠 Ball bearing	75	53	80	70X55	52X36	7
	EF01-11-050S-303	EF01-11-050R-303	EF01-11-050SA-303	EF01-11-050SC-303			60	超级聚氨脂 Super polyurethane							
	EF01-11-050S-307	EF01-11-050R-307	EF01-11-050SA-307	EF01-11-050SC-307			60	高强度聚氨脂 High-strength polyurethane							
	EF01-11-050S-702	EF01-11-050R-702					60	V型槽铸铁 V-groove cast iron							
2½"	EF01-11-065S-210	EF01-11-065R-210	EF01-11-065SA-210	EF01-11-065SC-210	65	32	80	尼龙 Nylon	滚珠 Ball bearing	95	69	113	94X67	73X45	9
	EF01-11-065S-303	EF01-11-065R-303	EF01-11-065SA-303	EF01-11-065SC-303			80	超级聚氨脂 Super polyurethane							
	EF01-11-065S-307	EF01-11-065R-307	EF01-11-065SA-307	EF01-11-065SC-307			80	高强度聚氨脂 High-strength polyurethane							
	EF01-11-065S-702	EF01-11-065R-702					80	V型槽铸铁 V-groove cast iron							
3"	EF01-11-075S-210	EF01-11-075R-210	EF01-11-075SA-210	EF01-11-075SC-210	75	32	100	尼龙 Nylon	滚珠 Ball bearing	107	74	115	94X67	73X45	9
	EF01-11-075S-303	EF01-11-075R-303	EF01-11-075SA-303	EF01-11-075SC-303			100	超级聚氨脂 Super polyurethane							
	EF01-11-075S-307	EF01-11-075R-307	EF01-11-075SA-307	EF01-11-075SC-307			100	高强度聚氨脂 High-strength polyurethane							
	EF01-11-075S-402	EF01-11-075R-402	EF01-11-075SA-402	EF01-11-075SC-402			100	铁芯聚氨酯 Iron core polyurethane							
	EF01-11-075S-702	EF01-11-075R-702					100	V型槽铸铁 V-groove cast iron							
3½"	EF01-11-090S-210	EF01-11-090R-210	EF01-11-090SA-210	EF01-11-090SC-210	90	32	110	尼龙 Nylon	滚珠 Ball bearing	120	81	120	94X67	73X45	9
	EF01-11-090S-303	EF01-11-090R-303	EF01-11-090SA-303	EF01-11-090SC-303			110	超级聚氨脂 Super polyurethane							
	EF01-11-090S-307	EF01-11-090R-307	EF01-11-090SA-307	EF01-11-090SC-307			110	高强度聚氨脂 High-strength polyurethane							
4"	EF01-11-100S-210	EF01-11-100R-210	EF01-11-100SA-210	EF01-11-100SC-210	100	32	130	尼龙 Nylon	滚珠 Ball bearing	130	86	120	94X67	73X45	9
	EF01-11-100S-303	EF01-11-100R-303	EF01-11-100SA-303	EF01-11-100SC-303			130	超级聚氨脂 Super polyurethane							
	EF01-11-100S-307	EF01-11-100R-307	EF01-11-100SA-307	EF01-11-100SC-307			130	高强度聚氨脂 High-strength polyurethane							
	EF01-11-100S-402	EF01-11-100R-402	EF01-11-100SA-402	EF01-11-100SC-402			130	铁芯聚氨酯 Iron core polyurethane							
	EF01-11-100S-702	EF01-11-100R-702					130	V型槽铸铁 V-groove cast iron							
5"	EF01-11-125S-210	EF01-11-125R-210	EF01-11-125SA-210	EF01-11-125SC-210	125	32	140	尼龙 Nylon	滚珠 Ball bearing	154	98	125	94X67	73X45	9
	EF01-11-125S-303	EF01-11-125R-303	EF01-11-125SA-303	EF01-11-125SC-303			140	超级聚氨脂 Super polyurethane							
	EF01-11-125S-307	EF01-11-125R-307	EF01-11-125SA-307	EF01-11-125SC-307			140	高强度聚氨脂 High-strength polyurethane							
	EF01-11-125S-402	EF01-11-125R-402	EF01-11-125SA-402	EF01-11-125SC-402			140	铁芯聚氨酯 Iron core polyurethane							
	EF01-11-125S-702	EF01-11-125R-702					140	V型槽铸铁 V-groove cast iron							



尼龙轮
Nylon caster



超级聚氨脂轮
Super PU caster



高强度聚氨脂轮
High-strength PU caster



铁芯聚氨脂轮
Iron core PU caster

EF1系列-丝杆型(镀锌) EF1 Series-Threaded stem type(Zinc-plating)



丝杆
Threaded stem



丝杆双刹
Threaded stem w/dual brake



丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No.			轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	丝杆规格 Threaded stem size (mm)
	丝杆活动 Threaded stem	丝杆双刹 Threaded stem w/dual brake	丝杆边刹 Threaded stem w/side brake									
1½"	EF01-11-040M-210	EF01-11-040MA-210	EF01-11-040MC-210	40	25	50	尼龙 Nylon	滚珠 Ball bearing	63	40	66	10X15
	EF01-11-040M-303	EF01-11-040MA-303	EF01-11-040MC-303			50	超级聚氨脂 Super polyurethane					
	EF01-11-040M-307	EF01-11-040MA-307	EF01-11-040MC-307			50	高强度聚氨脂 High-strength polyurethane					
2"	EF01-11-050M-210	EF01-11-050MA-210	EF01-11-050MC-210	50	28	60	尼龙 Nylon	滚珠 Ball bearing	80	53	80	12X20
	EF01-11-050M-303	EF01-11-050MA-303	EF01-11-050MC-303			60	超级聚氨脂 Super polyurethane					
	EF01-11-050M-307	EF01-11-050MA-307	EF01-11-050MC-307			60	高强度聚氨脂 High-strength polyurethane					
2½"	EF01-11-065M-210	EF01-11-065MA-210	EF01-11-065MC-210	65	32	80	尼龙 Nylon	滚珠 Ball bearing	97	69	113	12X25 (12X35)
	EF01-11-065M-303	EF01-11-065MA-303	EF01-11-065MC-303			80	超级聚氨脂 Super polyurethane					
	EF01-11-065M-307	EF01-11-065MA-307	EF01-11-065MC-307			80	高强度聚氨脂 High-strength polyurethane					
3"	EF01-11-075M-210	EF01-11-075MA-210	EF01-11-075MC-210	75	32	100	尼龙 Nylon	滚珠 Ball bearing	109	74	115	12X25 (12X35)
	EF01-11-075M-303	EF01-11-075MA-303	EF01-11-075MC-303			100	超级聚氨脂 Super polyurethane					
	EF01-11-075M-307	EF01-11-075MA-307	EF01-11-075MC-307			100	高强度聚氨脂 High-strength polyurethane					
	EF01-11-075M-402	EF01-11-075MA-402	EF01-11-075MC-402			100	铁芯聚氨酯 Iron core polyurethane					
3½"	EF01-11-090M-210	EF01-11-090MA-210	EF01-11-090MC-210	90	32	110	尼龙 Nylon	滚珠 Ball bearing	122	81	120	12X25 (12X35)
	EF01-11-090M-303	EF01-11-090MA-303	EF01-11-090MC-303			110	超级聚氨脂 Super polyurethane					
	EF01-11-090M-307	EF01-11-090MA-307	EF01-11-090MC-307			110	高强度聚氨脂 High-strength polyurethane					
4"	EF01-11-100M-210	EF01-11-100MA-210	EF01-11-100MC-210	100	32	130	尼龙 Nylon	滚珠 Ball bearing	132	86	120	12X25 (12X35)
	EF01-11-100M-303	EF01-11-100MA-303	EF01-11-100MC-303			130	超级聚氨脂 Super polyurethane					
	EF01-11-100M-307	EF01-11-100MA-307	EF01-11-100MC-307			130	高强度聚氨脂 High-strength polyurethane					
	EF01-11-100M-402	EF01-11-100MA-402	EF01-11-100MC-402			130	铁芯聚氨酯 Iron core polyurethane					
5"	EF01-11-125M-210	EF01-11-125MA-210	EF01-11-125MC-210	125	32	140	尼龙 Nylon	滚珠 Ball bearing	156	98	125	12X25 (12X35)
	EF01-11-125M-303	EF01-11-125MA-303	EF01-11-125MC-303			140	超级聚氨脂 Super polyurethane					
	EF01-11-125M-307	EF01-11-125MA-307	EF01-11-125MC-307			140	高强度聚氨脂 High-strength polyurethane					
	EF01-11-125M-402	EF01-11-125MA-402	EF01-11-125MC-402			140	铁芯聚氨酯 Iron core polyurethane					



尼龙轮
Nylon caster



超级聚氨脂轮
Super PU caster



高强度聚氨脂轮
High-strength PU caster



铁芯聚氨脂轮
Iron core PU caster

EF2系列-平底型-活动式/固定式(镀锌) EF2 Series-Top plate type-Swivel/Rigid(Zinc-plating)

環球脚輪 GLOBE CASTER



活动
Swivel



固定
Rigid



双刹活动
Swivel w/dual brake



边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	双刹活动 Swivel w/dual brake	边刹活动 Swivel w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
1½"	EF02-11-040S-502	EF02-11-040R-502	EF02-11-040SA-502	EF02-11-040SC-502	40	25	40	高强度人造胶 High-strength artificial rubber	滚珠 Ball bearing	61	40	66	66X48	48X30	7
	EF02-11-040S-508	EF02-11-040R-508	EF02-11-040SA-508	EF02-11-040SC-508			40	导电人造胶 Conductive artificial rubber							
	EF02-11-040S-108	EF02-11-040R-108	EF02-11-040SA-108	EF02-11-040SC-108			50	耐高温 High-heat resistant							
2"	EF02-11-050S-502	EF02-11-050R-502	EF02-11-050SA-502	EF02-11-050SC-502	50	28	50	高强度人造胶 High-strength artificial rubber	滚珠 Ball bearing	75	53	80	70X55	52X36	7
	EF02-11-050S-508	EF02-11-050R-508	EF02-11-050SA-508	EF02-11-050SC-508			50	导电人造胶 Conductive artificial rubber							
	EF02-11-050S-621	EF02-11-050R-621	EF02-11-050SA-621	EF02-11-050SC-621			50	导电橡胶 Conductive rubber							
	EF02-11-050S-108	EF02-11-050R-108	EF02-11-050SA-108	EF02-11-050SC-108			60	耐高温 High-heat resistant							
2½"	EF02-11-065S-502	EF02-11-065R-502	EF02-11-065SA-502	EF02-11-065SC-502	65	32	60	高强度人造胶 High-strength artificial rubber	滚珠 Ball bearing	95	69	113	94X67	73X45	9
	EF02-11-065S-508	EF02-11-065R-508	EF02-11-065SA-508	EF02-11-065SC-508			60	导电人造胶 Conductive artificial rubber							
	EF02-11-065S-108	EF02-11-065R-108	EF02-11-065SA-108	EF02-11-065SC-108			80	耐高温 High-heat resistant							
3"	EF02-11-075S-502	EF02-11-075R-502	EF02-11-075SA-502	EF02-11-075SC-502	75	32	80	高强度人造胶 High-strength artificial rubber	滚珠 Ball bearing	107	74	115	94X67	73X45	9
	EF02-11-075S-508	EF02-11-075R-508	EF02-11-075SA-508	EF02-11-075SC-508			80	导电人造胶 Conductive artificial rubber							
	EF02-11-075S-621	EF02-11-075R-621	EF02-11-075SA-621	EF02-11-075SC-621			80	导电橡胶 Conductive rubber							
	EF02-11-075S-108	EF02-11-075R-108	EF02-11-075SA-108	EF02-11-075SC-108			100	耐高温 High-heat resistant							
3½"	EF02-11-090S-502	EF02-11-090R-502	EF02-11-090SA-502	EF02-11-090SC-502	90	32	85	高强度人造胶 High-strength artificial rubber	滚珠 Ball bearing	120	81	120	94X67	73X45	9
	EF02-11-090S-508	EF02-11-090R-508	EF02-11-090SA-508	EF02-11-090SC-508			85	导电人造胶 Conductive artificial rubber							
	EF02-11-090S-108	EF02-11-090R-108	EF02-11-090SA-108	EF02-11-090SC-108			110	耐高温 High-heat resistant							
4"	EF02-11-100S-502	EF02-11-100R-502	EF02-11-100SA-502	EF02-11-100SC-502	100	32	90	高强度人造胶 High-strength artificial rubber	滚珠 Ball bearing	130	86	120	94X67	73X45	9
	EF02-11-100S-508	EF02-11-100R-508	EF02-11-100SA-508	EF02-11-100SC-508			90	导电人造胶 Conductive artificial rubber							
	EF02-11-100S-621	EF02-11-100R-621	EF02-11-100SA-621	EF02-11-100SC-621			90	导电橡胶 Conductive rubber							
	EF02-11-100S-108	EF02-11-100R-108	EF02-11-100SA-108	EF02-11-100SC-108			130	耐高温 High-heat resistant							
5"	EF02-11-125S-502	EF02-11-125R-502	EF02-11-125SA-502	EF02-11-125SC-502	125	32	100	高强度人造胶 High-strength artificial rubber	滚珠 Ball bearing	154	98	125	94X67	73X45	9
	EF02-11-125S-508	EF02-11-125R-508	EF02-11-125SA-508	EF02-11-125SC-508			100	导电人造胶 Conductive artificial rubber							
	EF02-11-125S-621	EF02-11-125R-621	EF02-11-125SA-621	EF02-11-125SC-621			100	导电橡胶 Conductive rubber							
	EF02-11-125S-108	EF02-11-125R-108	EF02-11-125SA-108	EF02-11-125SC-108			140	耐高温 High-heat resistant							

EF2系列-丝杆型(镀锌) EF2 Series-Threaded stem type(Zinc-plating)



丝杆
Threaded stem



丝杆双刹
Threaded stem w/dual brake



丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No.			轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	丝杆规格 Threaded stem size (mm)
	丝杆活动 Threaded stem	丝杆双刹 Threaded stem w/dual brake	丝杆边刹 Threaded stem w/side brake									
1½"	EF02-11-040M-502	EF02-11-040MA-502	EF02-11-040MC-502	40	25	40	高强度人造胶 High-strength artificial rubber	滚珠 Ball bearing	63	40	66	10X15
	EF02-11-040M-508	EF02-11-040MA-508	EF02-11-040MC-508			40	导电人造胶 Conductive artificial rubber					
	EF02-11-040M-108	EF02-11-040MA-108	EF02-11-040MC-108			50	耐高温 High-heat resistant					
2"	EF02-11-050M-502	EF02-11-050MA-502	EF02-11-050MC-502	50	28	50	高强度人造胶 High-strength artificial rubber	滚珠 Ball bearing	80	53	80	12X20
	EF02-11-050M-508	EF02-11-050MA-508	EF02-11-050MC-508			50	导电人造胶 Conductive artificial rubber					
	EF02-11-050M-621	EF02-11-050MA-621	EF02-11-050MC-621			50	导电橡胶 Conductive rubber					
	EF02-11-050M-108	EF02-11-050MA-108	EF02-11-050MC-108			60	耐高温 High-heat resistant					
2½"	EF02-11-065M-502	EF02-11-065MA-502	EF02-11-065MC-502	65	32	60	高强度人造胶 High-strength artificial rubber	滚珠 Ball bearing	97	69	113	12X25 (12X35)
	EF02-11-065M-508	EF02-11-065MA-508	EF02-11-065MC-508			60	导电人造胶 Conductive artificial rubber					
	EF02-11-065M-108	EF02-11-065MA-108	EF02-11-065MC-108			80	耐高温 High-heat resistant					
3"	EF02-11-075M-502	EF02-11-075MA-502	EF02-11-075MC-502	75	32	80	高强度人造胶 High-strength artificial rubber	滚珠 Ball bearing	109	74	115	12X25 (12X35)
	EF02-11-075M-508	EF02-11-075MA-508	EF02-11-075MC-508			80	导电人造胶 Conductive artificial rubber					
	EF02-11-075M-621	EF02-11-075MA-621	EF02-11-075MC-621			80	导电橡胶 Conductive rubber					
	EF02-11-075M-108	EF02-11-075MA-108	EF02-11-075MC-108			100	耐高温 High-heat resistant					
3½"	EF02-11-090M-502	EF02-11-090MA-502	EF02-11-090MC-502	90	32	85	高强度人造胶 High-strength artificial rubber	滚珠 Ball bearing	122	81	120	12X25 (12X35)
	EF02-11-090M-508	EF02-11-090MA-508	EF02-11-090MC-508			85	导电人造胶 Conductive artificial rubber					
	EF02-11-090M-108	EF02-11-090MA-108	EF02-11-090MC-108			110	耐高温 High-heat resistant					
4"	EF02-11-100M-502	EF02-11-100MA-502	EF02-11-100MC-502	100	32	90	高强度人造胶 High-strength artificial rubber	滚珠 Ball bearing	132	86	120	12X25 (12X35)
	EF02-11-100M-508	EF02-11-100MA-508	EF02-11-100MC-508			90	导电人造胶 Conductive artificial rubber					
	EF02-11-100M-621	EF02-11-100MA-621	EF02-11-100MC-621			90	导电橡胶 Conductive rubber					
	EF02-11-100M-108	EF02-11-100MA-108	EF02-11-100MC-108			130	耐高温 High-heat resistant					
5"	EF02-11-125M-502	EF02-11-125MA-502	EF02-11-125MC-502	125	32	100	高强度人造胶 High-strength artificial rubber	滚珠 Ball bearing	156	98	125	12X25 (12X35)
	EF02-11-125M-508	EF02-11-125MA-508	EF02-11-125MC-508			100	导电人造胶 Conductive artificial rubber					
	EF02-11-125M-621	EF02-11-125MA-621	EF02-11-125MC-621			100	导电橡胶 Conductive rubber					
	EF02-11-125M-108	EF02-11-125MA-108	EF02-11-125MC-108			140	耐高温 High-heat resistant					



不锈钢活动
Stainless steel swivel



不锈钢固定
Stainless steel rigid



不锈钢双刹活动
Stainless steel dual brake

规格 Size	编号 Code No.				轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
	活动 Swivel	固定 Rigid	双刹活动 Swivel w/dual brake	边刹活动 Swivel w/side brake											
1½"	EF03-16-040S-210	EF03-16-040R-210	EF03-16-040SA-210	EF03-16-040SC-210	40	25	50	尼龙 Nylon	滚珠 Ball bearing	61	40	66	66X48	48X30	7
	EF03-16-040S-303	EF03-16-040R-303	EF03-16-040SA-303	EF03-16-040SC-303			50	超级聚氨脂 Super polyurethane							
	EF03-16-040S-502	EF03-16-040R-502	EF03-16-040SA-502	EF03-16-040SC-502			40	高强度人造胶 High-strength artificial rubber							
2"	EF03-16-050S-210	EF03-16-050R-210	EF03-16-050SA-210	EF03-16-050SC-210	50	28	60	尼龙 Nylon	滚珠 Ball bearing	75	53	80	70X55	52X36	7
	EF03-16-050S-303	EF03-16-050R-303	EF03-16-050SA-303	EF03-16-050SC-303			60	超级聚氨脂 Super polyurethane							
	EF03-16-050S-502	EF03-16-050R-502	EF03-16-050SA-502	EF03-16-050SC-502			50	高强度人造胶 High-strength artificial rubber							
2½"	EF03-16-065S-210	EF03-16-065R-210	EF03-16-065SA-210	EF03-16-065SC-210	65	32	80	尼龙 Nylon	滚珠 Ball bearing	95	69	113	94X67	73X45	9
	EF03-16-065S-303	EF03-16-065R-303	EF03-16-065SA-303	EF03-16-065SC-303			80	超级聚氨脂 Super polyurethane							
	EF03-16-065S-502	EF03-16-065R-502	EF03-16-065SA-502	EF03-16-065SC-502			60	高强度人造胶 High-strength artificial rubber							
3"	EF03-16-075S-210	EF03-16-075R-210	EF03-16-075SA-210	EF03-16-075SC-210	75	32	100	尼龙 Nylon	滚珠 Ball bearing	107	74	115	94X67	73X45	9
	EF03-16-075S-303	EF03-16-075R-303	EF03-16-075SA-303	EF03-16-075SC-303			100	超级聚氨脂 Super polyurethane							
	EF03-16-075S-502	EF03-16-075R-502	EF03-16-075SA-502	EF03-16-075SC-502			80	高强度人造胶 High-strength artificial rubber							
3½"	EF03-16-090S-210	EF03-16-090R-210	EF03-16-090SA-210	EF03-16-090SC-210	90	32	110	尼龙 Nylon	滚珠 Ball bearing	120	81	120	94X67	73X45	9
	EF03-16-090S-303	EF03-16-090R-303	EF03-16-090SA-303	EF03-16-090SC-303			110	超级聚氨脂 Super polyurethane							
	EF03-16-090S-502	EF03-16-090R-502	EF03-16-090SA-502	EF03-16-090SC-502			85	高强度人造胶 High-strength artificial rubber							
4"	EF03-16-100S-210	EF03-16-100R-210	EF03-16-100SA-210	EF03-16-100SC-210	100	32	130	尼龙 Nylon	滚珠 Ball bearing	130	86	120	94X67	73X45	9
	EF03-16-100S-303	EF03-16-100R-303	EF03-16-100SA-303	EF03-16-100SC-303			130	超级聚氨脂 Super polyurethane							
	EF03-16-100S-502	EF03-16-100R-502	EF03-16-100SA-502	EF03-16-100SC-502			90	高强度人造胶 High-strength artificial rubber							
5"	EF03-16-125S-210	EF03-16-125R-210	EF03-16-125SA-210	EF03-16-125SC-210	125	32	140	尼龙 Nylon	滚珠 Ball bearing	154	98	125	94X67	73X45	9
	EF03-16-125S-303	EF03-16-125R-303	EF03-16-125SA-303	EF03-16-125SC-303			140	超级聚氨脂 Super polyurethane							
	EF03-16-125S-502	EF03-16-125R-502	EF03-16-125SA-502	EF03-16-125SC-502			100	高强度人造胶 High-strength artificial rubber							



尼龙轮(不锈钢)
Nylon caster(Stainless steel)



超级聚氨脂轮(不锈钢)
Super PU caster(Stainless steel)



不锈钢空心钉
Stainless steel bolt hole



不锈钢空心钉双刹
Stainless steel bolt hole w/dual brake

规格 Size	编号 Code No.			轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	孔径 Hole Dia. (mm)
	空心钉 Bolt hole	双刹空心钉 Bolt hole w/dual brake	边刹空心钉 Bolt hole w/side brake									
1½"	EF03-16-040PS-210	EF03-16-040PA-210	EF03-16-040PC-210	40	25	50	尼龙 Nylon	滚珠 Ball bearing	60	40	66	10
	EF03-16-040PS-303	EF03-16-040PA-303	EF03-16-040PC-303			50	超级聚氨脂 Super polyurethane					
	EF03-16-040PS-502	EF03-16-040PA-502	EF03-16-040PC-502			40	高强度人造胶 High-strength artificial rubber					
2"	EF03-16-050PS-210	EF03-16-050PA-210	EF03-16-050PC-210	50	28	60	尼龙 Nylon	滚珠 Ball bearing	74	53	80	12
	EF03-16-050PS-303	EF03-16-050PA-303	EF03-16-050PC-303			60	超级聚氨脂 Super polyurethane					
	EF03-16-050PS-502	EF03-16-050PA-502	EF03-16-050PC-502			50	高强度人造胶 High-strength artificial rubber					
2½"	EF03-16-065PS-210	EF03-16-065PA-210	EF03-16-065PC-210	65	32	80	尼龙 Nylon	滚珠 Ball bearing	92	69	113	12
	EF03-16-065PS-303	EF03-16-065PA-303	EF03-16-065PC-303			80	超级聚氨脂 Super polyurethane					
	EF03-16-065PS-502	EF03-16-065PA-502	EF03-16-065PC-502			60	高强度人造胶 High-strength artificial rubber					
3"	EF03-16-075PS-210	EF03-16-075PA-210	EF03-16-075PC-210	75	32	100	尼龙 Nylon	滚珠 Ball bearing	102	74	115	12
	EF03-16-075PS-303	EF03-16-075PA-303	EF03-16-075PC-303			100	超级聚氨脂 Super polyurethane					
	EF03-16-075PS-502	EF03-16-075PA-502	EF03-16-075PC-502			80	高强度人造胶 High-strength artificial rubber					
3½"	EF03-16-090PS-210	EF03-16-090PA-210	EF03-16-090PC-210	90	32	110	尼龙 Nylon	滚珠 Ball bearing	117	81	120	12
	EF03-16-090PS-303	EF03-16-090PA-303	EF03-16-090PC-303			110	超级聚氨脂 Super polyurethane					
	EF03-16-090PS-502	EF03-16-090PA-502	EF03-16-090PC-502			85	高强度人造胶 High-strength artificial rubber					
4"	EF03-16-100PS-210	EF03-16-100PA-210	EF03-16-100PC-210	100	32	130	尼龙 Nylon	滚珠 Ball bearing	127	86	120	12
	EF03-16-100PS-303	EF03-16-100PA-303	EF03-16-100PC-303			130	超级聚氨脂 Super polyurethane					
	EF03-16-100PS-502	EF03-16-100PA-502	EF03-16-100PC-502			90	高强度人造胶 High-strength artificial rubber					
5"	EF03-16-125PS-210	EF03-16-125PA-210	EF03-16-125PC-210	125	32	140	尼龙 Nylon	滚珠 Ball bearing	151	98	125	12
	EF03-16-125PS-303	EF03-16-125PA-303	EF03-16-125PC-303			140	超级聚氨脂 Super polyurethane					
	EF03-16-125PS-502	EF03-16-125PA-502	EF03-16-125PC-502			100	高强度人造胶 High-strength artificial rubber					



尼龙轮(不锈钢)
Nylon caster(Stainless steel)



超级聚氨脂轮(不锈钢)
Super PU caster(Stainless steel)


活动
Swivel


固定
Rigid


双刹活动
Swivel w/dual brake


边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	双刹活动 Swivel w/dual brake	边刹活动 Swivel w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
1½"	EF04-61-040S-210	EF04-61-040R-210	EF04-61-040SA-210	EF04-61-040SC-210	40	25	50	尼龙 Nylon	特尔灵 Derlin bearing	61	40	66	66X48	48X30	7
	EF04-61-040S-303	EF04-61-040R-303	EF04-61-040SA-303	EF04-61-040SC-303			50	超级聚氨酯 Super polyurethane							
	EF04-61-040S-502	EF04-61-040R-502	EF04-61-040SA-502	EF04-61-040SC-502			40	高强度人造胶 High-strength artificial rubber							
2"	EF04-61-050S-210	EF04-61-050R-210	EF04-61-050SA-210	EF04-61-050SC-210	50	28	60	尼龙 Nylon	特尔灵 Derlin bearing	75	53	80	70X55	52X36	7
	EF04-61-050S-303	EF04-61-050R-303	EF04-61-050SA-303	EF04-61-050SC-303			60	超级聚氨酯 Super polyurethane							
	EF04-61-050S-502	EF04-61-050R-502	EF04-61-050SA-502	EF04-61-050SC-502			50	高强度人造胶 High-strength artificial rubber							
2½"	EF04-61-065S-210	EF04-61-065R-210	EF04-61-065SA-210	EF04-61-065SC-210	65	32	80	尼龙 Nylon	特尔灵 Derlin bearing	95	69	113	94X67	73X45	9
	EF04-61-065S-303	EF04-61-065R-303	EF04-61-065SA-303	EF04-61-065SC-303			80	超级聚氨酯 Super polyurethane							
	EF04-61-065S-502	EF04-61-065R-502	EF04-61-065SA-502	EF04-61-065SC-502			60	高强度人造胶 High-strength artificial rubber							
3"	EF04-61-075S-210	EF04-61-075R-210	EF04-61-075SA-210	EF04-61-075SC-210	75	32	100	尼龙 Nylon	特尔灵 Derlin bearing	107	74	115	94X67	73X45	9
	EF04-61-075S-303	EF04-61-075R-303	EF04-61-075SA-303	EF04-61-075SC-303			100	超级聚氨酯 Super polyurethane							
	EF04-61-075S-502	EF04-61-075R-502	EF04-61-075SA-502	EF04-61-075SC-502			80	高强度人造胶 High-strength artificial rubber							
3½"	EF04-61-090S-210	EF04-61-090R-210	EF04-61-090SA-210	EF04-61-090SC-210	90	32	110	尼龙 Nylon	特尔灵 Derlin bearing	120	81	120	94X67	73X45	9
	EF04-61-090S-303	EF04-61-090R-303	EF04-61-090SA-303	EF04-61-090SC-303			110	超级聚氨酯 Super polyurethane							
	EF04-61-090S-502	EF04-61-090R-502	EF04-61-090SA-502	EF04-61-090SC-502			85	高强度人造胶 High-strength artificial rubber							
4"	EF04-61-100S-210	EF04-61-100R-210	EF04-61-100SA-210	EF04-61-100SC-210	100	32	130	尼龙 Nylon	特尔灵 Derlin bearing	130	86	120	94X67	73X45	9
	EF04-61-100S-303	EF04-61-100R-303	EF04-61-100SA-303	EF04-61-100SC-303			130	超级聚氨酯 Super polyurethane							
	EF04-61-100S-502	EF04-61-100R-502	EF04-61-100SA-502	EF04-61-100SC-502			90	高强度人造胶 High-strength artificial rubber							
5"	EF04-61-125S-210	EF04-61-125R-210	EF04-61-125SA-210	EF04-61-125SC-210	125	32	140	尼龙 Nylon	特尔灵 Derlin bearing	154	98	125	94X67	73X45	9
	EF04-61-125S-303	EF04-61-125R-303	EF04-61-125SA-303	EF04-61-125SC-303			140	超级聚氨酯 Super polyurethane							
	EF04-61-125S-502	EF04-61-125R-502	EF04-61-125SA-502	EF04-61-125SC-502			100	高强度人造胶 High-strength artificial rubber							


尼龙轮
Nylon caster


超级聚氨脂轮
Super PU caster



丝杆
Threaded stem



丝杆双刹
Threaded stem w/dual brake



丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No.			轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	丝杆规格 Threaded stem size (mm)
	丝杆活动 Threaded stem	丝杆双刹 Threaded stem w/dual brake	丝杆边刹 Threaded stem w/side brake									
1½"	EF04-61-040M-210	EF04-61-040MA-210	EF04-61-040MC-210	40	25	50	尼龙 Nylon	特尔灵 Derlin bearing	63	40	66	10X15
	EF04-61-040M-303	EF04-61-040MA-303	EF04-61-040MC-303			50	超级聚氨脂 Super polyurethane					
	EF04-61-040M-502	EF04-61-040MA-502	EF04-61-040MC-502			40	高强度人造胶 High-strength artificial rubber					
2"	EF04-61-050M-210	EF04-61-050MA-210	EF04-61-050MC-210	50	28	60	尼龙 Nylon	特尔灵 Derlin bearing	80	53	80	12X20
	EF04-61-050M-303	EF04-61-050MA-303	EF04-61-050MC-303			60	超级聚氨脂 Super polyurethane					
	EF04-61-050M-502	EF04-61-050MA-502	EF04-61-050MC-502			50	高强度人造胶 High-strength artificial rubber					
2½"	EF04-61-065M-210	EF04-61-065MA-210	EF04-61-065MC-210	65	32	80	尼龙 Nylon	特尔灵 Derlin bearing	97	69	113	12X25 (12X35)
	EF04-61-065M-303	EF04-61-065MA-303	EF04-61-065MC-303			80	超级聚氨脂 Super polyurethane					
	EF04-61-065M-502	EF04-61-065MA-502	EF04-61-065MC-502			60	高强度人造胶 High-strength artificial rubber					
3"	EF04-61-075M-210	EF04-61-075MA-210	EF04-61-075MC-210	75	32	100	尼龙 Nylon	特尔灵 Derlin bearing	109	74	115	12X25 (12X35)
	EF04-61-075M-303	EF04-61-075MA-303	EF04-61-075MC-303			100	超级聚氨脂 Super polyurethane					
	EF04-61-075M-502	EF04-61-075MA-502	EF04-61-075MC-502			80	高强度人造胶 High-strength artificial rubber					
3½"	EF04-61-090M-210	EF04-61-090MA-210	EF04-61-090MC-210	90	32	110	尼龙 Nylon	特尔灵 Derlin bearing	122	81	120	12X25 (12X35)
	EF04-61-090M-303	EF04-61-090MA-303	EF04-61-090MC-303			110	超级聚氨脂 Super polyurethane					
	EF04-61-090M-502	EF04-61-090MA-502	EF04-61-090MC-502			85	高强度人造胶 High-strength artificial rubber					
4"	EF04-61-100M-210	EF04-61-100MA-210	EF04-61-100MC-210	100	32	130	尼龙 Nylon	特尔灵 Derlin bearing	132	86	120	12X25 (12X35)
	EF04-61-100M-303	EF04-61-100MA-303	EF04-61-100MC-303			130	超级聚氨脂 Super polyurethane					
	EF04-61-100M-502	EF04-61-100MA-502	EF04-61-100MC-502			90	高强度人造胶 High-strength artificial rubber					
5"	EF04-61-125M-210	EF04-61-125MA-210	EF04-61-125MC-210	125	32	140	尼龙 Nylon	特尔灵 Derlin bearing	156	98	125	12X25 (12X35)
	EF04-61-125M-303	EF04-61-125MA-303	EF04-61-125MC-303			140	超级聚氨脂 Super polyurethane					
	EF04-61-125M-502	EF04-61-125MA-502	EF04-61-125MC-502			100	高强度人造胶 High-strength artificial rubber					



尼龙轮
Nylon caster



超级聚氨脂轮
Super PU caster



活动
Swivel



固定
Rigid



双刹活动
Swivel w/dual brake



边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	双刹活动 Swivel w/dual brake	边刹活动 Swivel w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
1½"	EF04-51-040S-602	EF04-51-040R-602	EF04-51-040SA-602	EF04-51-040SC-602	40	25	40	软橡胶 Soft rubber	轴套 Bushing	61	40	66	66X48	48X30	7
	EF04-51-040S-108	EF04-51-040R-108	EF04-51-040SA-108	EF04-51-040SC-108			50	耐高温 High-heat resistant							
	EF04-51-040S-701	EF04-51-040R-701	EF04-51-040SA-701	EF04-51-040SC-701			50	铸铁 Cast iron							
2"	EF04-51-050S-602	EF04-51-050R-602	EF04-51-050SA-602	EF04-51-050SC-602	50	28	50	软橡胶 Soft rubber	轴套 Bushing	75	53	80	70X55	52X36	7
	EF04-51-050S-108	EF04-51-050R-108	EF04-51-050SA-108	EF04-51-050SC-108			60	耐高温 High-heat resistant							
	EF04-51-050S-701	EF04-51-050R-701	EF04-51-050SA-701	EF04-51-050SC-701			60	铸铁 Cast iron							
2½"	EF04-51-065S-602	EF04-51-065R-602	EF04-51-065SA-602	EF04-51-065SC-602	65	32	65	软橡胶 Soft rubber	轴套 Bushing	95	69	113	94X67	73X45	9
	EF04-51-065S-108	EF04-51-065R-108	EF04-51-065SA-108	EF04-51-065SC-108			80	耐高温 High-heat resistant							
	EF04-51-065S-701	EF04-51-065R-701	EF04-51-065SA-701	EF04-51-065SC-701			80	铸铁 Cast iron							
3"	EF04-51-075S-602	EF04-51-075R-602	EF04-51-075SA-602	EF04-51-075SC-602	75	32	90	软橡胶 Soft rubber	轴套 Bushing	107	74	115	94X67	73X45	9
	EF04-51-075S-108	EF04-51-075R-108	EF04-51-075SA-108	EF04-51-075SC-108			100	耐高温 High-heat resistant							
	EF04-51-075S-701	EF04-51-075R-701	EF04-51-075SA-701	EF04-51-075SC-701			100	铸铁 Cast iron							
3½"	EF04-51-090S-602	EF04-51-090R-602	EF04-51-090SA-602	EF04-51-090SC-602	90	32	95	软橡胶 Soft rubber	轴套 Bushing	120	81	120	94X67	73X45	9
	EF04-51-090S-108	EF04-51-090R-108	EF04-51-090SA-108	EF04-51-090SC-108			110	耐高温 High-heat resistant							
	EF04-51-090S-701	EF04-51-090R-701	EF04-51-090SA-701	EF04-51-090SC-701			110	铸铁 Cast iron							
4"	EF04-51-100S-602	EF04-51-100R-602	EF04-51-100SA-602	EF04-51-100SC-602	100	32	100	软橡胶 Soft rubber	轴套 Bushing	130	86	120	94X67	73X45	9
	EF04-51-100S-108	EF04-51-100R-108	EF04-51-100SA-108	EF04-51-100SC-108			130	耐高温 High-heat resistant							
	EF04-51-100S-701	EF04-51-100R-701	EF04-51-100SA-701	EF04-51-100SC-701			130	铸铁 Cast iron							
5"	EF04-51-125S-602	EF04-51-125R-602	EF04-51-125SA-602	EF04-51-125SC-602	125	32	105	软橡胶 Soft rubber	轴套 Bushing	154	98	125	94X67	73X45	9
	EF04-51-125S-108	EF04-51-125R-108	EF04-51-125SA-108	EF04-51-125SC-108			140	耐高温 High-heat resistant							
	EF04-51-125S-701	EF04-51-125R-701	EF04-51-125SA-701	EF04-51-125SC-701			140	铸铁 Cast iron							



软橡胶轮
Soft rubber caster



耐高温轮
High-heat resistant caster



铸铁轮
Cast iron caster

EF4系列-丝杆型(镀锌) EF4 Series-Threaded stem type(Zinc-plating)



丝杆
Threaded stem



丝杆双刹
Threaded stem w/dual brake



丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No. 丝杆活动 Threaded stem	丝杆双刹 Threaded stem w/dual brake	丝杆边刹 Threaded stem w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	丝杆规格 Threaded stem size (mm)
1½"	EF04-51-040M-602	EF04-51-040MA-602	EF04-51-040MC-602	40	25	40	软橡胶 Soft rubber	轴套 Bushing	63	40	66	10X15
	EF04-51-040M-108	EF04-51-040MA-108	EF04-51-040MC-108			50	耐高温 High-heat resistant					
	EF04-51-040M-701	EF04-51-040MA-701	EF04-51-040MC-701			50	铸铁 Cast iron					
2"	EF04-51-050M-602	EF04-51-050MA-602	EF04-51-050MC-602	50	28	50	软橡胶 Soft rubber	轴套 Bushing	80	53	80	12X20
	EF04-51-050M-108	EF04-51-050MA-108	EF04-51-050MC-108			60	耐高温 High-heat resistant					
	EF04-51-050M-701	EF04-51-050MA-701	EF04-51-050MC-701			60	铸铁 Cast iron					
2½"	EF04-51-065M-602	EF04-51-065MA-602	EF04-51-065MC-602	65	32	65	软橡胶 Soft rubber	轴套 Bushing	97	69	113	12X25 (12X35)
	EF04-51-065M-108	EF04-51-065MA-108	EF04-51-065MC-108			80	耐高温 High-heat resistant					
	EF04-51-065M-701	EF04-51-065MA-701	EF04-51-065MC-701			80	铸铁 Cast iron					
3"	EF04-51-075M-602	EF04-51-075MA-602	EF04-51-075MC-602	75	32	90	软橡胶 Soft rubber	轴套 Bushing	109	74	115	12X25 (12X35)
	EF04-51-075M-108	EF04-51-075MA-108	EF04-51-075MC-108			100	耐高温 High-heat resistant					
	EF04-51-075M-701	EF04-51-075MA-701	EF04-51-075MC-701			100	铸铁 Cast iron					
3½"	EF04-51-090M-602	EF04-51-090MA-602	EF04-51-090MC-602	90	32	95	软橡胶 Soft rubber	轴套 Bushing	122	81	120	12X25 (12X35)
	EF04-51-090M-108	EF04-51-090MA-108	EF04-51-090MC-108			110	耐高温 High-heat resistant					
	EF04-51-090M-701	EF04-51-090MA-701	EF04-51-090MC-701			110	铸铁 Cast iron					
4"	EF04-51-100M-602	EF04-51-100MA-602	EF04-51-100MC-602	100	32	100	软橡胶 Soft rubber	轴套 Bushing	132	86	120	12X25 (12X35)
	EF04-51-100M-108	EF04-51-100MA-108	EF04-51-100MC-108			130	耐高温 High-heat resistant					
	EF04-51-100M-701	EF04-51-100MA-701	EF04-51-100MC-701			130	铸铁 Cast iron					
5"	EF04-51-125M-602	EF04-51-125MA-602	EF04-51-125MC-602	125	32	105	软橡胶 Soft rubber	轴套 Bushing	156	98	125	12X25 (12X35)
	EF04-51-125M-108	EF04-51-125MA-108	EF04-51-125MC-108			140	耐高温 High-heat resistant					
	EF04-51-125M-701	EF04-51-125MA-701	EF04-51-125MC-701			140	铸铁 Cast iron					



软橡胶轮
Soft rubber caster



耐高温轮
High-heat resistant caster



铸铁轮
Cast iron caster



不锈钢活动
Stainless steel swivel



不锈钢固定
Stainless steel rigid



不锈钢双刹活动
Stainless steel dual brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	双刹活动 Swivel w/dual brake	边刹活动 Swivel w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
1½"	EF05-66-040S-210	EF05-66-040R-210	EF05-66-040SA-210	EF05-66-040SC-210	40	25	50	尼龙 Nylon	特尔灵 Derlin bearing	61	40	66	66X48	48X30	7
	EF05-66-040S-303	EF05-66-040R-303	EF05-66-040SA-303	EF05-66-040SC-303			50	超级聚氨脂 Super polyurethane							
	EF05-66-040S-502	EF05-66-040R-502	EF05-66-040SA-502	EF05-66-040SC-502			40	高强度人造胶 High-strength artificial rubber							
2"	EF05-66-050S-210	EF05-66-050R-210	EF05-66-050SA-210	EF05-66-050SC-210	50	28	60	尼龙 Nylon	特尔灵 Derlin bearing	75	53	80	70X55	52X36	7
	EF05-66-050S-303	EF05-66-050R-303	EF05-66-050SA-303	EF05-66-050SC-303			60	超级聚氨脂 Super polyurethane							
	EF05-66-050S-502	EF05-66-050R-502	EF05-66-050SA-502	EF05-66-050SC-502			50	高强度人造胶 High-strength artificial rubber							
2½"	EF05-66-065S-210	EF05-66-065R-210	EF05-66-065SA-210	EF05-66-065SC-210	65	32	80	尼龙 Nylon	特尔灵 Derlin bearing	95	69	113	94X67	73X45	9
	EF05-66-065S-303	EF05-66-065R-303	EF05-66-065SA-303	EF05-66-065SC-303			80	超级聚氨脂 Super polyurethane							
	EF05-66-065S-502	EF05-66-065R-502	EF05-66-065SA-502	EF05-66-065SC-502			60	高强度人造胶 High-strength artificial rubber							
3"	EF05-66-075S-210	EF05-66-075R-210	EF05-66-075SA-210	EF05-66-075SC-210	75	32	100	尼龙 Nylon	特尔灵 Derlin bearing	107	74	115	94X67	73X45	9
	EF05-66-075S-303	EF05-66-075R-303	EF05-66-075SA-303	EF05-66-075SC-303			100	超级聚氨脂 Super polyurethane							
	EF05-66-075S-502	EF05-66-075R-502	EF05-66-075SA-502	EF05-66-075SC-502			80	高强度人造胶 High-strength artificial rubber							
3½"	EF05-66-090S-210	EF05-66-090R-210	EF05-66-090SA-210	EF05-66-090SC-210	90	32	110	尼龙 Nylon	特尔灵 Derlin bearing	120	81	120	94X67	73X45	9
	EF05-66-090S-303	EF05-66-090R-303	EF05-66-090SA-303	EF05-66-090SC-303			110	超级聚氨脂 Super polyurethane							
	EF05-66-090S-502	EF05-66-090R-502	EF05-66-090SA-502	EF05-66-090SC-502			85	高强度人造胶 High-strength artificial rubber							
4"	EF05-66-100S-210	EF05-66-100R-210	EF05-66-100SA-210	EF05-66-100SC-210	100	32	130	尼龙 Nylon	特尔灵 Derlin bearing	130	86	120	94X67	73X45	9
	EF05-66-100S-303	EF05-66-100R-303	EF05-66-100SA-303	EF05-66-100SC-303			130	超级聚氨脂 Super polyurethane							
	EF05-66-100S-502	EF05-66-100R-502	EF05-66-100SA-502	EF05-66-100SC-502			90	高强度人造胶 High-strength artificial rubber							
5"	EF05-66-125S-210	EF05-66-125R-210	EF05-66-125SA-210	EF05-66-125SC-210	125	32	140	尼龙 Nylon	特尔灵 Derlin bearing	154	98	125	94X67	73X45	9
	EF05-66-125S-303	EF05-66-125R-303	EF05-66-125SA-303	EF05-66-125SC-303			140	超级聚氨脂 Super polyurethane							
	EF05-66-125S-502	EF05-66-125R-502	EF05-66-125SA-502	EF05-66-125SC-502			100	高强度人造胶 High-strength artificial rubber							



尼龙轮(不锈钢)
Nylon caster(Stainless steel)



超级聚氨脂轮(不锈钢)
Super PU caster(Stainless steel)



不锈钢空心钉
Stainless steel bolt hole



不锈钢空心钉双刹
Stainless steel bolt hole w/dual brake

规格 Size	编号 Code No.			轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	孔径 Hole Dia. (mm)
	空心钉 Bolt hole	双刹空心钉 Bolt hole w/dual brake	边刹空心钉 Bolt hole w/side brake									
1½"	EF05-66-040PS-210	EF05-66-040PA-210	EF05-66-040PC-210	40	25	50	尼龙 Nylon	特尔灵 Derlin bearing	60	40	66	10
	EF05-66-040PS-303	EF05-66-040PA-303	EF05-66-040PC-303			50	超级聚氨脂 Super polyurethane					
	EF05-66-040PS-502	EF05-66-040PA-502	EF05-66-040PC-502			40	高强度人造胶 High-strength artificial rubber					
2"	EF05-66-050PS-210	EF05-66-050PA-210	EF05-66-050PC-210	50	28	60	尼龙 Nylon	特尔灵 Derlin bearing	74	53	80	12
	EF05-66-050PS-303	EF05-66-050PA-303	EF05-66-050PC-303			60	超级聚氨脂 Super polyurethane					
	EF05-66-050PS-502	EF05-66-050PA-502	EF05-66-050PC-502			50	高强度人造胶 High-strength artificial rubber					
2½"	EF05-66-065PS-210	EF05-66-065PA-210	EF05-66-065PC-210	65	32	80	尼龙 Nylon	特尔灵 Derlin bearing	92	69	113	12
	EF05-66-065PS-303	EF05-66-065PA-303	EF05-66-065PC-303			80	超级聚氨脂 Super polyurethane					
	EF05-66-065PS-502	EF05-66-065PA-502	EF05-66-065PC-502			60	高强度人造胶 High-strength artificial rubber					
3"	EF05-66-075PS-210	EF05-66-075PA-210	EF05-66-075PC-210	75	32	100	尼龙 Nylon	特尔灵 Derlin bearing	102	74	115	12
	EF05-66-075PS-303	EF05-66-075PA-303	EF05-66-075PC-303			100	超级聚氨脂 Super polyurethane					
	EF05-66-075PS-502	EF05-66-075PA-502	EF05-66-075PC-502			80	高强度人造胶 High-strength artificial rubber					
3½"	EF05-66-090PS-210	EF05-66-090PA-210	EF05-66-090PC-210	90	32	110	尼龙 Nylon	特尔灵 Derlin bearing	117	81	120	12
	EF05-66-090PS-303	EF05-66-090PA-303	EF05-66-090PC-303			110	超级聚氨脂 Super polyurethane					
	EF05-66-090PS-502	EF05-66-090PA-502	EF05-66-090PC-502			85	高强度人造胶 High-strength artificial rubber					
4"	EF05-66-100PS-210	EF05-66-100PA-210	EF05-66-100PC-210	100	32	130	尼龙 Nylon	特尔灵 Derlin bearing	127	86	120	12
	EF05-66-100PS-303	EF05-66-100PA-303	EF05-66-100PC-303			130	超级聚氨脂 Super polyurethane					
	EF05-66-100PS-502	EF05-66-100PA-502	EF05-66-100PC-502			90	高强度人造胶 High-strength artificial rubber					
5"	EF05-66-125PS-210	EF05-66-125PA-210	EF05-66-125PC-210	125	32	140	尼龙 Nylon	特尔灵 Derlin bearing	151	98	125	12
	EF05-66-125PS-303	EF05-66-125PA-303	EF05-66-125PC-303			140	超级聚氨脂 Super polyurethane					
	EF05-66-125PS-502	EF05-66-125PA-502	EF05-66-125PC-502			100	高强度人造胶 High-strength artificial rubber					



尼龙轮(不锈钢)
Nylon caster(Stainless steel)



超级聚氨脂轮(不锈钢)
Super PU caster(Stainless steel)



活动
Swivel



固定
Rigid



双刹活动
Swivel w/dual brake



边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	双刹活动 Swivel w/dual brake	边刹活动 Swivel w/side brake	轮径 Wheel Dia (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
3"	EF06-11-075S-301	EF06-11-075R-301	EF06-11-075SA-301	EF06-11-075SC-301	75	32	100	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	107	74	115	94X67	73X45	9
	EF06-11-075S-305	EF06-11-075R-305	EF06-11-075SA-305	EF06-11-075SC-305			80	超静聚氨脂 Super muting polyurethane							
	EF06-11-075S-501	EF06-11-075R-501	EF06-11-075SA-501	EF06-11-075SC-501			80	高强度人造胶 High-strength artificial rubber							
	EF06-11-075S-507	EF06-11-075R-507	EF06-11-075SA-507	EF06-11-075SC-507			80	导电人造胶 Conductive artificial rubber							
3½"	EF06-11-090S-301	EF06-11-090R-301	EF06-11-090SA-301	EF06-11-090SC-301	90	32	110	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	120	81	120	94X67	73X45	9
	EF06-11-090S-305	EF06-11-090R-305	EF06-11-090SA-305	EF06-11-090SC-305			85	超静聚氨脂 Super muting polyurethane							
	EF06-11-090S-501	EF06-11-090R-501	EF06-11-090SA-501	EF06-11-090SC-501			85	高强度人造胶 High-strength artificial rubber							
	EF06-11-090S-507	EF06-11-090R-507	EF06-11-090SA-507	EF06-11-090SC-507			85	导电人造胶 Conductive artificial rubber							
4"	EF06-11-100S-301	EF06-11-100R-301	EF06-11-100SA-301	EF06-11-100SC-301	100	32	130	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	130	86	120	94X67	73X45	9
	EF06-11-100S-305	EF06-11-100R-305	EF06-11-100SA-305	EF06-11-100SC-305			90	超静聚氨脂 Super muting polyurethane							
	EF06-11-100S-501	EF06-11-100R-501	EF06-11-100SA-501	EF06-11-100SC-501			90	高强度人造胶 High-strength artificial rubber							
	EF06-11-100S-507	EF06-11-100R-507	EF06-11-100SA-507	EF06-11-100SC-507			90	导电人造胶 Conductive artificial rubber							
5"	EF06-11-125S-301	EF06-11-125R-301	EF06-11-125SA-301	EF06-11-125SC-301	125	32	140	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	154	98	125	94X67	73X45	9
	EF06-11-125S-305	EF06-11-125R-305	EF06-11-125SA-305	EF06-11-125SC-305			100	超静聚氨脂 Super muting polyurethane							
	EF06-11-125S-501	EF06-11-125R-501	EF06-11-125SA-501	EF06-11-125SC-501			100	高强度人造胶 High-strength artificial rubber							
	EF06-11-125S-507	EF06-11-125R-507	EF06-11-125SA-507	EF06-11-125SC-507			100	导电人造胶 Conductive artificial rubber							
6"	EF06-11-150S-301	EF06-11-150R-301	EF06-11-150SA-301	EF06-11-150SC-301	150	32	160	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing						
	EF06-11-150S-305	EF06-11-150R-305	EF06-11-150SA-305	EF06-11-150SC-305			120	超静聚氨脂 Super muting polyurethane							
	EF06-11-150S-501	EF06-11-150R-501	EF06-11-150SA-501	EF06-11-150SC-501			120	高强度人造胶 High-strength artificial rubber							



高级聚氨脂轮
High-class PU caster



超静聚氨脂轮
Super muting PU caster



高强度人造胶轮
High-strength artificial rubber caster



导电人造胶轮
Conductive artificial rubber caster

EF6系列-丝杆型(圆边)(镀锌) EF6 Series-Threaded stem type(Round)(Zinc-plating)



丝杆
Threaded stem



丝杆双刹
Threaded stem w/dual brake



丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No.			轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	丝杆规格 Threaded stem size (mm)
	丝杆活动 Threaded stem	丝杆双刹 Threaded stem w/dual brake	丝杆边刹 Threaded stem w/side brake									
3"	EF06-11-075M-301	EF06-11-075MA-301	EF06-11-075MC-301	75	32	100	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	109	74	115	12X25 (12X35)
	EF06-11-075M-305	EF06-11-075MA-305	EF06-11-075MC-305			80	超静聚氨脂 Super muting polyurethane					
	EF06-11-075M-501	EF06-11-075MA-501	EF06-11-075MC-501			80	高强度人造胶 High-strength artificial rubber					
	EF06-11-075M-507	EF06-11-075MA-507	EF06-11-075MC-507			80	导电人造胶 Conductive artificial rubber					
3½"	EF06-11-090M-301	EF06-11-090MA-301	EF06-11-090MC-301	90	32	110	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	122	81	120	12X25 (12X35)
	EF06-11-090M-305	EF06-11-090MA-305	EF06-11-090MC-305			85	超静聚氨脂 Super muting polyurethane					
	EF06-11-090M-501	EF06-11-090MA-501	EF06-11-090MC-501			85	高强度人造胶 High-strength artificial rubber					
	EF06-11-090M-507	EF06-11-090MA-507	EF06-11-090MC-507			85	导电人造胶 Conductive artificial rubber					
4"	EF06-11-100M-301	EF06-11-100MA-301	EF06-11-100MC-301	100	32	130	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	132	86	120	12X25 (12X35)
	EF06-11-100M-305	EF06-11-100MA-305	EF06-11-100MC-305			90	超静聚氨脂 Super muting polyurethane					
	EF06-11-100M-501	EF06-11-100MA-501	EF06-11-100MC-501			90	高强度人造胶 High-strength artificial rubber					
	EF06-11-100M-507	EF06-11-100MA-507	EF06-11-100MC-507			90	导电人造胶 Conductive artificial rubber					
5"	EF06-11-125M-301	EF06-11-125MA-301	EF06-11-125MC-301	125	32	140	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	156	98	125	12X25 (12X35)
	EF06-11-125M-305	EF06-11-125MA-305	EF06-11-125MC-305			100	超静聚氨脂 Super muting polyurethane					
	EF06-11-125M-501	EF06-11-125MA-501	EF06-11-125MC-501			100	高强度人造胶 High-strength artificial rubber					
	EF06-11-125M-507	EF06-11-125MA-507	EF06-11-125MC-507			100	导电人造胶 Conductive artificial rubber					
6"	EF06-11-150M-301	EF06-11-150MA-301	EF06-11-150MC-301	150	32	160	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing				
	EF06-11-150M-305	EF06-11-150MA-305	EF06-11-150MC-305			120	超静聚氨脂 Super muting polyurethane					
	EF06-11-150M-501	EF06-11-150MA-501	EF06-11-150MC-501			120	高强度人造胶 High-strength artificial rubber					



高级聚氨脂轮
High-class PU caster



超静聚氨脂轮
Super muting PU caster



高强度人造胶轮
High-strength artificial rubber caster



导电人造胶轮
Conductive artificial rubber caster


活动
Swivel


固定
Rigid


双刹活动
Swivel w/dual brake


边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	双刹活动 Swivel w/dual brake	边刹活动 Swivel w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
3"	EF07-11-075S-302	EF07-11-075R-302	EF07-11-075SA-302	EF07-11-075SC-302	75	32	100	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	107	74	115	94X67	73X45	9
	EF07-11-075S-306	EF07-11-075R-306	EF07-11-075SA-306	EF07-11-075SC-306			80	超静聚氨脂 Super muting polyurethane							
	EF07-11-075S-502	EF07-11-075R-502	EF07-11-075SA-502	EF07-11-075SC-502			80	高强度人造胶 High-strength artificial rubber							
	EF07-11-075S-508	EF07-11-075R-508	EF07-11-075SA-508	EF07-11-075SC-508			80	导电人造胶 Conductive artificial rubber							
3½"	EF07-11-090S-302	EF07-11-090R-302	EF07-11-090SA-302	EF07-11-090SC-302	90	32	110	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	120	81	120	94X67	73X45	9
	EF07-11-090S-306	EF07-11-090R-306	EF07-11-090SA-306	EF07-11-090SC-306			85	超静聚氨脂 Super muting polyurethane							
	EF07-11-090S-502	EF07-11-090R-502	EF07-11-090SA-502	EF07-11-090SC-502			85	高强度人造胶 High-strength artificial rubber							
	EF07-11-090S-508	EF07-11-090R-508	EF07-11-090SA-508	EF07-11-090SC-508			85	导电人造胶 Conductive artificial rubber							
4"	EF07-11-100S-302	EF07-11-100R-302	EF07-11-100SA-302	EF07-11-100SC-302	100	32	130	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	130	86	120	94X67	73X45	9
	EF07-11-100S-306	EF07-11-100R-306	EF07-11-100SA-306	EF07-11-100SC-306			90	超静聚氨脂 Super muting polyurethane							
	EF07-11-100S-502	EF07-11-100R-502	EF07-11-100SA-502	EF07-11-100SC-502			90	高强度人造胶 High-strength artificial rubber							
	EF07-11-100S-508	EF07-11-100R-508	EF07-11-100SA-508	EF07-11-100SC-508			90	导电人造胶 Conductive artificial rubber							
5"	EF07-11-125S-302	EF07-11-125R-302	EF07-11-125SA-302	EF07-11-125SC-302	125	32	140	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	154	98	125	94X67	73X45	9
	EF07-11-125S-306	EF07-11-125R-306	EF07-11-125SA-306	EF07-11-125SC-306			100	超静聚氨脂 Super muting polyurethane							
	EF07-11-125S-502	EF07-11-125R-502	EF07-11-125SA-502	EF07-11-125SC-502			100	高强度人造胶 High-strength artificial rubber							
	EF07-11-125S-508	EF07-11-125R-508	EF07-11-125SA-508	EF07-11-125SC-508			100	导电人造胶 Conductive artificial rubber							
6"	EF07-11-150S-302	EF07-11-150R-302	EF07-11-150SA-302	EF07-11-150SC-302	150	32	160	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing						
	EF07-11-150S-306	EF07-11-150R-306	EF07-11-150SA-306	EF07-11-150SC-306			120	超静聚氨脂 Super muting polyurethane							
	EF07-11-150S-502	EF07-11-150R-502	EF07-11-150SA-502	EF07-11-150SC-502			120	高强度人造胶 High-strength artificial rubber							


高级聚氨脂轮
High-class PU caster


超静聚氨脂轮
Super muting PU caster


高强度人造胶轮
High-strength artificial rubber caster


导电人造胶轮
Conductive artificial rubber caster

EF7系列-丝杆型(平边)(镀锌) EF7 Series-Threaded stem type(Flat)(Zinc-plating)



丝杆
Threaded stem



丝杆双刹
Threaded stem w/dual brake



丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No. 丝杆活动 Threaded stem	丝杆双刹 Threaded stem w/dual brake	丝杆边刹 Threaded stem w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	丝杆规格 Threaded stem size (mm)
3"	EF07-11-075M-302	EF07-11-075MA-302	EF07-11-075MC-302	75	32	100	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	109	74	115	12X25 (12X35)
	EF07-11-075M-306	EF07-11-075MA-306	EF07-11-075MC-306			80	超静聚氨脂 Super muting polyurethane					
	EF07-11-075M-502	EF07-11-075MA-502	EF07-11-075MC-502			80	高强度人造胶 High-strength artificial rubber					
	EF07-11-075M-508	EF07-11-075MA-508	EF07-11-075MC-508			80	导电人造胶 Conductive artificial rubber					
3½"	EF07-11-090M-302	EF07-11-090MA-302	EF07-11-090MC-302	90	32	110	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	122	81	120	12X25 (12X35)
	EF07-11-090M-306	EF07-11-090MA-306	EF07-11-090MC-306			85	超静聚氨脂 Super muting polyurethane					
	EF07-11-090M-502	EF07-11-090MA-502	EF07-11-090MC-502			85	高强度人造胶 High-strength artificial rubber					
	EF07-11-090M-508	EF07-11-090MA-508	EF07-11-090MC-508			85	导电人造胶 Conductive artificial rubber					
4"	EF07-11-100M-302	EF07-11-100MA-302	EF07-11-100MC-302	100	32	130	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	132	86	120	12X25 (12X35)
	EF07-11-100M-306	EF07-11-100MA-306	EF07-11-100MC-306			90	超静聚氨脂 Super muting polyurethane					
	EF07-11-100M-502	EF07-11-100MA-502	EF07-11-100MC-502			90	高强度人造胶 High-strength artificial rubber					
	EF07-11-100M-508	EF07-11-100MA-508	EF07-11-100MC-508			90	导电人造胶 Conductive artificial rubber					
5"	EF07-11-125M-302	EF07-11-125MA-302	EF07-11-125MC-302	125	32	140	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	156	98	125	12X25 (12X35)
	EF07-11-125M-306	EF07-11-125MA-306	EF07-11-125MC-306			100	超静聚氨脂 Super muting polyurethane					
	EF07-11-125M-502	EF07-11-125MA-502	EF07-11-125MC-502			100	高强度人造胶 High-strength artificial rubber					
	EF07-11-125M-508	EF07-11-125MA-508	EF07-11-125MC-508			100	导电人造胶 Conductive artificial rubber					
6"	EF07-11-150M-302	EF07-11-150MA-302	EF07-11-150MC-302	150	32	160	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing				
	EF07-11-150M-306	EF07-11-150MA-306	EF07-11-150MC-306			120	超静聚氨脂 Super muting polyurethane					
	EF07-11-150M-502	EF07-11-150MA-502	EF07-11-150MC-502			120	高强度人造胶 High-strength artificial rubber					



高级聚氨脂轮
High-class PU caster



超静聚氨脂轮
Super muting PU caster



高强度人造胶轮
High-strength artificial rubber caster



导电人造胶轮
Conductive artificial rubber caster



活动
Swivel



固定
Rigid



双刹活动
Swivel w/dual brake



边刹活动
Swivel w/side brake

规格 Size	编号 Code No.				轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
	活动 Swivel	固定 Rigid	双刹活动 Swivel w/dual brake	边刹活动 Swivel w/side brake											
3"	EF08-14-075S-301	EF08-14-075R-301	EF08-14-075SA-301	EF08-14-075SC-301	75	32	100	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	107	74	115	94X67	73X45	9
	EF08-14-075S-305	EF08-14-075R-305	EF08-14-075SA-305	EF08-14-075SC-305			80	超静聚氨脂 Super muting polyurethane							
	EF08-14-075S-501	EF08-14-075R-501	EF08-14-075SA-501	EF08-14-075SC-501			80	高强度人造胶 High-strength artificial rubber							
3½"	EF08-14-090S-301	EF08-14-090R-301	EF08-14-090SA-301	EF08-14-090SC-301	90	32	110	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	120	81	120	94X67	73X45	9
	EF08-14-090S-305	EF08-14-090R-305	EF08-14-090SA-305	EF08-14-090SC-305			85	超静聚氨脂 Super muting polyurethane							
	EF08-14-090S-501	EF08-14-090R-501	EF08-14-090SA-501	EF08-14-090SC-501			85	高强度人造胶 High-strength artificial rubber							
4"	EF08-14-100S-301	EF08-14-100R-301	EF08-14-100SA-301	EF08-14-100SC-301	100	32	130	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	130	86	120	94X67	73X45	9
	EF08-14-100S-305	EF08-14-100R-305	EF08-14-100SA-305	EF08-14-100SC-305			90	超静聚氨脂 Super muting polyurethane							
	EF08-14-100S-501	EF08-14-100R-501	EF08-14-100SA-501	EF08-14-100SC-501			90	高强度人造胶 High-strength artificial rubber							
5"	EF08-14-125S-301	EF08-14-125R-301	EF08-14-125SA-301	EF08-14-125SC-301	125	32	140	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	154	98	125	94X67	73X45	9
	EF08-14-125S-305	EF08-14-125R-305	EF08-14-125SA-305	EF08-14-125SC-305			100	超静聚氨脂 Super muting polyurethane							
	EF08-14-125S-501	EF08-14-125R-501	EF08-14-125SA-501	EF08-14-125SC-501			100	高强度人造胶 High-strength artificial rubber							



高级聚氨脂轮(镀铬)
High-class PU caster(Chrome-plating)



超静聚氨脂轮(镀铬)
Super muting PU caster(Chrome-plating)



高强度人造胶轮(镀铬)
High-strength artificial rubber caster(Chrome-plating)



丝杆
Threaded stem



丝杆双刹
Threaded stem w/dual brake



丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No. 丝杆活动 Threaded stem	丝杆双刹 Threaded stem w/dual brake	丝杆边刹 Threaded stem w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	丝杆规格 Threaded stem size (mm)
3"	EF08-14-075M-301	EF08-14-075MA-301	EF08-14-075MC-301	75	32	100	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	109	74	115	12X25 (12X35)
	EF08-14-075M-305	EF08-14-075MA-305	EF08-14-075MC-305			80	超静聚氨脂 Super muting polyurethane					
	EF08-14-075M-501	EF08-14-075MA-501	EF08-14-075MC-501			80	高强度人造胶 High-strength artificial rubber					
3 1/2"	EF08-14-090M-301	EF08-14-090MA-301	EF08-14-090MC-301	90	32	110	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	122	81	120	12X25 (12X35)
	EF08-14-090M-305	EF08-14-090MA-305	EF08-14-090MC-305			85	超静聚氨脂 Super muting polyurethane					
	EF08-14-090M-501	EF08-14-090MA-501	EF08-14-090MC-501			85	高强度人造胶 High-strength artificial rubber					
4"	EF08-14-100M-301	EF08-14-100MA-301	EF08-14-100MC-301	100	32	130	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	132	86	120	12X25 (12X35)
	EF08-14-100M-305	EF08-14-100MA-305	EF08-14-100MC-305			90	超静聚氨脂 Super muting polyurethane					
	EF08-14-100M-501	EF08-14-100MA-501	EF08-14-100MC-501			90	高强度人造胶 High-strength artificial rubber					
5"	EF08-14-125M-301	EF08-14-125MA-301	EF08-14-125MC-301	125	32	140	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	156	98	125	12X25 (12X35)
	EF08-14-125M-305	EF08-14-125MA-305	EF08-14-125MC-305			100	超静聚氨脂 Super muting polyurethane					
	EF08-14-125M-501	EF08-14-125MA-501	EF08-14-125MC-501			100	高强度人造胶 High-strength artificial rubber					



高级聚氨脂轮(镀铬)
High-class PU caster(Chrome-plating)



超静聚氨脂轮(镀铬)
Super muting PU caster(Chrome-plating)



高强度人造胶轮(镀铬)
High-strength artificial rubber caster(Chrome-plating)



活动
Swivel



固定
Rigid



双刹活动
Swivel w/dual brake



边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	双刹活动 Swivel w/dual brake	边刹活动 Swivel w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
3"	EF09-14-075S-302	EF09-14-075R-302	EF09-14-075SA-302	EF09-14-075SC-302	75	32	100	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	107	74	115	94X67	73X45	9
	EF09-14-075S-306	EF09-14-075R-306	EF09-14-075SA-306	EF09-14-075SC-306			80	超静聚氨脂 Super muting polyurethane							
	EF09-14-075S-502	EF09-14-075R-502	EF09-14-075SA-502	EF09-14-075SC-502			80	高强度人造胶 High-strength artificial rubber							
3½"	EF09-14-090S-302	EF09-14-090R-302	EF09-14-090SA-302	EF09-14-090SC-302	90	32	110	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	120	81	120	94X67	73X45	9
	EF09-14-090S-306	EF09-14-090R-306	EF09-14-090SA-306	EF09-14-090SC-306			85	超静聚氨脂 Super muting polyurethane							
	EF09-14-090S-502	EF09-14-090R-502	EF09-14-090SA-502	EF09-14-090SC-502			85	高强度人造胶 High-strength artificial rubber							
4"	EF09-14-100S-302	EF09-14-100R-302	EF09-14-100SA-302	EF09-14-100SC-302	100	32	130	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	130	86	120	94X67	73X45	9
	EF09-14-100S-306	EF09-14-100R-306	EF09-14-100SA-306	EF09-14-100SC-306			90	超静聚氨脂 Super muting polyurethane							
	EF09-14-100S-502	EF09-14-100R-502	EF09-14-100SA-502	EF09-14-100SC-502			90	高强度人造胶 High-strength artificial rubber							
5"	EF09-14-125S-302	EF09-14-125R-302	EF09-14-125SA-302	EF09-14-125SC-302	125	32	140	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	154	98	125	94X67	73X45	9
	EF09-14-125S-306	EF09-14-125R-306	EF09-14-125SA-306	EF09-14-125SC-306			100	超静聚氨脂 Super muting polyurethane							
	EF09-14-125S-502	EF09-14-125R-502	EF09-14-125SA-502	EF09-14-125SC-502			100	高强度人造胶 High-strength artificial rubber							



高级聚氨脂轮(镀铬)
High-class PU caster(Chrome-plating)



超静聚氨脂轮(镀铬)
Super muting PU caster(Chrome-plating)



高强度人造胶轮(镀铬)
High-strength artificial rubber caster(Chrome-plating)



丝杆
Threaded stem



丝杆双刹
Threaded stem w/dual brake



丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No.			轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	丝杆规格 Threaded stem size (mm)
	丝杆活动 Threaded stem	丝杆双刹 Threaded stem w/dual brake	丝杆边刹 Threaded stem w/side brake									
3"	EF09-14-075M-302	EF09-14-075MA-302	EF09-14-075MC-302	75	32	100	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	109	74	115	12X25 (12X35)
	EF09-14-075M-306	EF09-14-075MA-306	EF09-14-075MC-306			80	超静聚氨脂 Super muting polyurethane					
	EF09-14-075M-502	EF09-14-075MA-502	EF09-14-075MC-502			80	高强度人造胶 High-strength artificial rubber					
3½"	EF09-14-090M-302	EF09-14-090MA-302	EF09-14-090MC-302	90	32	110	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	122	81	120	12X25 (12X35)
	EF09-14-090M-306	EF09-14-090MA-306	EF09-14-090MC-306			85	超静聚氨脂 Super muting polyurethane					
	EF09-14-090M-502	EF09-14-090MA-502	EF09-14-090MC-502			85	高强度人造胶 High-strength artificial rubber					
4"	EF09-14-100M-302	EF09-14-100MA-302	EF09-14-100MC-302	100	32	130	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	132	86	120	12X25 (12X35)
	EF09-14-100M-306	EF09-14-100MA-306	EF09-14-100MC-306			90	超静聚氨脂 Super muting polyurethane					
	EF09-14-100M-502	EF09-14-100MA-502	EF09-14-100MC-502			90	高强度人造胶 High-strength artificial rubber					
5"	EF09-14-125M-302	EF09-14-125MA-302	EF09-14-125MC-302	125	32	140	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	156	98	125	12X25 (12X35)
	EF09-14-125M-306	EF09-14-125MA-306	EF09-14-125MC-306			100	超静聚氨脂 Super muting polyurethane					
	EF09-14-125M-502	EF09-14-125MA-502	EF09-14-125MC-502			100	高强度人造胶 High-strength artificial rubber					



高级聚氨脂轮(镀铬)
High-class PU caster(Chrome-plating)



超静聚氨脂轮(镀铬)
Super muting PU caster(Chrome-plating)



高强度人造胶轮(镀铬)
High-strength artificial rubber caster(Chrome-plating)

EF12系列-平底型-低重心轮(镀锌) EF12 Series-Top plate type-Low centre of gravity caster(Zinc-plating)



活动
Swivel



固定
Rigid



边刹活动
Swivel w/side brake

规格 Size	编号 Code No.			轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
	活动 Swivel	固定 Rigid	边刹活动 Swivel w/side brake										
1½"	EF12-51-040S-101	EF12-51-040R-101	EF12-51-040SC-101	40	25	50	低重心高级尼龙 Low centre of gravity high-class nylon	轴套 Bushing	61	40	66X48	48X30	7
2"	EF12-51-050S-101	EF12-51-050R-101	EF12-51-050SC-101	50	28	100	低重心高级尼龙 Low centre of gravity high-class nylon	轴套 Bushing	75	53	70X55	52X36	7
2½"	EF12-11-065S-101	EF12-11-065R-101	EF12-11-065SC-101	65	40	150	低重心高级尼龙 Low centre of gravity high-class nylon	滚珠 Ball bearing	94	57	94X67	73X45	9
3"	EF12-11-075S-101	EF12-11-075R-101	EF12-11-075SC-101	75	45	200	低重心高级尼龙 Low centre of gravity high-class nylon	滚珠 Ball bearing	105	62	105X80	81X59	9

EF12系列-丝杆型-低重心轮(镀锌) EF12 Series-Threaded stem type--Low centre of gravity caster(Zinc-plating)



丝杆
Threaded stem



丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No.		轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	丝杆规格 Threaded stem size (mm)
	丝杆活动 Threaded stem	丝杆边刹 Threaded stem w/side brake								
1½"	EF12-51-040M-101	EF12-51-040MC-101	40	25	50	低重心高级尼龙 Low centre of gravity high-class nylon	轴套 Bushing	63	40	10X15
2"	EF12-51-050M-101	EF12-51-050MC-101	50	28	100	低重心高级尼龙 Low centre of gravity high-class nylon	轴套 Bushing	80	53	12X20
2½"	EF12-11-065M-101	EF12-11-065MC-101	65	40	150	低重心高级尼龙 Low centre of gravity high-class nylon	滚珠 Ball bearing	97	57	12X25
3"	EF12-11-075M-101	EF12-11-075MC-101	75	45	200	低重心高级尼龙 Low centre of gravity high-class nylon	滚珠 Ball bearing	108	62	12X25

EF14系列-菱形底板-活动机场轮(镀彩锌) EF14 Series-Diamond plate-Swivel airport Caster(Colored-plating)



活动
Swivel



带防撞架活动
Swivel w/anti-collision frame

规格 Size	编号 Code No.		轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
	活动 Swivel	带防撞架活动 Swivel w/anti-collision frame										
58mm	EF14-12-058S-103	EF14-12-058VS-103	58	35	200	高强度尼龙 High-strength nylon	滚珠 Ball bearing	96	54	111	89	12
70mm	EF14-12-070S-103	EF14-12-070VS-103	70	35	200	高强度尼龙 High-strength nylon	滚珠 Ball bearing	102	60	111	89	12

EF15系列-方形底板-活动机场轮(镀彩锌) EF15 Series-Square plate-Swivel airport Caster(Colored-plating)



活动
Swivel



带防撞架活动
Swivel w/anti-collision frame

规格 Size	编号 Code No.		轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
	活动 Swivel	带防撞架活动 Swivel w/anti-collision frame										
58mm	EF15-12-058S-103	EF15-12-058VS-103	58	35	200	高强度尼龙 High-strength nylon	滚珠 Ball bearing	96	54	114X80	86X61	8
70mm	EF15-12-070S-103	EF15-12-070VS-103	70	35	200	高强度尼龙 High-strength nylon	滚珠 Ball bearing	102	60	114X80	86X61	8

EF17系列-平底型-肥仔轮(镀锌) EF17 Series-Top plate type-Fat Caster(Zinc-plating)



活动
Swivel



固定
Rigid



边刹活动
Swivel w/side brake

规格 Size	编号 Code No.			轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	活动底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)	固定底板 Top plate size (mm)	固定孔距 Hole spacing (mm)
	活动 Swivel	固定 Rigid	边刹活动 Swivel w/side brake												
1½"	EF17-41-040S-201	EF17-41-040R-201		40	24	40	PP Polypropylene	光身 Nude	51	34	61X44	48X23	6.5	61X38	48X23
	EF17-41-040S-210	EF17-41-040R-210				40	尼龙 Nylon								
	EF17-41-040S-303	EF17-41-040R-303				40	超级聚氨脂 Super polyurethane								
	EF17-41-040S-601	EF17-41-040R-601				35	橡胶 Rubber								
2"	EF17-41-050S-201	EF17-41-050R-201	EF17-41-050SC-201	50	24	53	PP Polypropylene	光身 Nude	65	39	66X48	54X24	6.5	66X44	54X24
	EF17-41-050S-210	EF17-41-050R-210	EF17-41-050SC-210			53	尼龙 Nylon								
	EF17-41-050S-303	EF17-41-050R-303	EF17-41-050SC-303			53	超级聚氨脂 Super polyurethane								
	EF17-41-050S-601	EF17-41-050R-601	EF17-41-050SC-601			42	橡胶 Rubber								
2½"	EF17-41-065S-201	EF17-41-065R-201	EF17-41-065SC-201	65	28	60	PP Polypropylene	光身 Nude	85	55	98X70	76X44	9	98X54	81X25
	EF17-41-065S-210	EF17-41-065R-210	EF17-41-065SC-210			60	尼龙 Nylon								
	EF17-41-065S-303	EF17-41-065R-303	EF17-41-065SC-303			60	超级聚氨脂 Super polyurethane								
	EF17-41-065S-601	EF17-41-065R-601	EF17-41-065SC-601			50	橡胶 Rubber								
3"	EF17-41-075S-201	EF17-41-075R-201	EF17-41-075SC-201	75	30	70	PP Polypropylene	光身 Nude	95	70	105X80	87X60	9	102X61	85X36
	EF17-41-075S-210	EF17-41-075R-210	EF17-41-075SC-210			70	尼龙 Nylon								
	EF17-41-075S-303	EF17-41-075R-303	EF17-41-075SC-303			70	超级聚氨脂 Super polyurethane								
	EF17-41-075S-601	EF17-41-075R-601	EF17-41-075SC-601			63	橡胶 Rubber								



PP轮
Polypropylene caster



尼龙轮
Nylon caster



超级聚氨脂轮
Super PU caster



橡胶轮
Rubber caster


EG1-6系列脚轮 EG1-6 series caster

環球脚輪
GLOBE CASTER

轮径 100-200mm Wheel diameter 100-200mm

承载 150-350kg Load capacity 150-350kg



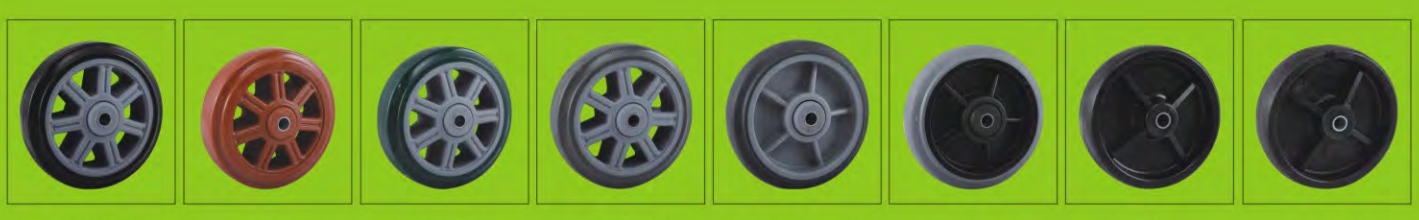

高级聚氨脂轮
High-class PU wheel

美力轮
Meili wheel

美静聚氨脂轮
Meijing wheel

超静聚氨脂轮
Super muting PU wheel

高强度人造胶轮
High-strength artificial rubber wheel

导电人造胶轮
Conductive artificial rubber wheel

PP轮
Polypropylene wheel

耐高温轮
High-heat resistant wheel



活动
Swivel



固定
Rigid



双刹活动
Swivel w/dual brake



边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	双刹活动 Swivel w/dual brake	边刹活动 Swivel w/side brake	轮径 Wheel Dia (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
4"	EG01-11-100S-208	EG01-11-100R-208	EG01-11-100SA-208	EG01-11-100SC-208	100	38	200	美力 Meili	滚珠 Ball bearing	140	93	135	114X100	84X71	11
	EG01-11-100S-302	EG01-11-100R-302	EG01-11-100SA-302	EG01-11-100SC-302			200	高级聚氨脂 High-class polyurethane							
	EG01-11-100S-310	EG01-11-100R-310	EG01-11-100SA-310	EG01-11-100SC-310			200	美静聚氨脂 Meijing polyurethane							
	EG01-11-100S-701	EG01-11-100R-701	EG01-11-100SA-701	EG01-11-100SC-701			200	铸铁 Cast iron							
	EG01-11-100S-306	EG01-11-100R-306	EG01-11-100SA-306	EG01-11-100SC-306			200	超静聚氨脂 Super muting polyurethane							
5"	EG01-11-125S-208	EG01-11-125R-208	EG01-11-125SA-208	EG01-11-125SC-208	125	38	250	美力 Meili	滚珠 Ball bearing	165	105	138	114X100	84X71	11
	EG01-11-125S-302	EG01-11-125R-302	EG01-11-125SA-302	EG01-11-125SC-302			250	高级聚氨脂 High-class polyurethane							
	EG01-11-125S-310	EG01-11-125R-310	EG01-11-125SA-310	EG01-11-125SC-310			250	美静聚氨脂 Meijing polyurethane							
	EG01-11-125S-701	EG01-11-125R-701	EG01-11-125SA-701	EG01-11-125SC-701			250	铸铁 Cast iron							
	EG01-11-125S-306	EG01-11-125R-306	EG01-11-125SA-306	EG01-11-125SC-306			250	超静聚氨脂 Super muting polyurethane							
6"	EG01-11-150S-208	EG01-11-150R-208	EG01-11-150SA-208	EG01-11-150SC-208	150	40	300	美力 Meili	滚珠 Ball bearing	190	118	148	114X100	84X71	11
	EG01-11-150S-302	EG01-11-150R-302	EG01-11-150SA-302	EG01-11-150SC-302			300	高级聚氨脂 High-class polyurethane							
	EG01-11-150S-310	EG01-11-150R-310	EG01-11-150SA-310	EG01-11-150SC-310			300	美静聚氨脂 Meijing polyurethane							
	EG01-11-150S-701	EG01-11-150R-701	EG01-11-150SA-701	EG01-11-150SC-701			300	铸铁 Cast iron							
	EG01-11-150S-306	EG01-11-150R-306	EG01-11-150SA-306	EG01-11-150SC-306			300	超静聚氨脂 Super muting polyurethane							
8"	EG01-11-200S-208	EG01-11-200R-208	EG01-11-200SA-208	EG01-11-200SC-208	200	45	350	美力 Meili	滚珠 Ball bearing	240	145	153	114X100	84X71	11
	EG01-11-200S-302	EG01-11-200R-302	EG01-11-200SA-302	EG01-11-200SC-302			350	高级聚氨脂 High-class polyurethane							
	EG01-11-200S-310	EG01-11-200R-310	EG01-11-200SA-310	EG01-11-200SC-310			350	美静聚氨脂 Meijing polyurethane							
	EG01-11-200S-701	EG01-11-200R-701	EG01-11-200SA-701	EG01-11-200SC-701			350	铸铁 Cast iron							
	EG01-11-200S-306	EG01-11-200R-306	EG01-11-200SA-306	EG01-11-200SC-306			350	超静聚氨脂 Super muting polyurethane							



美力轮
Meili caster



高级聚氨脂轮
High-class PU caster



美静聚氨脂轮
Meijing PU caster



超静聚氨脂轮
Super muting PU caster



丝杆
Threaded stem



丝杆双刹
Threaded stem w/dual brake



丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No.			轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	丝杆规格 Threaded stem size (mm)
	丝杆活动 Threaded stem	丝杆双刹 Threaded stem w/dual brake	丝杆边刹 Threaded stem w/side brake									
4"	EG01-11-100M-208	EG01-11-100MA-208	EG01-11-100MC-208	100	38	200	美力 Meili	滚珠 Ball bearing	145	93	135	16X40 (20X40)
	EG01-11-100M-302	EG01-11-100MA-302	EG01-11-100MC-302			200	高级聚氨脂 High-class polyurethane					
	EG01-11-100M-310	EG01-11-100MA-310	EG01-11-100MC-310			200	美静聚氨脂 Meijing polyurethane					
	EG01-11-100M-701	EG01-11-100MA-701	EG01-11-100MC-701			200	铸铁 Cast iron					
	EG01-11-100M-306	EG01-11-100MA-306	EG01-11-100MC-306			200	超静聚氨脂 Super muting polyurethane					
5"	EG01-11-125M-208	EG01-11-125MA-208	EG01-11-125MC-208	125	38	250	美力 Meili	滚珠 Ball bearing	170	105	138	16X40 (20X40)
	EG01-11-125M-302	EG01-11-125MA-302	EG01-11-125MC-302			250	高级聚氨脂 High-class polyurethane					
	EG01-11-125M-310	EG01-11-125MA-310	EG01-11-125MC-310			250	美静聚氨脂 Meijing polyurethane					
	EG01-11-125M-701	EG01-11-125MA-701	EG01-11-125MC-701			250	铸铁 Cast iron					
	EG01-11-125M-306	EG01-11-125MA-306	EG01-11-125MC-306			250	超静聚氨脂 Super muting polyurethane					
6"	EG01-11-150M-208	EG01-11-150MA-208	EG01-11-150MC-208	150	40	300	美力 Meili	滚珠 Ball bearing	195	118	148	16X40 (20X40)
	EG01-11-150M-302	EG01-11-150MA-302	EG01-11-150MC-302			300	高级聚氨脂 High-class polyurethane					
	EG01-11-150M-310	EG01-11-150MA-310	EG01-11-150MC-310			300	美静聚氨脂 Meijing polyurethane					
	EG01-11-150M-701	EG01-11-150MA-701	EG01-11-150MC-701			300	铸铁 Cast iron					
	EG01-11-150M-306	EG01-11-150MA-306	EG01-11-150MC-306			300	超静聚氨脂 Super muting polyurethane					
8"	EG01-11-200M-208	EG01-11-200MA-208	EG01-11-200MC-208	200	45	350	美力 Meili	滚珠 Ball bearing	245	145	153	16X40 (20X40)
	EG01-11-200M-302	EG01-11-200MA-302	EG01-11-200MC-302			350	高级聚氨脂 High-class polyurethane					
	EG01-11-200M-310	EG01-11-200MA-310	EG01-11-200MC-310			350	美静聚氨脂 Meijing polyurethane					
	EG01-11-200M-701	EG01-11-200MA-701	EG01-11-200MC-701			350	铸铁 Cast iron					
	EG01-11-200M-306	EG01-11-200MA-306	EG01-11-200MC-306			350	超静聚氨脂 Super muting polyurethane					



美力轮
Meili caster



高级聚氨脂轮
High-class PU caster



美静聚氨脂轮
Meijing PU caster



超静聚氨脂轮
Super muting PU caster



活动
Swivel



固定
Rigid



双刹活动
Swivel w/dual brake



边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	双刹活动 Swivel w/dual brake	边刹活动 Swivel w/side brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
4"	EG02-11-100S-502	EG02-11-100R-502	EG02-11-100SA-502	EG02-11-100SC-502	100	38	150	高强度人造胶(灰色) High-strength artificial rubber(Grey)	滚珠 Ball bearing	140	93	135	114X100	84X71	11
	EG02-11-100S-508	EG02-11-100R-508	EG02-11-100SA-508	EG02-11-100SC-508			150	导电人造胶 Conductive artificial rubber							
5"	EG02-11-125S-502	EG02-11-125R-502	EG02-11-125SA-502	EG02-11-125SC-502	125	38	160	高强度人造胶(灰色) High-strength artificial rubber(Grey)	滚珠 Ball bearing	165	105	138	114X100	84X71	11
	EG02-11-125S-508	EG02-11-125R-508	EG02-11-125SA-508	EG02-11-125SC-508			160	导电人造胶 Conductive artificial rubber							
6"	EG02-11-150S-502	EG02-11-150R-502	EG02-11-150SA-502	EG02-11-150SC-502	150	40	180	高强度人造胶(灰色) High-strength artificial rubber(Grey)	滚珠 Ball bearing	190	118	148	114X100	84X71	11
	EG02-11-150S-508	EG02-11-150R-508	EG02-11-150SA-508	EG02-11-150SC-508			180	导电人造胶 Conductive artificial rubber							
8"	EG02-11-200S-502	EG02-11-200R-502	EG02-11-200SA-502	EG02-11-200SC-502	200	45	220	高强度人造胶(灰色) High-strength artificial rubber(Grey)	滚珠 Ball bearing	240	145	153	114X100	84X71	11
	EG02-11-200S-508	EG02-11-200R-508	EG02-11-200SA-508	EG02-11-200SC-508			220	导电人造胶 Conductive artificial rubber							



高强度人造胶轮(灰色)
High-strength artificial rubber caster(Grey)



导电人造胶轮
Conductive artificial rubber caster



丝杆
Threaded stem



丝杆双刹
Threaded stem w/dual brake



丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No.			轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	丝杆规格 Threaded stem size (mm)
	丝杆活动 Threaded stem	丝杆双刹 Threaded stem w/dual brake	丝杆边刹 Threaded stem w/side brake									
4"	EG02-11-100M-502	EG02-11-100MA-502	EG02-11-100MC-502	100	38	150	高强度人造胶(灰色) High-strength artificial rubber(Grey)	滚珠 Ball bearing	145	93	135	16X40 (20X40)
	EG02-11-100M-508	EG02-11-100MA-508	EG02-11-100MC-508			150	导电人造胶 Conductive artificial rubber					
5"	EG02-11-125M-502	EG02-11-125MA-502	EG02-11-125MC-502	125	38	160	高强度人造胶(灰色) High-strength artificial rubber(Grey)	滚珠 Ball bearing	170	105	138	16X40 (20X40)
	EG02-11-125M-508	EG02-11-125MA-508	EG02-11-125MC-508			160	导电人造胶 Conductive artificial rubber					
6"	EG02-11-150M-502	EG02-11-150MA-502	EG02-11-150MC-502	150	40	180	高强度人造胶(灰色) High-strength artificial rubber(Grey)	滚珠 Ball bearing	195	118	148	16X40 (20X40)
	EG02-11-150M-508	EG02-11-150MA-508	EG02-11-150MC-508			180	导电人造胶 Conductive artificial rubber					
8"	EG02-11-200M-502	EG02-11-200MA-502	EG02-11-200MC-502	200	45	220	高强度人造胶(灰色) High-strength artificial rubber(Grey)	滚珠 Ball bearing	245	145	153	16X40 (20X40)
	EG02-11-200M-508	EG02-11-200MA-508	EG02-11-200MC-508			220	导电人造胶 Conductive artificial rubber					



高强度人造胶轮(灰色)
High-strength artificial rubber caster(Grey)



导电人造胶轮
Conductive artificial rubber caster



活动
Swivel



固定
Rigid



双刹活动
Swivel w/dual brake



边刹活动
Swivel w/side brake

规格 Size	编号 Code No.				轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
	活动 Swivel	固定 Rigid	双刹活动 Swivel w/dual brake	边刹活动 Swivel w/side brake											
4"	EG03-51-100S-201	EG03-51-100R-201	EG03-51-100SA-201	EG03-51-100SC-201	100	38	200	PP Polypropylene	轴套 Bushing	140	93	135	114X100	84X71	11
	EG03-51-100S-301	EG03-51-100R-301	EG03-51-100SA-301	EG03-51-100SC-301			200	高级聚氨脂 High-class polyurethane							
	EG03-51-100S-108	EG03-51-100R-108	EG03-51-100SA-108	EG03-51-100SC-108			200	耐高温 High-heat resistant							
5"	EG03-51-125S-201	EG03-51-125R-201	EG03-51-125SA-201	EG03-51-125SC-201	125	38	250	PP Polypropylene	轴套 Bushing	165	105	138	114X100	84X71	11
	EG03-51-125S-301	EG03-51-125R-301	EG03-51-125SA-301	EG03-51-125SC-301			250	高级聚氨脂 High-class polyurethane							
	EG03-51-125S-108	EG03-51-125R-108	EG03-51-125SA-108	EG03-51-125SC-108			250	耐高温 High-heat resistant							
6"	EG03-51-150S-201	EG03-51-150R-201	EG03-51-150SA-201	EG03-51-150SC-201	150	40	300	PP Polypropylene	轴套 Bushing	190	118	148	114X100	84X71	11
	EG03-51-150S-301	EG03-51-150R-301	EG03-51-150SA-301	EG03-51-150SC-301			300	高级聚氨脂 High-class polyurethane							
	EG03-51-150S-108	EG03-51-150R-108	EG03-51-150SA-108	EG03-51-150SC-108			300	耐高温 High-heat resistant							
8"	EG03-51-200S-201	EG03-51-200R-201	EG03-51-200SA-201	EG03-51-200SC-201	200	45	350	PP Polypropylene	轴套 Bushing	240	145	153	114X100	84X71	11
	EG03-51-200S-301	EG03-51-200R-301	EG03-51-200SA-301	EG03-51-200SC-301			350	高级聚氨脂 High-class polyurethane							
	EG03-51-200S-108	EG03-51-200R-108	EG03-51-200SA-108	EG03-51-200SC-108			350	耐高温 High-heat resistant							



PP轮
PP caster



耐高温轮
High-heat resistant caster



丝杆
Threaded stem



丝杆双刹
Threaded stem w/dual brake



丝杆边刹
Threaded stem w/side brake

规格 Size	编号 Code No.			轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	丝杆规格 Threaded stem size (mm)
	丝杆活动 Threaded stem	丝杆双刹 Threaded stem w/dual brake	丝杆边刹 Threaded stem w/side brake									
4"	EG03-51-100M-201	EG03-51-100MA-201	EG03-51-100MC-201	100	38	200	PP Polypropylene	轴套 Bushing	145	93	135	16X40 (20X40)
	EG03-51-100M-301	EG03-51-100MA-301	EG03-51-100MC-301			200	高级聚氨脂 High-class polyurethane					
	EG03-51-100M-108	EG03-51-100MA-108	EG03-51-100MC-108			200	耐高温 High-heat resistant					
5"	EG03-51-125M-201	EG03-51-125MA-201	EG03-51-125MC-201	125	38	250	PP Polypropylene	轴套 Bushing	170	105	138	16X40 (20X40)
	EG03-51-125M-301	EG03-51-125MA-301	EG03-51-125MC-301			250	高级聚氨脂 High-class polyurethane					
	EG03-51-125M-108	EG03-51-125MA-108	EG03-51-125MC-108			250	耐高温 High-heat resistant					
6"	EG03-51-150M-201	EG03-51-150MA-201	EG03-51-150MC-201	150	40	300	PP Polypropylene	轴套 Bushing	195	118	148	16X40 (20X40)
	EG03-51-150M-301	EG03-51-150MA-301	EG03-51-150MC-301			300	高级聚氨脂 High-class polyurethane					
	EG03-51-150M-108	EG03-51-150MA-108	EG03-51-150MC-108			300	耐高温 High-heat resistant					
8"	EG03-51-200M-201	EG03-51-200MA-201	EG03-51-200MC-201	200	45	350	PP Polypropylene	轴套 Bushing	245	145	153	16X40 (20X40)
	EG03-51-200M-301	EG03-51-200MA-301	EG03-51-200MC-301			350	高级聚氨脂 High-class polyurethane					
	EG03-51-200M-108	EG03-51-200MA-108	EG03-51-200MC-108			350	耐高温 High-heat resistant					



PP轮
PP caster



耐高温轮
High-heat resistant caster

EH1-23系列脚轮 EH1-23 series caster

環球脚輪
GLOBE CASTER

轮径 100-250mm Wheel diameter 100-250mm

承载 125-650kg Load capacity 125-650kg





超级聚氨脂轮 Super PU wheel
高级聚氨脂轮 High-class PU wheel
烽火轮 Fenghuo PU wheel
铁芯聚氨脂轮 Iron core PU wheel
高强度人造胶轮(圆边) High-strength artificial rubber wheel(Round)
高强度人造胶轮(平边) High-strength artificial rubber wheel(Flat)
导电人造胶轮(平边) Conductive artificial rubber wheel(Flat)
尼龙芯超静橡胶轮 Nylon core super muting rubber wheel
铝芯橡胶轮 Aluminium core rubber wheel



铸铁轮 Cast iron wheel
V型槽铸铁轮 V-groove cast iron wheel
超级聚氨脂轮(圆边) Super PU wheel(Round)
耐力轮(蓝色) Endurant wheel(Blue)
耐高温轮 High-heat resistant wheel
耐力轮(白色) Endurant wheel(White)
铁芯聚氨脂轮 Iron core PU wheel
打气轮 Pneumatic rubber wheel
发泡轮 Foaming rubber wheel

EH1系列-平底型-活动式/固定式(镀锌) EH1 Series-Top plate type-Swivel/Rigid(Zinc-plating)



活动
Swivel



固定
Rigid



尼龙双刹活动
Swivel w/nylon dual brake



金属双刹活动
Swivel w/metal dual brake



边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	尼龙双刹活动 Nylon dual brake	金属双刹活动 Metal dual brake	边刹活动 Swivel w/side brake	轮径 Wheel dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	金属双刹转动半径 Dual brake radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia. (mm)
4"	EH01-11-100S-302	EH01-11-100R-302	EH01-11-100SA-302	EH01-11-100SB-302	EH01-11-100SC-302	100	50	280	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	145	80	122	114X100	84X71	11
	EH01-11-100S-304	EH01-11-100R-304	EH01-11-100SA-304	EH01-11-100SB-304	EH01-11-100SC-304			280	超级聚氨脂 Super polyurethane							
	EH01-11-100S-308	EH01-11-100R-308	EH01-11-100SA-308	EH01-11-100SB-308	EH01-11-100SC-308			280	高强度聚氨脂 High-strength polyurethane							
	EH01-11-100S-402	EH01-11-100R-402	EH01-11-100SA-402	EH01-11-100SB-402	EH01-11-100SC-402			280	铁芯聚氨脂 Iron core polyurethane							
	EH01-11-100S-313	EH01-11-100R-313	EH01-11-100SA-313	EH01-11-100SB-313	EH01-11-100SC-313			280	烽火聚氨脂 Fenghuo polyurethane							
5"	EH01-11-125S-302	EH01-11-125R-302	EH01-11-125SA-302	EH01-11-125SB-302	EH01-11-125SC-302	125	50	350	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	166	96	122	114X100	84X71	11
	EH01-11-125S-304	EH01-11-125R-304	EH01-11-125SA-304	EH01-11-125SB-304	EH01-11-125SC-304			350	超级聚氨脂 Super polyurethane							
	EH01-11-125S-308	EH01-11-125R-308	EH01-11-125SA-308	EH01-11-125SB-308	EH01-11-125SC-308			350	高强度聚氨脂 High-strength polyurethane							
	EH01-11-125S-402	EH01-11-125R-402	EH01-11-125SA-402	EH01-11-125SB-402	EH01-11-125SC-402			350	铁芯聚氨脂 Iron core polyurethane							
	EH01-11-125S-313	EH01-11-125R-313	EH01-11-125SA-313	EH01-11-125SB-313	EH01-11-125SC-313			350	烽火聚氨脂 Fenghuo polyurethane							
6"	EH01-11-150S-302	EH01-11-150R-302	EH01-11-150SA-302	EH01-11-150SB-302	EH01-11-150SC-302	150	50	410	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	192	115	144	114X100	84X71	11
	EH01-11-150S-304	EH01-11-150R-304	EH01-11-150SA-304	EH01-11-150SB-304	EH01-11-150SC-304			410	超级聚氨脂 Super polyurethane							
	EH01-11-150S-308	EH01-11-150R-308	EH01-11-150SA-308	EH01-11-150SB-308	EH01-11-150SC-308			410	高强度聚氨脂 High-strength polyurethane							
	EH01-11-150S-402	EH01-11-150R-402	EH01-11-150SA-402	EH01-11-150SB-402	EH01-11-150SC-402			410	铁芯聚氨脂 Iron core polyurethane							
	EH01-11-150S-313	EH01-11-150R-313	EH01-11-150SA-313	EH01-11-150SB-313	EH01-11-150SC-313			410	烽火聚氨脂 Fenghuo polyurethane							
8"	EH01-11-200S-302	EH01-11-200R-302	EH01-11-200SA-302	EH01-11-200SB-302	EH01-11-200SC-302	200	50	420	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	243	150	151	114X100	84X71	11
	EH01-11-200S-304	EH01-11-200R-304	EH01-11-200SA-304	EH01-11-200SB-304	EH01-11-200SC-304			420	超级聚氨脂 Super polyurethane							
	EH01-11-200S-308	EH01-11-200R-308	EH01-11-200SA-308	EH01-11-200SB-308	EH01-11-200SC-308			420	高强度聚氨脂 High-strength polyurethane							
	EH01-11-200S-402	EH01-11-200R-402	EH01-11-200SA-402	EH01-11-200SB-402	EH01-11-200SC-402			420	铁芯聚氨脂 Iron core polyurethane							
	EH01-11-200S-313	EH01-11-200R-313	EH01-11-200SA-313	EH01-11-200SB-313	EH01-11-200SC-313			420	烽火聚氨脂 Fenghuo polyurethane							



高级聚氨脂轮
High-class PU caster



超级聚氨脂轮
Super PU caster



高强度聚氨脂轮
High-strength PU caster



铁芯聚氨脂轮
Iron core PU caster



烽火聚氨脂轮
Fenghuo PU caster




规格 Size	编　号 Code No.	升起高度 Extended Height	回复高度 Retracted Height	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
4"	EH01-1-100W	151	123	114X100	84X71	11
5"	EH01-1-125W	174	145	114X100	84X71	11
6"	EH01-1-150W	199	166	114X100	84X71	11
8"	EH01-1-200W	248	217	114X100	84X71	11

底板
优质钢板制造：
114mmX100mm

焊接钢结构
经久耐用的钢结构提供安全、可靠及无故障的使用效果。

脚踏板
轻易启动脚踏板升高并固定物体。

刹掣垫
防滑橡胶垫令支撑架在光滑或不平坦路面上安全稳固。本设计仅适用于水平的地板上。

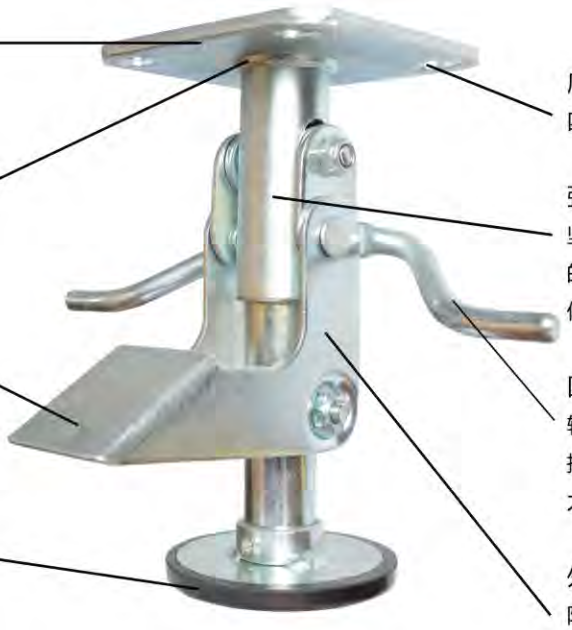


底板孔
四个槽孔轻易安装。

弹簧（在钢管内）
坚固耐用高弹性优良的弹簧可承载重型物体。

回复杆
轻压一下回复杆使支撑架立刻缩回原状省力易操作。

外表处理
防锈光亮的镀锌处理令其又漂亮又耐用。

支撑架安装位置

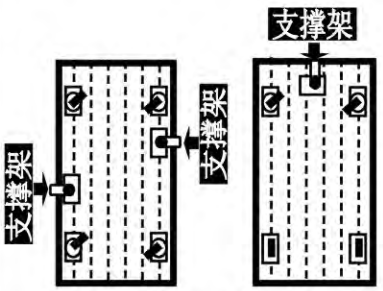

用于配备四个活动脚轮运输车的支撑架安装位置建议

用于配备两个活动、固定脚轮运输车的支撑架安装位置建议

支撑架安装：支撑架在设计时仅适用于水平地面，而不适用于倾斜地面。选择恰当型号的支撑架很重要。现在把支撑架安装上你的运输车，你就可以用脚来操纵它，既方便又实用。

EH2系列-平底型-活动式/固定式(镀锌) EH2 Series-Top plate type-Swivel/Rigid(Zinc-plating)



活动
Swivel



固定
Rigid



金属双刹活动
Swivel w/metal dual brake



边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	金属双刹活动 Metal dual brake	边刹活动 Swivel w/side brake	轮径 Wheel dia (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	金属双刹转动半径 Dual brake radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia (mm)
4"	EH02-11-100S-501	EH02-11-100R-501	EH02-11-100SB-501	EH02-11-100SC-501	100	50	150	高强度人造胶(圆边) High-strength artificial rubber(Round)	滚珠 Ball bearing	145	80	122	114X100	84X71	11
	EH02-11-100S-502	EH02-11-100R-502	EH02-11-100SB-502	EH02-11-100SC-502			160	高强度人造胶(平边) High-strength artificial rubber(Flat)							
	EH02-11-100S-507	EH02-11-100R-507	EH02-11-100SB-507	EH02-11-100SC-507			150	导电人造胶(圆边) Conductive artificial rubber(Round)							
	EH02-11-100S-508	EH02-11-100R-508	EH02-11-100SB-508	EH02-11-100SC-508			160	导电人造胶(平边) Conductive artificial rubber(Flat)							
5"	EH02-11-125S-501	EH02-11-125R-501	EH02-11-125SB-501	EH02-11-125SC-501	125	50	170	高强度人造胶(圆边) High-strength artificial rubber(Round)	滚珠 Ball bearing	166	96	122	114X100	84X71	11
	EH02-11-125S-502	EH02-11-125R-502	EH02-11-125SB-502	EH02-11-125SC-502			180	高强度人造胶(平边) High-strength artificial rubber(Flat)							
	EH02-11-125S-507	EH02-11-125R-507	EH02-11-125SB-507	EH02-11-125SC-507			170	导电人造胶(圆边) Conductive artificial rubber(Round)							
	EH02-11-125S-508	EH02-11-125R-508	EH02-11-125SB-508	EH02-11-125SC-508			180	导电人造胶(平边) Conductive artificial rubber(Flat)							
6"	EH02-11-150S-501	EH02-11-150R-501	EH02-11-150SB-501	EH02-11-150SC-501	150	50	210	高强度人造胶(圆边) High-strength artificial rubber(Round)	滚珠 Ball bearing	192	115	144	114X100	84X71	11
	EH02-11-150S-502	EH02-11-150R-502	EH02-11-150SB-502	EH02-11-150SC-502			280	高强度人造胶(平边) High-strength artificial rubber(Flat)							
	EH02-11-150S-507	EH02-11-150R-507	EH02-11-150SB-507	EH02-11-150SC-507			210	导电人造胶(圆边) Conductive artificial rubber(Round)							
	EH02-11-150S-508	EH02-11-150R-508	EH02-11-150SB-508	EH02-11-150SC-508			280	导电人造胶(平边) Conductive artificial rubber(Flat)							
8"	EH02-11-200S-501	EH02-11-200R-501	EH02-11-200SB-501	EH02-11-200SC-501	200	50	270	高强度人造胶(圆边) High-strength artificial rubber(Round)	滚珠 Ball bearing	243	150	151	114X100	84X71	11
	EH02-11-200S-502	EH02-11-200R-502	EH02-11-200SB-502	EH02-11-200SC-502			310	高强度人造胶(平边) High-strength artificial rubber(Flat)							
	EH02-11-200S-507	EH02-11-200R-507	EH02-11-200SB-507	EH02-11-200SC-507			270	导电人造胶(圆边) Conductive artificial rubber(Round)							
	EH02-11-200S-508	EH02-11-200R-508	EH02-11-200SB-508	EH02-11-200SC-508			310	导电人造胶(平边) Conductive artificial rubber(Flat)							



高强度人造胶轮(圆边)
High-strength artificial rubber caster(Round)



高强度人造胶轮(平边)
High-strength artificial rubber caster(Flat)



导电人造胶轮(圆边)
Conductive artificial rubber caster(Round)



导电人造胶轮(平边)
Conductive artificial rubber caster(Flat)

EH3系列-平底型-活动式/固定式(镀锌) EH3 Series-Top plate type-Swivel/Rigid(Zinc-plating)



活动
Swivel



固定
Rigid



金属双刹活动
Swivel w/metal dual brake



边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	金属双刹活动 Metal dual brake	边刹活动 Swivel w/side brake	轮径 Wheel dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	金属双刹转动半径 Dual brake radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia. (mm)
4"	EH03-11-100S-606	EH03-11-100R-606	EH03-11-100SB-606	EH03-11-100SC-606	100	50	250	尼龙芯高级橡胶 Nylon core high-class rubber	滚珠 Ball bearing	145	80	122	114X100	84X71	11
	EH03-11-100S-608	EH03-11-100R-608	EH03-11-100SB-608	EH03-11-100SC-608			250	尼龙芯超静橡胶 Nylon core super muting rubber							
	EH03-11-100S-614	EH03-11-100R-614	EH03-11-100SB-614	EH03-11-100SC-614			250	铝芯橡胶 Aluminium core rubber							
5"	EH03-11-125S-606	EH03-11-125R-606	EH03-11-125SB-606	EH03-11-125SC-606	125	50	300	尼龙芯高级橡胶 Nylon core high-class rubber	滚珠 Ball bearing	166	96	122	114X100	84X71	11
	EH03-11-125S-608	EH03-11-125R-608	EH03-11-125SB-608	EH03-11-125SC-608			300	尼龙芯超静橡胶 Nylon core super muting rubber							
	EH03-11-125S-614	EH03-11-125R-614	EH03-11-125SB-614	EH03-11-125SC-614			300	铝芯橡胶 Aluminium core rubber							
6"	EH03-11-150S-606	EH03-11-150R-606	EH03-11-150SB-606	EH03-11-150SC-606	150	50	350	尼龙芯高级橡胶 Nylon core high-class rubber	滚珠 Ball bearing	192	115	144	114X100	84X71	11
	EH03-11-150S-608	EH03-11-150R-608	EH03-11-150SB-608	EH03-11-150SC-608			350	尼龙芯超静橡胶 Nylon core super muting rubber							
	EH03-11-150S-614	EH03-11-150R-614	EH03-11-150SB-614	EH03-11-150SC-614			350	铝芯橡胶 Aluminium core rubber							
8"	EH03-11-200S-606	EH03-11-200R-606	EH03-11-200SB-606	EH03-11-200SC-606	200	50	400	尼龙芯高级橡胶 Nylon core high-class rubber	滚珠 Ball bearing	243	150	151	114X100	84X71	11
	EH03-11-200S-608	EH03-11-200R-608	EH03-11-200SB-608	EH03-11-200SC-608			400	尼龙芯超静橡胶 Nylon core super muting rubber							
	EH03-11-200S-614	EH03-11-200R-614	EH03-11-200SB-614	EH03-11-200SC-614			400	铝芯橡胶 Aluminium core rubber							



尼龙芯高级橡胶轮
Nylon core high-class rubber caster



尼龙芯超静橡胶轮
Nylon core super muting rubber caster



铝芯橡胶轮
Aluminium centre rubber caster

EH4系列-平底型-活动式/固定式(镀锌) EH4 Series-Top plate type-Swivel/Rigid(Zinc-plating)



活动
Swivel



固定
Rigid



金属双刹活动
Swivel w/metal dual brake



边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	金属双刹活动 Metal dual brake	边刹活动 Swivel w/side brake	轮径 Wheel dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	金属双刹转动半径 Dual brake radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia. (mm)
4"	EH04-21-100S-304	EH04-21-100R-304	EH04-21-100SB-304	EH04-21-100SC-304	100	50	280	超级聚氨脂 Super polyurethane	滚柱 Roller bearing	145	80	122	114X100	84X71	11
	EH04-21-100S-402	EH04-21-100R-402	EH04-21-100SB-402	EH04-21-100SC-402			280	铁芯聚氨脂 Iron core polyurethane							
	EH04-21-100S-209	EH04-21-100R-209	EH04-21-100SB-209	EH04-21-100SC-209			280	酚醛 Phenolic							
	EH04-21-100S-701	EH04-21-100R-701	EH04-21-100SB-701	EH04-21-100SC-701			290	铸铁 Cast iron							
	EH04-21-100S-702	EH04-21-100R-702					290	V型槽铸铁 V-Groove cast iron							
5"	EH04-21-125S-304	EH04-21-125R-304	EH04-21-125SB-304	EH04-21-125SC-304	125	50	350	超级聚氨脂 Super polyurethane	滚柱 Roller bearing	166	96	122	114X100	84X71	11
	EH04-21-125S-402	EH04-21-125R-402	EH04-21-125SB-402	EH04-21-125SC-402			350	铁芯聚氨脂 Iron core polyurethane							
	EH04-21-125S-209	EH04-21-125R-209	EH04-21-125SB-209	EH04-21-125SC-209			350	酚醛 Phenolic							
	EH04-21-125S-701	EH04-21-125R-701	EH04-21-125SB-701	EH04-21-125SC-701			360	铸铁 Cast iron							
	EH04-21-125S-702	EH04-21-125R-702					360	V型槽铸铁 V-Groove cast iron							
6"	EH04-21-150S-304	EH04-21-150R-304	EH04-21-150SB-304	EH04-21-150SC-304	150	50	410	超级聚氨脂 Super polyurethane	滚柱 Roller bearing	192	115	144	114X100	84X71	11
	EH04-21-150S-402	EH04-21-150R-402	EH04-21-150SB-402	EH04-21-150SC-402			410	铁芯聚氨脂 Iron core polyurethane							
	EH04-21-150S-209	EH04-21-150R-209	EH04-21-150SB-209	EH04-21-150SC-209			410	酚醛 Phenolic							
	EH04-21-150S-701	EH04-21-150R-701	EH04-21-150SB-701	EH04-21-150SC-701			420	铸铁 Cast iron							
	EH04-21-150S-702	EH04-21-150R-702					420	V型槽铸铁 V-Groove cast iron							
8"	EH04-21-200S-304	EH04-21-200R-304	EH04-21-200SB-304	EH04-21-200SC-304	200	50	420	超级聚氨脂 Super polyurethane	滚柱 Roller bearing	243	150	151	114X100	84X71	11
	EH04-21-200S-402	EH04-21-200R-402	EH04-21-200SB-402	EH04-21-200SC-402			420	铁芯聚氨脂 Iron core polyurethane							
	EH04-21-200S-209	EH04-21-200R-209	EH04-21-200SB-209	EH04-21-200SC-209			420	酚醛 Phenolic							
	EH04-21-200S-701	EH04-21-200R-701	EH04-21-200SB-701	EH04-21-200SC-701			430	铸铁 Cast iron							
	EH04-21-200S-702	EH04-21-200R-702					430	V型槽铸铁 V-Groove cast iron							



超级聚氨脂轮
Super PU caster



铁芯聚氨脂轮
Iron core PU caster



铸铁轮
Cast iron caster



V型槽铸铁轮
V-Groove cast iron caster

EH7系列-平底型-活动式/固定式(镀锌) EH7 Series-Top plate type-Swivel/Rigid(Zinc-plating)



活动
Swivel



固定
Rigid



金属双刹活动
Swivel w/metal dual brake



边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	金属双刹活动 Metal dual brake	边刹活动 Swivel w/side brake	轮径 Wheel dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	金属双刹转动半径 Dual brake radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia. (mm)
4"	EH07-11-100S-301	EH07-11-100R-301	EH07-11-100SB-301	EH07-11-100SC-301	100	48	200	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	145	80	122	114X100	84X71	11
	EH07-11-100S-303	EH07-11-100R-303	EH07-11-100SB-303	EH07-11-100SC-303			200	超级聚氨脂 Super polyurethane							
	EH07-11-100S-207	EH07-11-100R-207	EH07-11-100SB-207	EH07-11-100SC-207			280	耐力(蓝色) Endurant(Blue)							
	EH07-11-100S-108	EH07-11-100R-108	EH07-11-100SB-108	EH07-11-100SC-108			370	耐高温 High-heat resistant							
	EH07-51-100S-108	EH07-51-100R-108	EH07-51-100SB-108	EH07-51-100SC-108			370	耐高温 High-heat resistant	轴套 Bushing	145	80	122	114X100	84X71	11
5"	EH07-11-125S-301	EH07-11-125R-301	EH07-11-125SB-301	EH07-11-125SC-301	125	48	250	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	166	96	122	114X100	84X71	11
	EH07-11-125S-303	EH07-11-125R-303	EH07-11-125SB-303	EH07-11-125SC-303			250	超级聚氨脂 Super polyurethane							
	EH07-11-125S-207	EH07-11-125R-207	EH07-11-125SB-207	EH07-11-125SC-207			350	耐力(蓝色) Endurant(Blue)							
	EH07-11-125S-108	EH07-11-125R-108	EH07-11-125SB-108	EH07-11-125SC-108			460	耐高温 High-heat resistant							
	EH07-51-125S-108	EH07-51-125R-108	EH07-51-125SB-108	EH07-51-125SC-108			460	耐高温 High-heat resistant	轴套 Bushing	166	96	122	114X100	84X71	11
6"	EH07-11-150S-301	EH07-11-150R-301	EH07-11-150SB-301	EH07-11-150SC-301	150	48	300	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	192	115	144	114X100	84X71	11
	EH07-11-150S-303	EH07-11-150R-303	EH07-11-150SB-303	EH07-11-150SC-303			300	超级聚氨脂 Super polyurethane							
	EH07-11-150S-207	EH07-11-150R-207	EH07-11-150SB-207	EH07-11-150SC-207			410	耐力(蓝色) Endurant(Blue)							
	EH07-11-150S-108	EH07-11-150R-108	EH07-11-150SB-108	EH07-11-150SC-108			480	耐高温 High-heat resistant							
	EH07-51-150S-108	EH07-51-150R-108	EH07-51-150SB-108	EH07-51-150SC-108			480	耐高温 High-heat resistant	轴套 Bushing	192	115	144	114X100	84X71	11
8"	EH07-11-200S-301	EH07-11-200R-301	EH07-11-200SB-301	EH07-11-200SC-301	200	48	350	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	243	150	151	114X100	84X71	11
	EH07-11-200S-303	EH07-11-200R-303	EH07-11-200SB-303	EH07-11-200SC-303			350	超级聚氨脂 Super polyurethane							
	EH07-11-200S-207	EH07-11-200R-207	EH07-11-200SB-207	EH07-11-200SC-207			420	耐力(蓝色) Endurant(Blue)							
	EH07-11-200S-108	EH07-11-200R-108	EH07-11-200SB-108	EH07-11-200SC-108			510	耐高温 High-heat resistant							
	EH07-51-200S-108	EH07-51-200R-108	EH07-51-200SB-108	EH07-51-200SC-108			510	耐高温 High-heat resistant	轴套 Bushing	243	150	151	114X100	84X71	11



耐力轮(蓝色)
Endurant caster(Blue)



超级聚氨脂轮
Super PU caster



高级聚氨脂轮
High-class PU caster



耐高温轮
High-heat resistant caster

EH7系列-平底型-活动式/固定式(镀锌) EH7 Series-Top plate type-Swivel/Rigid(Zinc-plating)



活动
Swivel



固定
Rigid



金属双刹活动
Swivel w/metal dual brake



边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	金属双刹活动 Metal dual brake	边刹活动 Swivel w/side brake	轮径 Wheel dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	金属双刹转动半径 Dual brake radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia. (mm)
4"	EH07-11-100S-401	EH07-11-100R-401	EH07-11-100SB-401	EH07-11-100SC-401	100	48	280	铁芯聚氨脂(红色) Iron core polyurethane(Red)	滚珠 Ball bearing	145	80	122	114X100	84X71	11
	EH07-11-100S-403	EH07-11-100R-403	EH07-11-100SB-403	EH07-11-100SC-403			280	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)							
	EH07-11-100S-410	EH07-11-100R-410	EH07-11-100SB-410	EH07-11-100SC-410			280	铁芯聚氨脂(白色) Iron core polyurethane(White)							
5"	EH07-11-125S-401	EH07-11-125R-401	EH07-11-125SB-401	EH07-11-125SC-401	125	48	350	铁芯聚氨脂(红色) Iron core polyurethane(Red)	滚珠 Ball bearing	166	96	122	114X100	84X71	11
	EH07-11-125S-403	EH07-11-125R-403	EH07-11-125SB-403	EH07-11-125SC-403			350	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)							
	EH07-11-125S-410	EH07-11-125R-410	EH07-11-125SB-410	EH07-11-125SC-410			350	铁芯聚氨脂(白色) Iron core polyurethane(White)							
6"	EH07-11-150S-401	EH07-11-150R-401	EH07-11-150SB-401	EH07-11-150SC-401	150	48	410	铁芯聚氨脂(红色) Iron core polyurethane(Red)	滚珠 Ball bearing	192	115	144	114X100	84X71	11
	EH07-11-150S-403	EH07-11-150R-403	EH07-11-150SB-403	EH07-11-150SC-403			410	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)							
	EH07-11-150S-410	EH07-11-150R-410	EH07-11-150SB-410	EH07-11-150SC-410			410	铁芯聚氨脂(白色) Iron core polyurethane(White)							
8"	EH07-11-200S-401	EH07-11-200R-401	EH07-11-200SB-401	EH07-11-200SC-401	200	48	420	铁芯聚氨脂(红色) Iron core polyurethane(Red)	滚珠 Ball bearing	243	150	151	114X100	84X71	11
	EH07-11-200S-403	EH07-11-200R-403	EH07-11-200SB-403	EH07-11-200SC-403			420	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)							
	EH07-11-200S-410	EH07-11-200R-410	EH07-11-200SB-410	EH07-11-200SC-410			420	铁芯聚氨脂(白色) Iron core polyurethane(White)							



铁芯聚氨脂轮(红色)
Iron core PU caster(Red)



铁芯聚氨脂轮(黄色)
Iron core PU caster(Yellow)



铁芯聚氨脂轮(白色)
Iron core PU caster(White)

EH8系列-平底型-活动式/固定式(镀锌) EH8 Series-Top plate type-Swivel/Rigid(Zinc-plating)



活动
Swivel



固定
Rigid



金属双刹活动
Swivel w/metal dual brake



边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	金属双刹活动 Metal dual brake	边刹活动 Swivel w/side brake	轮径 Wheel dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	金属双刹转动半径 Dual brake radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia. (mm)
4"	EH08-11-100S-302	EH08-11-100R-302	EH08-11-100SB-302	EH08-11-100SC-302	100	45	200	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	145	80	122	114X100	84X71	11
	EH08-11-100S-304	EH08-11-100R-304	EH08-11-100SB-304	EH08-11-100SC-304			200	超级聚氨脂 Super polyurethane							
	EH08-11-100S-402	EH08-11-100R-402	EH08-11-100SB-402	EH08-11-100SC-402			200	铁芯聚氨脂 Iron-core polyurethane							
	EH08-11-100S-210	EH08-11-100R-210		EH08-11-100SC-210			200	尼龙(黄色) Nylon(Yellow)	滚珠 Ball bearing	139	77		114X100	84X71	11
	EH08-21-100S-402	EH08-21-100R-402		EH08-21-100SC-402			200	铁芯聚氨脂 Iron-core polyurethane	滚柱 Roller bearing	145	80		114X100	84X71	11
5"	EH08-11-125S-302	EH08-11-125R-302	EH08-11-125SB-302	EH08-11-125SC-302	125	45	250	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	166	96	122	114X100	84X71	11
	EH08-11-125S-304	EH08-11-125R-304	EH08-11-125SB-304	EH08-11-125SC-304			250	超级聚氨脂 Super polyurethane							
	EH08-11-125S-402	EH08-11-125R-402	EH08-11-125SB-402	EH08-11-125SC-402			250	铁芯聚氨脂 Iron-core polyurethane							
	EH08-11-125S-210	EH08-11-125R-210		EH08-11-125SC-210			250	尼龙(黄色) Nylon(Yellow)	滚珠 Ball bearing	160	93		114X100	84X71	11
	EH08-21-125S-402	EH08-21-125R-402		EH08-21-125SC-402			250	铁芯聚氨脂 Iron-core polyurethane	滚柱 Roller bearing	166	96		114X100	84X71	11
6"	EH08-11-150S-302	EH08-11-150R-302	EH08-11-150SB-302	EH08-11-150SC-302	150	45	300	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	192	115	144	114X100	84X71	11
	EH08-11-150S-304	EH08-11-150R-304	EH08-11-150SB-304	EH08-11-150SC-304			300	超级聚氨脂 Super polyurethane							
	EH08-11-150S-402	EH08-11-150R-402	EH08-11-150SB-402	EH08-11-150SC-402			300	铁芯聚氨脂 Iron-core polyurethane							
	EH08-11-150S-210	EH08-11-150R-210		EH08-11-150SC-210			300	尼龙(黄色) Nylon(Yellow)	滚珠 Ball bearing	186	112		114X100	84X71	11
	EH08-21-150S-402	EH08-21-150R-402		EH08-21-150SC-402			300	铁芯聚氨脂 Iron-core polyurethane	滚柱 Roller bearing	192	115		114X100	84X71	11
8"	EH08-11-200S-302	EH08-11-200R-302	EH08-11-200SB-302	EH08-11-200SC-302	200	45	350	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	243	150	151	114X100	84X71	11
	EH08-11-200S-304	EH08-11-200R-304	EH08-11-200SB-304	EH08-11-200SC-304			350	超级聚氨脂 Super polyurethane							
	EH08-11-200S-402	EH08-11-200R-402	EH08-11-200SB-402	EH08-11-200SC-402			350	铁芯聚氨脂 Iron-core polyurethane							
	EH08-11-200S-210	EH08-11-200R-210		EH08-11-200SC-210			350	尼龙(黄色) Nylon(Yellow)	滚珠 Ball bearing	233	145		114X100	84X71	11
	EH08-21-200S-402	EH08-21-200R-402		EH08-21-200SC-402			350	铁芯聚氨脂 Iron-core polyurethane	滚柱 Roller bearing	243	150		114X100	84X71	11



高级聚氨脂轮
High-class PU caster



超级聚氨脂轮
Super PU caster



铁芯聚氨脂轮
Iron core PU caster



尼龙轮(黄色)
Nylon caster(Yellow)

EH9系列-平底型-活动式/固定式(镀彩锌) EH9 Series-Top plate type-Swivel/Rigid(Colored-plating)



活动钢芯打气轮
Swivel iron core pneumatic caster



固定钢芯打气轮
Rigid iron core pneumatic caster



活动发泡轮
Swivel Foaming caster



固定发泡轮
Rigid Foaming caster

规格 Size	编号 Code No. 活动 Swivel	编号 Code No. 固定 Rigid	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
8"	EH09-12-200S-617	EH09-12-200R-617	200	65	125	打气橡胶 Pneumatic rubber	滚珠 Ball bearing	250	162	114X100	84X71	11
	EH09-12-200S-618	EH09-12-200R-618			150	发泡橡胶 Foaming rubber						
10"	EH09-12-250S-617	EH09-12-250R-617	250	86	136	打气橡胶 Pneumatic rubber	滚珠 Ball bearing	290	187	114X100	84X71	11
	EH09-12-250S-618	EH09-12-250R-618		65	180	发泡橡胶 Foaming rubber						

EH9系列-平底型-活动式/固定式(镀金) EH9 Series-Top plate type-Swivel/Rigid(Gold-plating)



活动钢芯打气轮
Swivel iron core pneumatic caster



固定钢芯打气轮
Rigid iron core pneumatic caster



活动发泡轮
Swivel Foaming caster



固定发泡轮
Rigid Foaming caster

规格 Size	编号 Code No. 活动 Swivel	编号 Code No. 固定 Rigid	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
8"	EH09-15-200S-617	EH09-15-200R-617	200	65	125	打气橡胶 Pneumatic rubber	滚珠 Ball bearing	250	162	114X100	84X71	11
	EH09-15-200S-618	EH09-15-200R-618			150	发泡橡胶 Foaming rubber						
10"	EH09-15-250S-617	EH09-15-250R-617	250	86	136	打气橡胶 Pneumatic rubber	滚珠 Ball bearing	290	187	114X100	84X71	11
	EH09-15-250S-618	EH09-15-250R-618		65	180	发泡橡胶 Foaming rubber						

EH10系列-平底型-活动式/固定式(不锈钢) EH10 Series-Top plate type-Swivel/Rigid(Stainless steel)



不锈钢活动
Stainless steel swivel



不锈钢固定
Stainless steel rigid



不锈钢双刹活动
Swivel w/stainless steel dual brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	金属双刹活动 Metal dual brake	边刹活动 Swivel w/side brake	轮径 Wheel dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	金属双刹转动半径 Dual brake radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia. (mm)
4"	EH10-16-100S-211	EH10-16-100R-211	EH10-16-100SB-211	EH10-16-100SC-211	100	50	280	耐力(白色) Endurant(White)	滚珠 Ball bearing	145	80	122	114X100	84X71	11
	EH10-16-100S-302	EH10-16-100R-302	EH10-16-100SB-302	EH10-16-100SC-302			280	高级聚氨脂 High-class polyurethane							
	EH10-16-100S-304	EH10-16-100R-304	EH10-16-100SB-304	EH10-16-100SC-304			280	超级聚氨脂 Super polyurethane							
	EH10-16-100S-502	EH10-16-100R-502	EH10-16-100SB-502	EH10-16-100SC-502			160	高强度人造胶(平边) High-strength artificial rubber(Flat)							
5"	EH10-16-125S-211	EH10-16-125R-211	EH10-16-125SB-211	EH10-16-125SC-211	125	50	350	耐力(白色) Endurant(White)	滚珠 Ball bearing	166	96	122	114X100	84X71	11
	EH10-16-125S-302	EH10-16-125R-302	EH10-16-125SB-302	EH10-16-125SC-302			350	高级聚氨脂 High-class polyurethane							
	EH10-16-125S-304	EH10-16-125R-304	EH10-16-125SB-304	EH10-16-125SC-304			350	超级聚氨脂 Super polyurethane							
	EH10-16-125S-502	EH10-16-125R-502	EH10-16-125SB-502	EH10-16-125SC-502			180	高强度人造胶(平边) High-strength artificial rubber(Flat)							
6"	EH10-16-150S-211	EH10-16-150R-211	EH10-16-150SB-211	EH10-16-150SC-211	150	50	410	耐力(白色) Endurant(White)	滚珠 Ball bearing	192	115	144	114X100	84X71	11
	EH10-16-150S-302	EH10-16-150R-302	EH10-16-150SB-302	EH10-16-150SC-302			410	高级聚氨脂 High-class polyurethane							
	EH10-16-150S-304	EH10-16-150R-304	EH10-16-150SB-304	EH10-16-150SC-304			410	超级聚氨脂 Super polyurethane							
	EH10-16-150S-502	EH10-16-150R-502	EH10-16-150SB-502	EH10-16-150SC-502			280	高强度人造胶(平边) High-strength artificial rubber(Flat)							
8"	EH10-16-200S-211	EH10-16-200R-211	EH10-16-200SB-211	EH10-16-200SC-211	200	50	420	耐力(白色) Endurant(White)	滚珠 Ball bearing	243	150	151	114X100	84X71	11
	EH10-16-200S-302	EH10-16-200R-302	EH10-16-200SB-302	EH10-16-200SC-302			420	高级聚氨脂 High-class polyurethane							
	EH10-16-200S-304	EH10-16-200R-304	EH10-16-200SB-304	EH10-16-200SC-304			420	超级聚氨脂 Super polyurethane							
	EH10-16-200S-502	EH10-16-200R-502	EH10-16-200SB-502	EH10-16-200SC-502			310	高强度人造胶(平边) High-strength artificial rubber(Flat)							



耐力轮(白色)
Endurant caster(White)



高级聚氨脂轮
High-class PU caster



超级聚氨脂轮
Super PU caster



高强度人造胶轮(平边)
High-strength artificial rubber caster(Flat)

EH11系列-防震-活动式/固定式(镀锌) EH11 Series-Shock absorbing type -Swivel/Rigid(Zinc-plating)



防震活动
Shock absorbing swivel



防震固定
Shock absorbing rigid

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	轮径 Wheel dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia. (mm)	弹簧预张力 Pretension of spring (kg)	弹簧极限张力 Ultimate tension of spring (kg)	弹簧行程 Spring Distance (mm)
5"	EH11-11-125LS-401	EH11-11-125LR-401	125	48	300	铁芯聚氨脂(红色) Iron core polyurethane(Red)	滚珠 Ball bearing	183	112	158X114	128X73	13	50	300	10
	EH11-11-125LS-403	EH11-11-125LR-403			300	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)									
	EH11-11-125LS-606	EH11-11-125LR-606		50	300	尼龙芯高级橡胶 Nylon core high-class rubber									
	EH11-11-125LS-608	EH11-11-125LR-608			300	尼龙芯超静橡胶 Nylon core super muting rubber									
	EH11-11-125LS-614	EH11-11-125LR-614			300	铝芯橡胶 Aluminium core rubber									
6"	EH11-11-150LS-401	EH11-11-150LR-401	150	48	350	铁芯聚氨脂(红色) Iron core polyurethane(Red)	滚珠 Ball bearing	195	125	158X114	128X73	13	50	350	10
	EH11-11-150LS-403	EH11-11-150LR-403			350	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)									
	EH11-11-150LS-606	EH11-11-150LR-606		50	350	尼龙芯高级橡胶 Nylon core high-class rubber									
	EH11-11-150LS-608	EH11-11-150LR-608			350	尼龙芯超静橡胶 Nylon core super muting rubber									
	EH11-11-150LS-614	EH11-11-150LR-614			350	铝芯橡胶 Aluminium core rubber									
8"	EH11-11-200LS-401	EH11-11-200LR-401	200	48	400	铁芯聚氨脂(红色) Iron core polyurethane(Red)	滚珠 Ball bearing	245	163	158X114	128X73	13	50	400	10
	EH11-11-200LS-403	EH11-11-200LR-403			400	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)									
	EH11-11-200LS-606	EH11-11-200LR-606		50	400	尼龙芯高级橡胶 Nylon core high-class rubber									
	EH11-11-200LS-608	EH11-11-200LR-608			400	尼龙芯超静橡胶 Nylon core super muting rubber									
	EH11-11-200LS-614	EH11-11-200LR-614			400	铝芯橡胶 Aluminium core rubber									



铁芯聚氨脂轮(红色)
Iron core PU caster(Red)



铁芯聚氨脂轮(黄色)
Iron core PU caster(Yellow)



尼龙芯高级橡胶轮
Nylon core high-class rubber caster



尼龙芯超静橡胶轮
Nylon core super muting rubber caster



铝芯橡胶轮
Aluminium core rubber caster



防震刹制活动
Shock absorbing swivel with brake



防震刹制固定
Shock absorbing rigid with brake

规格 Size	编号 Code No. 刹制活动 Swivel with brake	刹制固定 Rigid with brake	轮径 Wheel dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	单刹转动半径 Swivel radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia. (mm)	弹簧预张力 Pretension of spring (kg)	弹簧极限张力 Ultimate tension of spring (kg)	弹簧行程 Spring Distance (mm)
5"	EH11-11-125LE-401	EH11-11-125LF-401	125	48	300	铁芯聚氨脂(红色) Iron core polyurethane(Red)	滚珠 Ball bearing	183	200	158X114	128X73	13	50	300	10
	EH11-11-125LE-403	EH11-11-125LF-403			300	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)									
	EH11-11-125LE-606	EH11-11-125LF-606		50	300	尼龙芯高级橡胶 Nylon core high-class rubber									
	EH11-11-125LE-608	EH11-11-125LF-608			300	尼龙芯超静橡胶 Nylon core super muting rubber									
	EH11-11-125LE-614	EH11-11-125LF-614			300	铝芯橡胶 Aluminium core rubber									
6"	EH11-11-150LE-401	EH11-11-150LF-401	150	48	350	铁芯聚氨脂(红色) Iron core polyurethane(Red)	滚珠 Ball bearing	195	210	158X114	128X73	13	50	350	10
	EH11-11-150LE-403	EH11-11-150LF-403			350	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)									
	EH11-11-150LE-606	EH11-11-150LF-606		50	350	尼龙芯高级橡胶 Nylon core high-class rubber									
	EH11-11-150LE-608	EH11-11-150LF-608			350	尼龙芯超静橡胶 Nylon core super muting rubber									
	EH11-11-150LE-614	EH11-11-150LF-614			350	铝芯橡胶 Aluminium core rubber									
8"	EH11-11-200LE-401	EH11-11-200LF-401	200	48	400	铁芯聚氨脂(红色) Iron core polyurethane(Red)	滚珠 Ball bearing	245	245	158X114	128X73	13	50	400	10
	EH11-11-200LE-403	EH11-11-200LF-403			400	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)									
	EH11-11-200LE-606	EH11-11-200LF-606		50	400	尼龙芯高级橡胶 Nylon core high-class rubber									
	EH11-11-200LE-608	EH11-11-200LF-608			400	尼龙芯超静橡胶 Nylon core super muting rubber									
	EH11-11-200LE-614	EH11-11-200LF-614			400	铝芯橡胶 Aluminium core rubber									



铁芯聚氨脂轮(红色)
Iron core PU caster(Red)



铁芯聚氨脂轮(黄色)
Iron core PU caster(Yellow)



尼龙芯高级橡胶轮
Nylon core high-class rubber caster



尼龙芯超静橡胶轮
Nylon core super muting rubber caster



铝芯橡胶轮
Aluminium core rubber caster



耐力轮(蓝色)
Endurant caster(Blue)



高级聚氨脂轮
High-class PU caster



超级聚氨脂轮
Super PU caster



高强度人造胶轮(平边)
High-strength artificial rubber caster(Flat)

规格 Size	编号 Code No. / 活动 Swivel	轮径 Wheel dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia. (mm)
4"	EH12-11-100VS-207	100	50	280	耐力(蓝色) Endurant(Blue)	滚珠 Ball bearing	147	82	114X100	84X71	11
	EH12-11-100VS-302			280	高级聚氨脂 High-class polyurethane						
	EH12-11-100VS-304			280	超级聚氨脂 Super polyurethane						
	EH12-11-100VS-502			160	高强度人造胶(平边) High-strength artificial rubber(Flat)						
5"	EH12-11-125VS-207	125	50	350	耐力(蓝色) Endurant(Blue)	滚珠 Ball bearing	168	102	114X100	84X71	11
	EH12-11-125VS-302			350	高级聚氨脂 High-class polyurethane						
	EH12-11-125VS-304			350	超级聚氨脂 Super polyurethane						
	EH12-11-125VS-502			180	高强度人造胶(平边) High-strength artificial rubber(Flat)						
6"	EH12-11-150VS-207	150	50	410	耐力(蓝色) Endurant(Blue)	滚珠 Ball bearing	195	115	114X100	84X71	11
	EH12-11-150VS-302			410	高级聚氨脂 High-class polyurethane						
	EH12-11-150VS-304			410	超级聚氨脂 Super polyurethane						
	EH12-11-150VS-502			280	高强度人造胶(平边) High-strength artificial rubber(Flat)						
8"	EH12-11-200VS-207	200	50	420	耐力(蓝色) Endurant(Blue)	滚珠 Ball bearing	244	155	114X100	84X71	11
	EH12-11-200VS-302			420	高级聚氨脂 High-class polyurethane						
	EH12-11-200VS-304			420	超级聚氨脂 Super polyurethane						
	EH12-11-200VS-502			310	高强度人造胶(平边) High-strength artificial rubber(Flat)						



耐力轮(蓝色)
Endurant caster(Blue)



高级聚氨脂轮
High-class PU caster



超级聚氨脂轮
Super PU caster



高强度人造胶轮(平边)
High-strength artificial rubber caster(Flat)

规格 Size	编号 Code No. / 带方向锁定活动 Swivel w/direction lock	轮径 Wheel dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia. (mm)
4"	EH13-11-100ST-207	100	50	280	耐力(蓝色) Endurant(Blue)	滚珠 Ball bearing	145	80	114X100	84X71	11
	EH13-11-100ST-302			280	高级聚氨脂 High-class polyurethane						
	EH13-11-100ST-304			280	超级聚氨脂 Super polyurethane						
	EH13-11-100ST-502			160	高强度人造胶(平边) High-strength artificial rubber(Flat)						
5"	EH13-11-125ST-207	125	50	350	耐力(蓝色) Endurant(Blue)	滚珠 Ball bearing	166	96	114X100	84X71	11
	EH13-11-125ST-302			350	高级聚氨脂 High-class polyurethane						
	EH13-11-125ST-304			350	超级聚氨脂 Super polyurethane						
	EH13-11-125ST-502			180	高强度人造胶(平边) High-strength artificial rubber(Flat)						
6"	EH13-11-150ST-207	150	50	410	耐力(蓝色) Endurant(Blue)	滚珠 Ball bearing	192	115	114X100	84X71	11
	EH13-11-150ST-302			410	高级聚氨脂 High-class polyurethane						
	EH13-11-150ST-304			410	超级聚氨脂 Super polyurethane						
	EH13-11-150ST-502			280	高强度人造胶(平边) High-strength artificial rubber(Flat)						
8"	EH13-11-200ST-207	200	50	420	耐力(蓝色) Endurant(Blue)	滚珠 Ball bearing	243	150	114X100	84X71	11
	EH13-11-200ST-302			420	高级聚氨脂 High-class polyurethane						
	EH13-11-200ST-304			420	超级聚氨脂 Super polyurethane						
	EH13-11-200ST-502			310	高强度人造胶(平边) High-strength artificial rubber(Flat)						



耐力轮(蓝色)
Endurant caster(Blue)



高级聚氨脂轮
High-class PU caster



超级聚氨脂轮
Super PU caster



高强度人造胶轮(平边)
High-strength artificial rubber caster(Flat)

规格 Size	编号 Code No. / 带方向锁定抗冲击活动 Swivel w/direction lock shock resistance	轮径 Wheel dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia. (mm)
4"	EH14-11-100VT-207	100	50	280	耐力(蓝色) Endurant(Blue)	滚珠 Ball bearing	147	82	114X100	84X71	11
	EH14-11-100VT-302			280	高级聚氨脂 High-class polyurethane						
	EH14-11-100VT-304			280	超级聚氨脂 Super polyurethane						
	EH14-11-100VT-502			160	高强度人造胶(平边) High-strength artificial rubber(Flat)						
5"	EH14-11-125VT-207	125	50	350	耐力(蓝色) Endurant(Blue)	滚珠 Ball bearing	168	102	114X100	84X71	11
	EH14-11-125VT-302			350	高级聚氨脂 High-class polyurethane						
	EH14-11-125VT-304			350	超级聚氨脂 Super polyurethane						
	EH14-11-125VT-502			180	高强度人造胶(平边) High-strength artificial rubber(Flat)						
6"	EH14-11-150VT-207	150	50	410	耐力(蓝色) Endurant(Blue)	滚珠 Ball bearing	195	115	114X100	84X71	11
	EH14-11-150VT-302			410	高级聚氨脂 High-class polyurethane						
	EH14-11-150VT-304			410	超级聚氨脂 Super polyurethane						
	EH14-11-150VT-502			280	高强度人造胶(平边) High-strength artificial rubber(Flat)						
8"	EH14-11-200VT-207	200	50	420	耐力(蓝色) Endurant(Blue)	滚珠 Ball bearing	244	155	114X100	84X71	11
	EH14-11-200VT-302			420	高级聚氨脂 High-class polyurethane						
	EH14-11-200VT-304			420	超级聚氨脂 Super polyurethane						
	EH14-11-200VT-502			310	高强度人造胶(平边) High-strength artificial rubber(Flat)						

EH15系列-插杆型(镀锌) EH15 Series-Solid stem type(Zinc-plating)



插杆金属双刹高级聚氨脂轮
Solid stem w/metal dual brake high-class PU caster



插杆金属双刹超级聚氨脂轮
Solid stem w/metal dual brake super PU caster



插杆金属双刹铁芯聚氨脂轮
Solid stem w/metal dual brake iron core PU caster

规格 Size	编号 Code No. 插杆金属双刹 Solid stem w/metal dual brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	插杆孔径 Hole size (mm)	插杆规格 Stem size (mm)
6"	EH15-11-150HB-302	150	50	410	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	187	144	13	100X35
	EH15-11-150HB-304			410	超级聚氨脂 Super polyurethane					
	EH15-11-150HB-402			410	铁芯聚氨脂 Iron core polyurethane					
8"	EH15-11-200HB-302	200	50	420	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	238	153	13	100X35
	EH15-11-200HB-304			420	超级聚氨脂 Super polyurethane					
	EH15-11-200HB-402			420	铁芯聚氨脂 Iron core polyurethane					

EH16系列-平底型-活动式/固定式(镀锌) EH16 Series-Top plate type-Swivel/Rigid(Zinc-plating)



活动
Swivel



固定
Rigid



金属双刹活动
Swivel w/metal dual brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	金属双刹活动 Metal dual brake	轮径 Wheel dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	金属双刹转动半径 Dual brake radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia. (mm)
8"	EH16-11-200S-303	EH16-11-200R-303	EH16-11-200SB-303	200	65	650	超级聚氨脂 Super polyurethane	滚珠 Ball bearing	260	157	157	168X120	130X75	13. 5



防震活动
Shock absorbing swivel



防震固定
Shock absorbing rigid

规格 Size	编号 Code No. 活动 Swivel	编号 Code No. 固定 Rigid	轮径 Wheel dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia. (mm)	弹簧预张力 Pretension of spring (kg)	弹簧极限张力 Ultimate tension of spring (kg)	弹簧行程 Spring Distance (mm)
5"	EH19-17-125LS-401	EH19-17-125LR-401	125	48	300	铁芯聚氨脂（红色） Iron core polyurethane(Red)	滚珠 Ball bearing	208	115	140X110	105X78	13	50	300	10
	EH19-17-125LS-403	EH19-17-125LR-403			300	铁芯聚氨脂（黄色） Iron core polyurethane(Yellow)									
	EH19-17-125LS-410	EH19-17-125LR-410			300	铁芯聚氨脂（白色） Iron core polyurethane(White)									
	EH19-17-125LS-606	EH19-17-125LR-606		50	300	尼龙芯高级橡胶 Nylon core high-class rubber									
	EH19-17-125LS-608	EH19-17-125LR-608			300	尼龙芯超静橡胶 Nylon core super muting rubber									
	EH19-17-125LS-614	EH19-17-125LR-614			300	铝芯橡胶 Aluminium core rubber									
6"	EH19-17-150LS-401	EH19-17-150LR-401	150	48	350	铁芯聚氨脂（红色） Iron core polyurethane(Red)	滚珠 Ball bearing	221	126	140X110	105X78	13	50	350	10
	EH19-17-150LS-403	EH19-17-150LR-403			350	铁芯聚氨脂（黄色） Iron core polyurethane(Yellow)									
	EH19-17-150LS-410	EH19-17-150LR-410			350	铁芯聚氨脂（白色） Iron core polyurethane(White)									
	EH19-17-150LS-606	EH19-17-150LR-606		50	350	尼龙芯高级橡胶 Nylon core high-class rubber									
	EH19-17-150LS-608	EH19-17-150LR-608			350	尼龙芯超静橡胶 Nylon core super muting rubber									
	EH19-17-150LS-614	EH19-17-150LR-614			350	铝芯橡胶 Aluminium core rubber									
8"	EH19-17-200LS-401	EH19-17-200LR-401	200	48	400	铁芯聚氨脂（红色） Iron core polyurethane(Red)	滚珠 Ball bearing	258	157	140X110	105X78	13	50	400	10
	EH19-17-200LS-403	EH19-17-200LR-403			400	铁芯聚氨脂（黄色） Iron core polyurethane(Yellow)									
	EH19-17-200LS-410	EH19-17-200LR-410			400	铁芯聚氨脂（白色） Iron core polyurethane(White)									
	EH19-17-200LS-606	EH19-17-200LR-606		50	400	尼龙芯高级橡胶 Nylon core high-class rubber									
	EH19-17-200LS-608	EH19-17-200LR-608			400	尼龙芯超静橡胶 Nylon core super muting rubber									
	EH19-17-200LS-614	EH19-17-200LR-614			400	铝芯橡胶 Aluminium core rubber									



铁芯聚氨脂轮（红色）
Iron core PU caster(Red)



铁芯聚氨脂（黄色）
Iron core PU caster(Yellow)



铁芯聚氨脂（白色）
Iron core PU caster(White)



尼龙芯高级橡胶轮
Nylon core high-class rubber caster



尼龙芯超静橡胶轮
Nylon core super muting rubber caster



铝芯橡胶轮
Aluminium core rubber caster



防震刹制活动
Shock absorbing swivel with brake



防震刹制固定
Shock absorbing rigid with brake

规格 Size	编号 Code No. 刹制活动 Swivel with brake	刹制固定 Rigid with brake	轮径 Wheel dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	单刹转动半径 Swivel radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia. (mm)	弹簧预张力 Pretension of spring (kg)	弹簧极限张力 Ultimate tension of spring (kg)	弹簧行程 Spring Distance (mm)
5"	EH19-17-125LE-401	EH19-17-125LF-401	125	48	300	铁芯聚氨脂（红色） Iron core polyurethane(Red)	滚珠 Ball bearing	208	155	140X110	105X78	13	50	300	10
	EH19-17-125LE-403	EH19-17-125LF-403			300	铁芯聚氨脂（黄色） Iron core polyurethane(Yellow)									
	EH19-17-125LE-410	EH19-17-125LF-410			300	铁芯聚氨脂（白色） Iron core polyurethane(White)									
	EH19-17-125LE-606	EH19-17-125LF-606		50	300	尼龙芯高级橡胶 Nylon core high-class rubber									
	EH19-17-125LE-608	EH19-17-125LF-608			300	尼龙芯超静橡胶 Nylon core super muting rubber									
	EH19-17-125LE-614	EH19-17-125LF-614			300	铝芯橡胶 Aluminium core rubber									
6"	EH19-17-150LE-401	EH19-17-150LF-401	150	48	350	铁芯聚氨脂（红色） Iron core polyurethane(Red)	滚珠 Ball bearing	221	156	140X110	105X78	13	50	350	10
	EH19-17-150LE-403	EH19-17-150LF-403			350	铁芯聚氨脂（黄色） Iron core polyurethane(Yellow)									
	EH19-17-150LE-410	EH19-17-150LF-410			350	铁芯聚氨脂（白色） Iron core polyurethane(White)									
	EH19-17-150LE-606	EH19-17-150LF-606		50	350	尼龙芯高级橡胶 Nylon core high-class rubber									
	EH19-17-150LE-608	EH19-17-150LF-608			350	尼龙芯超静橡胶 Nylon core super muting rubber									
	EH19-17-150LE-614	EH19-17-150LF-614			350	铝芯橡胶 Aluminium core rubber									
8"	EH19-17-200LE-401	EH19-17-200LF-401	200	48	400	铁芯聚氨脂（红色） Iron core polyurethane(Red)	滚珠 Ball bearing	258	190	140X110	105X78	13	50	400	10
	EH19-17-200LE-403	EH19-17-200LF-403			400	铁芯聚氨脂（黄色） Iron core polyurethane(Yellow)									
	EH19-17-200LE-410	EH19-17-200LF-410			400	铁芯聚氨脂（白色） Iron core polyurethane(White)									
	EH19-17-200LE-606	EH19-17-200LF-606		50	400	尼龙芯高级橡胶 Nylon core high-class rubber									
	EH19-17-200LE-608	EH19-17-200LF-608			400	尼龙芯超静橡胶 Nylon core super muting rubber									
	EH19-17-200LE-614	EH19-17-200LF-614			400	铝芯橡胶 Aluminium core rubber									



铁芯聚氨脂轮（红色）
Iron core PU caster(Red)



铁芯聚氨脂（黄色）
Iron core PU caster(Yellow)



铁芯聚氨脂（白色）
Iron core PU caster(White)



尼龙芯高级橡胶轮
Nylon core high-class rubber caster



尼龙芯超静橡胶轮
Nylon core super muting rubber caster



铝芯橡胶轮
Aluminium core rubber caster



活动
Swivel



固定
Rigid



金属双刹活动
Swivel w/metal dual brake



边刹活动
Swivel w/side brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	金属双刹活动 Metal dual brake	边刹活动 Swivel w/side brake	轮径 Wheel dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	金属双刹转动半径 Dual brake radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia. (mm)
4"	EH20-61-100S-211	EH20-61-100R-211	EH20-61-100SB-211	EH20-61-100SC-211	100	50	280	耐力(白色) Endurant(White)	特尔灵 Derlin bearing	145	80	122	114X100	84X71	11
	EH20-61-100S-302	EH20-61-100R-302	EH20-61-100SB-302	EH20-61-100SC-302			280	高级聚氨脂 High-class polyurethane							
	EH20-61-100S-304	EH20-61-100R-304	EH20-61-100SB-304	EH20-61-100SC-304			280	超级聚氨脂 Super polyurethane							
5"	EH20-61-125S-211	EH20-61-125R-211	EH20-61-125SB-211	EH20-61-125SC-211	125	50	350	耐力(白色) Endurant(White)	特尔灵 Derlin bearing	166	96	122	114X100	84X71	11
	EH20-61-125S-302	EH20-61-125R-302	EH20-61-125SB-302	EH20-61-125SC-302			350	高级聚氨脂 High-class polyurethane							
	EH20-61-125S-304	EH20-61-125R-304	EH20-61-125SB-304	EH20-61-125SC-304			350	超级聚氨脂 Super polyurethane							
6"	EH20-61-150S-211	EH20-61-150R-211	EH20-61-150SB-211	EH20-61-150SC-211	150	50	410	耐力(白色) Endurant(White)	特尔灵 Derlin bearing	192	115	144	114X100	84X71	11
	EH20-61-150S-302	EH20-61-150R-302	EH20-61-150SB-302	EH20-61-150SC-302			410	高级聚氨脂 High-class polyurethane							
	EH20-61-150S-304	EH20-61-150R-304	EH20-61-150SB-304	EH20-61-150SC-304			410	超级聚氨脂 Super polyurethane							
8"	EH20-61-200S-211	EH20-61-200R-211	EH20-61-200SB-211	EH20-61-200SC-211	200	50	420	耐力(白色) Endurant(White)	特尔灵 Derlin bearing	243	150	151	114X100	84X71	11
	EH20-61-200S-302	EH20-61-200R-302	EH20-61-200SB-302	EH20-61-200SC-302			420	高级聚氨脂 High-class polyurethane							
	EH20-61-200S-304	EH20-61-200R-304	EH20-61-200SB-304	EH20-61-200SC-304			420	超级聚氨脂 Super polyurethane							



耐力轮(白色)
Endurant caster (White)



高级聚氨脂轮
High-class PU caster



超级聚氨脂轮
Super PU caster



不锈钢活动
Stainless steel swivel



不锈钢固定
Stainless steel rigid



不锈钢双刹活动
Stainless steel dual brake

规格 Size	编号 Code No.				轮径 Wheel dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	金属双刹转动半径 Dual brake radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia. (mm)
	活动 Swivel	固定 Rigid	金属双刹活动 Metal dual brake	边刹活动 Swivel w/side brake											
4"	EH21-66-100S-211	EH21-66-100R-211	EH21-66-100SB-211	EH21-66-100SC-211	100	50	280	耐力(白色) Endurant(White)	特尔灵 Derlin bearing	145	80	122	114X100	84X71	11
	EH21-66-100S-302	EH21-66-100R-302	EH21-66-100SB-302	EH21-66-100SC-302			280	高级聚氨脂 High-class polyurethane							
	EH21-66-100S-304	EH21-66-100R-304	EH21-66-100SB-304	EH21-66-100SC-304			280	超级聚氨脂 Super polyurethane							
	EH21-66-100S-502	EH21-66-100R-502	EH21-66-100SB-502	EH21-66-100SC-502			160	高强度人造胶(平边) High-strength artificial rubber(Flat)							
5"	EH21-66-125S-211	EH21-66-125R-211	EH21-66-125SB-211	EH21-66-125SC-211	125	50	350	耐力(白色) Endurant(White)	特尔灵 Derlin bearing	166	96	122	114X100	84X71	11
	EH21-66-125S-302	EH21-66-125R-302	EH21-66-125SB-302	EH21-66-125SC-302			350	高级聚氨脂 High-class polyurethane							
	EH21-66-125S-304	EH21-66-125R-304	EH21-66-125SB-304	EH21-66-125SC-304			350	超级聚氨脂 Super polyurethane							
	EH21-66-125S-502	EH21-66-125R-502	EH21-66-125SB-502	EH21-66-125SC-502			180	高强度人造胶(平边) High-strength artificial rubber(Flat)							
6"	EH21-66-150S-211	EH21-66-150R-211	EH21-66-150SB-211	EH21-66-150SC-211	150	50	410	耐力(白色) Endurant(White)	特尔灵 Derlin bearing	192	115	144	114X100	84X71	11
	EH21-66-150S-302	EH21-66-150R-302	EH21-66-150SB-302	EH21-66-150SC-302			410	高级聚氨脂 High-class polyurethane							
	EH21-66-150S-304	EH21-66-150R-304	EH21-66-150SB-304	EH21-66-150SC-304			410	超级聚氨脂 Super polyurethane							
	EH21-66-150S-502	EH21-66-150R-502	EH21-66-150SB-502	EH21-66-150SC-502			280	高强度人造胶(平边) High-strength artificial rubber(Flat)							
8"	EH21-66-200S-211	EH21-66-200R-211	EH21-66-200SB-211	EH21-66-200SC-211	200	50	420	耐力(白色) Endurant(White)	特尔灵 Derlin bearing	243	150	151	114X100	84X71	11
	EH21-66-200S-302	EH21-66-200R-302	EH21-66-200SB-302	EH21-66-200SC-302			420	高级聚氨脂 High-class polyurethane							
	EH21-66-200S-304	EH21-66-200R-304	EH21-66-200SB-304	EH21-66-200SC-304			420	超级聚氨脂 Super polyurethane							
	EH21-66-200S-502	EH21-66-200R-502	EH21-66-200SB-502	EH21-66-200SC-502			310	高强度人造胶(平边) High-strength artificial rubber(Flat)							



耐力轮(白色)
Endurant caster (White)



高级聚氨脂轮
High-class PU caster



超级聚氨脂轮
Super PU caster



高强度人造胶轮(平边)
High-strength artificial rubber caster(Flat)



防缠活动
The winding swivel



防缠固定
The winding rigid

规格 Size	编号 Code No.		轮径 Wheel dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia. (mm)
	防缠活动 The winding swivel	防缠固定 The winding rigid										
6"	EH22-11-150S-302	EH22-11-150R-302	150	50	410	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	192	115	114X100	84X71	11
	EH22-11-150S-304	EH22-11-150R-304			410	超级聚氨脂 Super polyurethane						
	EH22-11-150S-313	EH22-11-150R-313			410	烽火聚氨脂 Fenghuo polyurethane						
8"	EH22-11-200S-302	EH22-11-200R-302	200	50	420	高级聚氨脂 High-class polyurethane	滚珠 Ball bearing	243	150	114X100	84X71	11
	EH22-11-200S-304	EH22-11-200R-304			420	超级聚氨脂 Super polyurethane						
	EH22-11-200S-313	EH22-11-200R-313			420	烽火聚氨脂 Fenghuo polyurethane						



防缠高级聚氨脂轮
The winding high-class PU caster



防缠超级聚氨脂轮
The winding super PU caster



防缠烽火聚氨脂轮
The winding fenghuo PU caster



防缠活动
The winding swivel



防缠固定
The winding rigid

规格 Size	编号 Code No.		轮径 Wheel dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia. (mm)
	防缠活动 The winding swivel	防缠固定 The winding rigid										
6"	EH23-11-150S-207	EH23-11-150R-207	150	50	410	耐力(蓝色) Endurant(Bule)	滚珠 Ball bearing	192	115	114X100	84X71	11
	EH23-11-150S-301	EH23-11-150R-301			300	高级聚氨脂 High-class polyurethane						
	EH23-11-150S-303	EH23-11-150R-303			300	超级聚氨脂 Super polyurethane						
	EH23-11-150S-401	EH23-11-150R-401			410	铁芯聚氨脂 Iron core Polyurethane						
8"	EH23-11-200S-207	EH23-11-200R-207	200	50	420	耐力(蓝色) Endurant(Bule)	滚珠 Ball bearing	243	150	114X100	84X71	11
	EH23-11-200S-301	EH23-11-200R-301			350	高级聚氨脂 High-class polyurethane						
	EH23-11-200S-303	EH23-11-200R-303			350	超级聚氨脂 Super polyurethane						
	EH23-11-200S-401	EH23-11-200R-401			420	铁芯聚氨脂 Iron core Polyurethane						



防缠耐力轮(蓝色)
The winding endurant caster(Bule)



防缠高级聚氨脂轮
The winding high-class PU caster



防缠超级聚氨脂轮
The winding super PU caster



防缠铁芯聚氨脂轮
The winding iron core PU caster

EK1-5系列脚轮 EK1-5 series caster

環球脚輪
GLOBE CASTER

轮径 100-300mm Wheel diameter 100-300mm

承载 300-2000kg Load capacity 300-2000kg










高强度尼龙轮
High-strength nylon wheel


超级聚氨脂轮
Super PU wheel


铁芯聚氨脂轮
Iron core PU wheel


铸铁轮
Cast iron wheel


铝芯橡胶轮
Aluminium core rubber wheel


铁芯聚氨脂轮(红色)
Iron core PU wheel(Red)


铁芯聚氨脂轮(黄色)
Iron core PU wheel(Yellow)


铁芯聚氨脂轮(白色)
Iron core PU wheel(White)


尼龙芯高级橡胶轮
Nylon core high-class rubber wheel


尼龙芯超静橡胶轮
Nylon core super muting rubber wheel

EK1系列-平底型-活动式/固定式(焗漆) EK1 Series-Top plate type-Swivel/Rigid(Baking finish)



活动
Swivel



固定
Rigid



双刹活动
Swivel w/dual brake

规格 Size	编号 Code No.			轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
	活动 Swivel	固定 Rigid	双刹活动 Swivel w/dual brake											
4"	EK01-17-100S-304	EK01-17-100R-304	EK01-17-100SA-304	100	50	350	超级聚氨脂 Super polyurethane	滚珠 Ball bearing	149	82	152	140X110	110X75	13
	EK01-17-100S-402	EK01-17-100R-402	EK01-17-100SA-402			350	铁芯聚氨脂 Iron core Polyurethane							
	EK01-17-100S-103	EK01-17-100R-103	EK01-17-100SA-103			400	高强度尼龙 High-strength nylon							
	EK01-17-100S-701	EK01-17-100R-701	EK01-17-100SA-701			400	铸铁 Cast iron							
5"	EK01-17-125S-304	EK01-17-125R-304	EK01-17-125SA-304	125	50	400	超级聚氨脂 Super polyurethane	滚珠 Ball bearing	173	98	160	140X110	110X75	13
	EK01-17-125S-402	EK01-17-125R-402	EK01-17-125SA-402			400	铁芯聚氨脂 Iron core Polyurethane							
	EK01-17-125S-103	EK01-17-125R-103	EK01-17-125SA-103			600	高强度尼龙 High-strength nylon							
	EK01-17-125S-701	EK01-17-125R-701	EK01-17-125SA-701			600	铸铁 Cast iron							
6"	EK01-17-150S-304	EK01-17-150R-304	EK01-17-150SA-304	150	50	500	超级聚氨脂 Super polyurethane	滚珠 Ball bearing	199	113	180	140X110	110X75	13
	EK01-17-150S-402	EK01-17-150R-402	EK01-17-150SA-402			500	铁芯聚氨脂 Iron core Polyurethane							
	EK01-17-150S-103	EK01-17-150R-103	EK01-17-150SA-103			800	高强度尼龙 High-strength nylon							
	EK01-17-150S-701	EK01-17-150R-701	EK01-17-150SA-701			800	铸铁 Cast iron							
8"	EK01-17-200S-304	EK01-17-200R-304	EK01-17-200SA-304	200	50	650	超级聚氨脂 Super polyurethane	滚珠 Ball bearing	250	147	183	140X110	110X75	13
	EK01-17-200S-402	EK01-17-200R-402	EK01-17-200SA-402			650	铁芯聚氨脂 Iron core Polyurethane							
	EK01-17-200S-103	EK01-17-200R-103	EK01-17-200SA-103			1000	高强度尼龙 High-strength nylon							
	EK01-17-200S-701	EK01-17-200R-701	EK01-17-200SA-701			1000	铸铁 Cast iron							
10"	EK01-17-250S-304	EK01-17-250R-304	EK01-17-250SA-304	250	64	1200	超级聚氨脂 Super polyurethane	滚珠 Ball bearing	298	193	256	180X140	150X100	13
	EK01-17-250S-402	EK01-17-250R-402	EK01-17-250SA-402			1200	铁芯聚氨脂 Iron core Polyurethane							
	EK01-17-250S-103	EK01-17-250R-103	EK01-17-250SA-103			1500	高强度尼龙 High-strength nylon							
	EK01-17-250S-701	EK01-17-250R-701	EK01-17-250SA-701			1500	铸铁 Cast iron							
12"	EK01-17-300S-304	EK01-17-300R-304	EK01-17-300SA-304	300	64	1500	超级聚氨脂 Super polyurethane	滚珠 Ball bearing	348	224	276	180X140	150X100	13
	EK01-17-300S-402	EK01-17-300R-402	EK01-17-300SA-402			1500	铁芯聚氨脂 Iron core Polyurethane							
	EK01-17-300S-103	EK01-17-300R-103	EK01-17-300SA-103			2000	高强度尼龙 High-strength nylon							
	EK01-17-300S-701	EK01-17-300R-701	EK01-17-300SA-701			2000	铸铁 Cast iron							



超级聚氨脂轮
Super PU caster



铁芯聚氨脂轮
Iron core PU caster



高强度尼龙轮
High-strength nylon caster



铸铁轮
Cast iron caster



活动
Swivel



固定
Rigid



双刹活动
Swivel w/dual brake

规格 Size	编号 Code No. 活动 Swivel	固定 Rigid	双刹活动 Swivel w/dual brake	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	双刹转动半径 Dual brake radius (mm)	底板规格 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole Dia. (mm)
4"	EK02-17-100S-401	EK02-17-100R-401	EK02-17-100SA-401	100	48	250	铁芯聚氨脂(红色) Iron core polyurethane(Red)	滚珠 Ball bearing	149	82	152	140X110	110X75	13
	EK02-17-100S-403	EK02-17-100R-403	EK02-17-100SA-403			250	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)							
	EK02-17-100S-410	EK02-17-100R-410	EK02-17-100SA-410			250	铁芯聚氨脂(白色) Iron core polyurethane(White)							
	EK02-17-100S-606	EK02-17-100R-606	EK02-17-100SA-606		50	250	尼龙芯高级橡胶 Nylon core high-class rubber							
	EK02-17-100S-608	EK02-17-100R-608	EK02-17-100SA-608			250	尼龙芯超静橡胶 Nylon core super muting rubber							
	EK02-17-100S-614	EK02-17-100R-614	EK02-17-100SA-614			250	铝芯橡胶 Aluminium core rubber							
5"	EK02-17-125S-401	EK02-17-125R-401	EK02-17-125SA-401	125	48	300	铁芯聚氨脂(红色) Iron core polyurethane(Red)	滚珠 Ball bearing	173	98	160	140X110	110X75	13
	EK02-17-125S-403	EK02-17-125R-403	EK02-17-125SA-403			300	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)							
	EK02-17-125S-410	EK02-17-125R-410	EK02-17-125SA-410			300	铁芯聚氨脂(白色) Iron core polyurethane(White)							
	EK02-17-125S-606	EK02-17-125R-606	EK02-17-125SA-606		50	300	尼龙芯高级橡胶 Nylon core high-class rubber							
	EK02-17-125S-608	EK02-17-125R-608	EK02-17-125SA-608			300	尼龙芯超静橡胶 Nylon core super muting rubber							
	EK02-17-125S-614	EK02-17-125R-614	EK02-17-125SA-614			300	铝芯橡胶 Aluminium core rubber							
6"	EK02-17-150S-401	EK02-17-150R-401	EK02-17-150SA-401	150	48	350	铁芯聚氨脂(红色) Iron core polyurethane(Red)	滚珠 Ball bearing	199	113	180	140X110	110X75	13
	EK02-17-150S-403	EK02-17-150R-403	EK02-17-150SA-403			350	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)							
	EK02-17-150S-410	EK02-17-150R-410	EK02-17-150SA-410			350	铁芯聚氨脂(白色) Iron core polyurethane(White)							
	EK02-17-150S-606	EK02-17-150R-606	EK02-17-150SA-606		50	350	尼龙芯高级橡胶 Nylon core high-class rubber							
	EK02-17-150S-608	EK02-17-150R-608	EK02-17-150SA-608			350	尼龙芯超静橡胶 Nylon core super muting rubber							
	EK02-17-150S-614	EK02-17-150R-614	EK02-17-150SA-614			350	铝芯橡胶 Aluminium core rubber							
8"	EK02-17-200S-401	EK02-17-200R-401	EK02-17-200SA-401	200	48	400	铁芯聚氨脂(红色) Iron core polyurethane(Red)	滚珠 Ball bearing	250	147	183	140X110	110X75	13
	EK02-17-200S-403	EK02-17-200R-403	EK02-17-200SA-403			400	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)							
	EK02-17-200S-410	EK02-17-200R-410	EK02-17-200SA-410			400	铁芯聚氨脂(白色) Iron core polyurethane(White)							
	EK02-17-200S-606	EK02-17-200R-606	EK02-17-200SA-606		50	400	尼龙芯高级橡胶 Nylon core high-class rubber							
	EK02-17-200S-608	EK02-17-200R-608	EK02-17-200SA-608			400	尼龙芯超静橡胶 Nylon core super muting rubber							
	EK02-17-200S-614	EK02-17-200R-614	EK02-17-200SA-614			400	铝芯橡胶 Aluminium core rubber							



铁芯聚氨脂轮(红色)
Iron core PU caster(Red)



铁芯聚氨脂(黄色)
Iron core PU caster(Yellow)



铁芯聚氨脂(白色)
Iron core PU caster(White)



尼龙芯高级橡胶轮
Nylon core high-class rubber caster



尼龙芯超静橡胶轮
Nylon core super muting rubber caster



铝芯橡胶轮
Aluminium core rubber caster



防震活动
Shock absorbing swivel



防震固定
Shock absorbing rigid

规格 Size	编号 Code No. 活动 Swivel	编号 Code No. 固定 Rigid	轮径 Wheel dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia. (mm)	弹簧预张力 Pretension of spring (kg)	弹簧极限张力 Ultimate tension of spring (kg)	弹簧行程 Spring Distance (mm)
5"	EK03-17-125LS-401	EK03-17-125LR-401	125	48	300	铁芯聚氨脂(红色) Iron core polyurethane(Red)	滚珠 Ball bearing	208	115	140X110	105X78	13	50	300	10
	EK03-17-125LS-403	EK03-17-125LR-403			300	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)									
	EK03-17-125LS-410	EK03-17-125LR-410			300	铁芯聚氨脂(白色) Iron core polyurethane(White)									
	EK03-17-125LS-606	EK03-17-125LR-606		50	300	尼龙芯高级橡胶 Nylon core high-class rubber									
	EK03-17-125LS-608	EK03-17-125LR-608			300	尼龙芯超静橡胶 Nylon core super muting rubber									
	EK03-17-125LS-614	EK03-17-125LR-614			300	铝芯橡胶 Aluminium core rubber									
6"	EK03-17-150LS-401	EK03-17-150LR-401	150	48	350	铁芯聚氨脂(红色) Iron core polyurethane(Red)	滚珠 Ball bearing	221	126	140X110	105X78	13	50	350	10
	EK03-17-150LS-403	EK03-17-150LR-403			350	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)									
	EK03-17-150LS-410	EK03-17-150LR-410			350	铁芯聚氨脂(白色) Iron core polyurethane(White)									
	EK03-17-150LS-606	EK03-17-150LR-606		50	350	尼龙芯高级橡胶 Nylon core high-class rubber									
	EK03-17-150LS-608	EK03-17-150LR-608			350	尼龙芯超静橡胶 Nylon core super muting rubber									
	EK03-17-150LS-614	EK03-17-150LR-614			350	铝芯橡胶 Aluminium core rubber									
8"	EK03-17-200LS-401	EK03-17-200LR-401	200	48	400	铁芯聚氨脂(红色) Iron core polyurethane(Red)	滚珠 Ball bearing	258	157	140X110	105X78	13	50	400	10
	EK03-17-200LS-403	EK03-17-200LR-403			400	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)									
	EK03-17-200LS-410	EK03-17-200LR-410			400	铁芯聚氨脂(白色) Iron core polyurethane(White)									
	EK03-17-200LS-606	EK03-17-200LR-606		50	400	尼龙芯高级橡胶 Nylon core high-class rubber									
	EK03-17-200LS-608	EK03-17-200LR-608			400	尼龙芯超静橡胶 Nylon core super muting rubber									
	EK03-17-200LS-614	EK03-17-200LR-614			400	铝芯橡胶 Aluminium core rubber									



铁芯聚氨脂轮(红色)
Iron core PU caster(Red)



铁芯聚氨脂(黄色)
Iron core PU caster(Yellow)



铁芯聚氨脂(白色)
Iron core PU caster(White)



尼龙芯高级橡胶轮
Nylon core high-class rubber caster



尼龙芯超静橡胶轮
Nylon core super muting rubber caster



铝芯橡胶轮
Aluminium core rubber caster



防震刹制活动
Shock absorbing swivel with brake



防震刹制固定
Shock absorbing rigid with brake

规格 Size	编号 Code No. 刹制活动 Swivel with brake	刹制固定 Rigid with brake	轮径 Wheel dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia. (mm)	弹簧预张力 Pretension of spring (kg)	弹簧极限张力 Ultimate tension of spring (kg)	弹簧行程 Spring Distance (mm)
5"	EK03-17-125LE-401	EK03-17-125LF-401	125	48	300	铁芯聚氨脂(红色) Iron core polyurethane(Red)	滚珠 Ball bearing	208	157	140X110	105X78	13	50	300	10
	EK03-17-125LE-403	EK03-17-125LF-403			300	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)									
	EK03-17-125LE-410	EK03-17-125LF-410			300	铁芯聚氨脂(白色) Iron core polyurethane(White)									
	EK03-17-125LE-606	EK03-17-125LF-606		50	300	尼龙芯高级橡胶 Nylon core high-class rubber									
	EK03-17-125LE-608	EK03-17-125LF-608			300	尼龙芯超静橡胶 Nylon core super muting rubber									
	EK03-17-125LE-614	EK03-17-125LF-614			300	铝芯橡胶 Aluminium core rubber									
6"	EK03-17-150LE-401	EK03-17-150LF-401	150	48	350	铁芯聚氨脂(红色) Iron core polyurethane(Red)	滚珠 Ball bearing	221	160	140X110	105X78	13	50	350	10
	EK03-17-150LE-403	EK03-17-150LF-403			350	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)									
	EK03-17-150LE-410	EK03-17-150LF-410			350	铁芯聚氨脂(白色) Iron core polyurethane(White)									
	EK03-17-150LE-606	EK03-17-150LF-606		50	350	尼龙芯高级橡胶 Nylon core high-class rubber									
	EK03-17-150LE-608	EK03-17-150LF-608			350	尼龙芯超静橡胶 Nylon core super muting rubber									
	EK03-17-150LE-614	EK03-17-150LF-614			350	铝芯橡胶 Aluminium core rubber									
8"	EK03-17-200LE-401	EK03-17-200LF-401	200	48	400	铁芯聚氨脂(红色) Iron core polyurethane(Red)	滚珠 Ball bearing	258	195	140X110	105X78	13	50	400	10
	EK03-17-200LE-403	EK03-17-200LF-403			400	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)									
	EK03-17-200LE-410	EK03-17-200LF-410			400	铁芯聚氨脂(白色) Iron core polyurethane(White)									
	EK03-17-200LE-606	EK03-17-200LF-606		50	400	尼龙芯高级橡胶 Nylon core high-class rubber									
	EK03-17-200LE-608	EK03-17-200LF-608			400	尼龙芯超静橡胶 Nylon core super muting rubber									
	EK03-17-200LE-614	EK03-17-200LF-614			400	铝芯橡胶 Aluminium core rubber									



铁芯聚氨脂轮(红色)
Iron core PU caster(Red)



铁芯聚氨脂(黄色)
Iron core PU caster(Yellow)



铁芯聚氨脂(白色)
Iron core PU caster(White)



尼龙芯高级橡胶轮
Nylon core high-class rubber caster



尼龙芯超静橡胶轮
Nylon core super muting rubber caster



铝芯橡胶轮
Aluminium core rubber caster



防缠活动
The winding swivel



防缠固定
The winding rigid

规格 Size	编号 Code No.		轮径 Wheel dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	活动转动半径 Swivel radius (mm)	底板 Top plate size (mm)	孔距 Hole spacing (mm)	孔径 Hole dia. (mm)
	防缠活动 The winding swivel	防缠固定 The winding rigid										
6"	EK05-17-150S-103	EK05-17-150R-103	150	50	800	高强度尼龙 High-strength nylon	滚珠 Ball bearing	199	113	140X110	110X75	13
	EK05-17-150S-304	EK05-17-150R-304			500	超级聚氨脂 Super polyurethane						
	EK05-17-150S-402	EK05-17-150R-402			500	铁芯聚氨脂 Iron core Polyurethane						
8"	EK05-17-200S-103	EK05-17-200R-103	200	50	1000	高强度尼龙 High-strength nylon	滚珠 Ball bearing	250	147	140X110	110X75	13
	EK05-17-200S-304	EK05-17-200R-304			650	超级聚氨脂 Super polyurethane						
	EK05-17-200S-402	EK05-17-200R-402			650	铁芯聚氨脂 Iron core Polyurethane						



防缠高强度尼龙轮
The winding high-strength nylon caster



防缠超级聚氨脂轮
The winding super PU caster



防缠铁芯聚氨脂轮
The winding iron core PU caster

EP1-14系列脚轮 EP1-14 series caster

環球脚輪
GLOBE CASTER

轮径 65-125mm Wheel diameter 65-125mm

承载 50-100kg Load capacity 50-100kg





两刀聚氨脂轮（灰色）
Two slices PU wheel(Grey)



两刀聚氨脂轮（红色）
Two slices PU wheel(Red)



三刀聚氨脂轮（灰色）
Three slices PU wheel(Grey)



橡胶轮（灰色）
Rubber wheel(Grey)



高强度聚氨脂轮（蓝色）
High-strength PU wheel(Blue)



超静聚氨脂轮（灰色）
Super muting PU wheel(Grey)



高级聚氨脂轮（黑色）
High-class PU wheel(Black)



超静聚氨脂轮（灰色）
Super muting PU wheel(Grey)



高强度人造胶轮（灰色）
High-strength TPR wheel(Grey)



导电人造胶轮（灰色）
Conductive artificial rubber wheel(Grey)

EP1系列-空心钉活动/固定式两刀电梯轮 EP1 Series-Bolt hole type Swivel/Rigid two slices elevator caster






规格 Size	编号 Code No. 空心钉活动 Bolt hole swivel	空心钉固定 Bolt hole rigid	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	孔径 Hole Dia. (mm)
4"	EP01-11-100PS-315	EP01-11-100PR-315	100	30	50	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	128	95	12
	EP01-11-100PS-316	EP01-11-100PR-316				聚氨脂(红色) Polyurethane (Red)				
5"	EP01-11-125PS-315	EP01-11-125PR-315	125	30	50	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	150	114	12
	EP01-11-125PS-316	EP01-11-125PR-316				聚氨脂(红色) Polyurethane (Red)				

EP1系列-方头丝杆两刀电梯轮 EP1 Series-Square head threaded stem type two slices elevator caster




规格 Size	编号 Code No. 方头丝杆 Square head threaded stem	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	丝杆规格 Threaded stem size (mm)
4"	EP01-11-100M-315	100	30	50	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	128	95	12X14
	EP01-11-100M-316				聚氨脂(红色) Polyurethane (Red)				
5"	EP01-11-125M-315	125	30	50	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	150	114	12X14
	EP01-11-125M-316				聚氨脂(红色) Polyurethane (Red)				

EP1系列-夹板式活动/固定式两刀电梯轮 EP1 Series-Splinting type Swivel/Rigid two slices elevator caster




规格 Size	编号 Code No. 夹板式活动 Splinting type swivel	夹板式固定 Splinting type rigid	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	夹板规格 Splinting size (mm)
4"	EP01-11-100FS-315	EP01-11-100FR-315	100	30	50	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	136	95	10X35
	EP01-11-100FS-316	EP01-11-100FR-316				聚氨脂(红色) Polyurethane (Red)				
5"	EP01-11-125FS-315	EP01-11-125FR-315	125	30	50	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	158	114	10X35
	EP01-11-125FS-316	EP01-11-125FR-316				聚氨脂(红色) Polyurethane (Red)				

EP2系列-空心钉活动/固定式三刀电梯轮 EP2 Series-Bolt hole type Swivel/Rigid three slices elevator caster





规格 Size	编号 Code No.		轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	孔径 Hole Dia. (mm)
	空心钉活动 Bolt hole swivel	空心钉固定 Bolt hole rigid								
4"	EP02-11-100PS-317	EP02-11-100PR-317	100	22	50	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	136	92	12
5"	EP02-11-125PS-317	EP02-11-125PR-317	125	22	70	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	160	106	12

EP2系列-方头丝杆三刀电梯轮 EP2 Series-Square head threaded stem type three slices elevator caster



规格 Size	编号 Code No.	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	丝杆规格 Threaded stem size (mm)
	方头丝杆 Square head threaded stem								
4"	EP02-11-100M-317	100	22	50	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	136	92	12X14
5"	EP02-11-125M-317	125	22	70	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	160	106	12X14

EP2系列-夹板活动/固定式三刀电梯轮 EP2 Series-Splinting type Swivel/Rigid three slices elevator caster



规格 Size	编号 Code No.		轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	夹板规格 Splinting size (mm)
	夹板式活动 Splinting type swivel	夹板式固定 Splinting type rigid								
4"	EP02-11-100FS-317	EP02-11-100FR-317	100	22	50	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	142	92	10X35
5"	EP02-11-125FS-317	EP02-11-125FR-317	125	22	70	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	172	106	10X35

EP4系列-空心钉活动/固定式 EP4 Series-Bolt hole type Swivel/Rigid






规格 Size	编号 Code No. 空心钉活动 Bolt hole swivel	空心钉固定 Bolt hole rigid	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	孔径 Hole Dia. (mm)
4"	EP04-11-100PS-623	EP04-11-100PR-623	100	30	80	橡胶(灰色) Rubber (Grey)	滚珠 Ball bearing	133	90	12
	EP04-11-100PS-501	EP04-11-100PR-501				高强度人造胶(灰色) High-strength artificial rubber (Grey)				
5"	EP04-11-125PS-623	EP04-11-125PR-623	125	30	100	橡胶(灰色) Rubber (Grey)	滚珠 Ball bearing	158	104	12
	EP04-11-125PS-501	EP04-11-125PR-501				高强度人造胶(灰色) High-strength artificial rubber (Grey)				

EP4系列-方头丝杆式 EP4 Series-Square head threaded stem type




规格 Size	编号 Code No. 方头丝杆 Square head threaded stem	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	丝杆规格 Threaded stem size (mm)
4"	EP04-11-100M-623	100	30	80	橡胶(灰色) Rubber (Grey)	滚珠 Ball bearing	133	90	12X14
	EP04-11-100M-501				高强度人造胶(灰色) High-strength artificial rubber (Grey)				
5"	EP04-11-125M-623	125	30	100	橡胶(灰色) Rubber (Grey)	滚珠 Ball bearing	158	104	12X14
	EP04-11-125M-501				高强度人造胶(灰色) High-strength artificial rubber (Grey)				

EP4系列-夹板活动/固定式 EP4 Series-Splinting type Swivel/Rigid




规格 Size	编号 Code No. 夹板式活动 Splinting type swivel	夹板式固定 Splinting type rigid	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	夹板规格 Splinting size (mm)
4"	EP04-11-100FS-623	EP04-11-100FR-623	100	30	80	橡胶(灰色) Rubber(Grey)	滚珠 Ball bearing	139	90	10X35
	EP04-11-100FS-501	EP04-11-100FR-501				高强度人造胶(灰色) High-strength artificial rubber(Grey)				
5"	EP04-11-125FS-623	EP04-11-125FR-623	125	30	100	橡胶(灰色) Rubber(Grey)	滚珠 Ball bearing	164	104	10X35
	EP04-11-125FS-501	EP04-11-125FR-501				高强度人造胶(灰色) High-strength artificial rubber(Grey)				

EP5系列-空心钉活动式聚氨脂轮 EP5 Series-Bolt hole type swivel polyurethane caster





规格 Size	编号 Code No. / 空心钉活动 Bolt hole swivel	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	孔径 Hole Dia. (mm)
3"	EP05-11-075PS-308	75	28	60	高强度聚氨脂(蓝色) High-strength polyurethane (Blue)	滚珠 Ball bearing	106	76	12
	EP05-11-075PS-306				超静聚氨脂(灰色) Super muting polyurethane (Grey)				
4"	EP05-11-100PS-308	100	28	80	高强度聚氨脂(蓝色) High-strength polyurethane (Blue)	滚珠 Ball bearing	132	92	12
	EP05-11-100PS-306				超静聚氨脂(灰色) Super muting polyurethane (Grey)				
5"	EP05-11-125PS-308	125	30	100	高强度聚氨脂(蓝色) High-strength polyurethane (Blue)	滚珠 Ball bearing	157	106	12
	EP05-11-125PS-306				超静聚氨脂(灰色) Super muting polyurethane (Grey)				

EP5系列-空心钉固定式聚氨脂轮 EP5 Series-Bolt hole type rigid polyurethane caster





规格 Size	编号 Code No. / 空心钉固定 Bolt hole rigid	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	孔径 Hole Dia. (mm)
3"	EP05-11-075PR-308	75	28	60	高强度聚氨脂(蓝色) High-strength polyurethane (Blue)	滚珠 Ball bearing	106	76	12
	EP05-11-075PR-306				超静聚氨脂(灰色) Super muting polyurethane (Grey)				
4"	EP05-11-100PR-308	100	28	80	高强度聚氨脂(蓝色) High-strength polyurethane (Blue)	滚珠 Ball bearing	132	92	12
	EP05-11-100PR-306				超静聚氨脂(灰色) Super muting polyurethane (Grey)				
5"	EP05-11-125PR-308	125	30	100	高强度聚氨脂(蓝色) High-strength polyurethane (Blue)	滚珠 Ball bearing	157	106	12
	EP05-11-125PR-306				超静聚氨脂(灰色) Super muting polyurethane (Grey)				

EP5系列-方头丝杆聚氨脂轮 EP5 Series-Square head threaded stem type polyurethane caster





规格 Size	编号 Code No. 方头丝杆 Square head threaded stem	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	丝杆规格 Threaded stem size (mm)
3"	EP05-11-075M-308	75	28	60	高强度聚氨脂(蓝色) High-strength polyurethane (Blue)	滚珠 Ball bearing	106	76	12X14
	EP05-11-075M-306				超静聚氨脂(灰色) Super muting polyurethane (Grey)				
4"	EP05-11-100M-308	100	28	80	高强度聚氨脂(蓝色) High-strength polyurethane (Blue)	滚珠 Ball bearing	132	92	12X14
	EP05-11-100M-306				超静聚氨脂(灰色) Super muting polyurethane (Grey)				
5"	EP05-11-125M-308	125	30	100	高强度聚氨脂(蓝色) High-strength polyurethane (Blue)	滚珠 Ball bearing	157	106	12X14
	EP05-11-125M-306				超静聚氨脂(灰色) Super muting polyurethane (Grey)				

EP5系列-夹板活动/固定式聚氨脂轮 EP5 Series-Splinting type Swivel/Rigid polyurethane caster





规格 Size	编号 Code No. 夹板式活动 Splinting type swivel	夹板式固定 Splinting type rigid	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	夹板规格 Splinting size (mm)
3"	EP05-11-075FS-308	EP05-11-075FR-308	75	28	60	高强度聚氨脂(蓝色) High-strength polyurethane (Blue)	滚珠 Ball bearing	112	76	10X35
	EP05-11-075FS-306	EP05-11-075FR-306				超静聚氨脂(灰色) Super muting polyurethane (Grey)				
4"	EP05-11-100FS-308	EP05-11-100FR-308	100	28	80	高强度聚氨脂(蓝色) High-strength polyurethane (Blue)	滚珠 Ball bearing	138	92	10X35
	EP05-11-100FS-306	EP05-11-100FR-306				超静聚氨脂(灰色) Super muting polyurethane (Grey)				
5"	EP05-11-125FS-308	EP05-11-125FR-308	125	30	100	高强度聚氨脂(蓝色) High-strength polyurethane (Blue)	滚珠 Ball bearing	163	106	10X35
	EP05-11-125FS-306	EP05-11-125FR-306				超静聚氨脂(灰色) Super muting polyurethane (Grey)				

EP6系列-空心钉活动式 EP6 Series-Bolt hole swivel type






规格 Size	编号 Code No. / 空心钉活动 Bolt hole swivel	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	孔径 Hole Dia. (mm)
3"	EP06-11-075PS-301	75	30	60	高级聚氨脂(黑色) High-class polyurethane(Black)	滚珠 Ball bearing	106	76	12
	EP06-11-075PS-305				超静聚氨脂(灰色) Super muting polyurethane(Grey)				
	EP06-11-075PS-501				高强度人造胶(灰色) High-strength artificial rubber(Grey)				
	EP06-11-075PS-507				导电人造胶(灰色) Conductive artificial rubber(Grey)				
4"	EP06-11-100PS-301	100	30	80	高级聚氨脂(黑色) High-class polyurethane(Black)	滚珠 Ball bearing	132	92	12
	EP06-11-100PS-305				超静聚氨脂(灰色) Super muting polyurethane(Grey)				
	EP06-11-100PS-501				高强度人造胶(灰色) High-strength artificial rubber(Grey)				
	EP06-11-100PS-507				导电人造胶(灰色) Conductive artificial rubber(Grey)				
5"	EP06-11-125PS-301	125	30	100	高级聚氨脂(黑色) High-class polyurethane(Black)	滚珠 Ball bearing	157	106	12
	EP06-11-125PS-305				超静聚氨脂(灰色) Super muting polyurethane(Grey)				
	EP06-11-125PS-501				高强度人造胶(灰色) High-strength artificial rubber(Grey)				
	EP06-11-125PS-507				导电人造胶(灰色) Conductive artificial rubber(Grey)				

EP6系列-空心钉固定式 EP6 Series-Bolt hole rigid type






规格 Size	编号 Code No. / 空心钉固定 Bolt hole rigid	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	孔径 Hole Dia. (mm)
3"	EP06-11-075PR-301	75	30	60	高级聚氨脂(黑色) High-class polyurethane(Black)	滚珠 Ball bearing	106	76	12
	EP06-11-075PR-305				超静聚氨脂(灰色) Super muting polyurethane(Grey)				
	EP06-11-075PR-501				高强度人造胶(灰色) High-strength artificial rubber(Grey)				
	EP06-11-075PR-507				导电人造胶(灰色) Conductive artificial rubber(Grey)				
4"	EP06-11-100PR-301	100	30	80	高级聚氨脂(黑色) High-class polyurethane(Black)	滚珠 Ball bearing	132	92	12
	EP06-11-100PR-305				超静聚氨脂(灰色) Super muting polyurethane(Grey)				
	EP06-11-100PR-501				高强度人造胶(灰色) High-strength artificial rubber(Grey)				
	EP06-11-100PR-507				导电人造胶(灰色) Conductive artificial rubber(Grey)				
5"	EP06-11-125PR-301	125	30	100	高级聚氨脂(黑色) High-class polyurethane(Black)	滚珠 Ball bearing	157	106	12
	EP06-11-125PR-305				超静聚氨脂(灰色) Super muting polyurethane(Grey)				
	EP06-11-125PR-501				高强度人造胶(灰色) High-strength artificial rubber(Grey)				
	EP06-11-125PR-507				导电人造胶(灰色) Conductive artificial rubber(Grey)				

EP6系列-方头丝杆式 EP6 Series-Square head threaded stem type






规格 Size	编号 Code No. 方头丝杆 Square head threaded stem	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	丝杆规格 Threaded stem size (mm)
3"	EP06-11-075M-301	75	30	60	高级聚氨脂(黑色) High-class polyurethane(Black)	滚珠 Ball bearing	106	76	12X14
	EP06-11-075M-305				超静聚氨脂(灰色) Super muting polyurethane(Grey)				
	EP06-11-075M-501				高强度人造胶(灰色) High-strength artificial rubber(Grey)				
	EP06-11-075M-507				导电人造胶(灰色) Conductive artificial rubber(Grey)				
4"	EP06-11-100M-301	100	30	80	高级聚氨脂(黑色) High-class polyurethane(Black)	滚珠 Ball bearing	132	92	12X14
	EP06-11-100M-305				超静聚氨脂(灰色) Super muting polyurethane(Grey)				
	EP06-11-100M-501				高强度人造胶(灰色) High-strength artificial rubber(Grey)				
	EP06-11-100M-507				导电人造胶(灰色) Conductive artificial rubber(Grey)				
5"	EP06-11-125M-301	125	30	100	高级聚氨脂(黑色) High-class polyurethane(Black)	滚珠 Ball bearing	157	106	12X14
	EP06-11-125M-305				超静聚氨脂(灰色) Super muting polyurethane(Grey)				
	EP06-11-125M-501				高强度人造胶(灰色) High-strength artificial rubber(Grey)				
	EP06-11-125M-507				导电人造胶(灰色) Conductive artificial rubber(Grey)				

EP6系列-夹板活动/固定式 EP6 Series-Splinting type Swivel/Rigid






规格 Size	编号 Code No. 夹板式活动 Splinting type swivel	夹板式固定 Splinting type rigid	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	夹板规格 Splinting size (mm)
3"	EP06-11-075FS-301	EP06-11-075FR-301	75	30	60	高级聚氨脂(黑色) High-class polyurethane(Black)	滚珠 Ball bearing	112	76	10X35
	EP06-11-075FS-305	EP06-11-075FR-305				超静聚氨脂(灰色) Super muting polyurethane(Grey)				
	EP06-11-075FS-501	EP06-11-075FR-501				高强度人造胶(灰色) High-strength artificial rubber(Grey)				
	EP06-11-075FS-507	EP06-11-075FR-507				导电人造胶(灰色) Conductive artificial rubber(Grey)				
4"	EP06-11-100FS-301	EP06-11-100FR-301	100	30	80	高级聚氨脂(黑色) High-class polyurethane(Black)	滚珠 Ball bearing	138	92	10X35
	EP06-11-100FS-305	EP06-11-100FR-305				超静聚氨脂(灰色) Super muting polyurethane(Grey)				
	EP06-11-100FS-501	EP06-11-100FR-501				高强度人造胶(灰色) High-strength artificial rubber(Grey)				
	EP06-11-100FS-507	EP06-11-100FR-507				导电人造胶(灰色) Conductive artificial rubber(Grey)				
5"	EP06-11-125FS-301	EP06-11-125FR-301	125	30	100	高级聚氨脂(黑色) High-class polyurethane(Black)	滚珠 Ball bearing	163	106	10X35
	EP06-11-125FS-305	EP06-11-125FR-305				超静聚氨脂(灰色) Super muting polyurethane(Grey)				
	EP06-11-125FS-501	EP06-11-125FR-501				高强度人造胶(灰色) High-strength artificial rubber(Grey)				
	EP06-11-125FS-507	EP06-11-125FR-507				导电人造胶(灰色) Conductive artificial rubber(Grey)				

EP9系列-空心钉活动/固定式两刀电梯轮(6301) EP9 Series-Bolt hole type Swivel/Rigid two slices elevator caster(6301)





规格 Size	编号 Code No. 空心钉活动 Bolt hole swivel	空心钉固定 Bolt hole rigid	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	孔径 Hole Dia. (mm)
4"	EP09-11-100PS-315	EP09-11-100PR-315	100	30	50	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	128	95	12
5"	EP09-11-125PS-315	EP09-11-125PR-315	125	30	50	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	150	114	12

EP9系列-方头丝杆两刀电梯轮(6301) EP9 Series-Square head threaded stem type two slices elevator caster(6301)



规格 Size	编号 Code No. 方头丝杆 Square head threaded stem	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	丝杆规格 Threaded stem size (mm)
4"	EP09-11-100M-315	100	30	50	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	128	95	12X14
5"	EP09-11-125M-315	125	30	50	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	150	114	12X14

EP9系列-夹板活动/固定式两刀电梯轮(6301) EP9 Series-Splinting type Swivel/Rigid two slices elevator caster(6301)



规格 Size	编号 Code No. 夹板式活动 Splinting type swivel	夹板式固定 Splinting type rigid	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	夹板规格 Splinting size (mm)
4"	EP09-11-100FS-315	EP09-11-100FR-315	100	30	50	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	136	95	10X35
5"	EP09-11-125FS-315	EP09-11-125FR-315	125	30	50	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	158	114	10X35

EP10系列-空心钉活动/固定式三刀电梯轮(6301) EP10 Series-Bolt hole type Swivel/Rigid three slices elevator caster(6301)





规格 Size	编号 Code No.		轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	孔径 Hole Dia. (mm)
	空心钉活动 Bolt hole Swivel	空心钉固定 Bolt hole Rigid								
4"	EP10-11-100PS-317	EP10-11-100PR-317	100	22	50	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	136	92	12
5"	EP10-11-125PS-317	EP10-11-125PR-317	125	22	70	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	160	106	12

EP10系列-方头丝杆三刀电梯轮(6301) EP10 Series-Square head threaded stem type three slices elevator caster(6301)



规格 Size	编号 Code No. 方头丝杆 Square head threaded stem	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	丝杆规格 Threaded stem size (mm)
4"	EP10-11-100M-317	100	22	50	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	136	92	12X14
5"	EP10-11-125M-317	125	22	70	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	160	106	12X14

EP10系列-夹板活动/固定式三刀电梯轮(6301) EP10 Series-Splinting type Swivel/Rigid three slices elevator caster(6301)



规格 Size	编号 Code No. 夹板式活动 Splinting type swivel	夹板式固定 Splinting type rigid	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	夹板规格 Splinting size (mm)
4"	EP10-11-100FS-317	EP10-11-100FR-317	100	22	50	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	142	92	10X35
5"	EP10-11-125FS-317	EP10-11-125FR-317	125	22	70	聚氨脂(灰色) Polyurethane (Grey)	滚珠 Ball bearing	172	106	10X35

EP12系列-卡位丝杆式(热处理支架) EP12 Series-Detent threaded stem type(heat treatment fork)





规格 Size	编号 Code No. / 卡位丝杆 Detent threaded stem	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	丝杆规格 Threaded stem size (inch)
3"	EP12-11-075M-308	75	28	60	高强度聚氨脂(蓝色) High-strength polyurethane (Blue)	滚珠 Ball bearing	104	75	½"-13X1"
	EP12-11-075M-306				超静聚氨脂(灰色) Super muting polyurethane (Grey)				
4"	EP12-11-100M-308	100	28	80	高强度聚氨脂(蓝色) High-strength polyurethane (Blue)	滚珠 Ball bearing	130	90	½"-13X1"
	EP12-11-100M-306				超静聚氨脂(灰色) Super muting polyurethane (Grey)				
5"	EP12-11-125M-308	125	30	100	高强度聚氨脂(蓝色) High-strength polyurethane (Blue)	滚珠 Ball bearing	155	103	½"-13X1"
	EP12-11-125M-306				超静聚氨脂(灰色) Super muting polyurethane (Grey)				

EP12系列-空心钉活动式(热处理支架) EP12 Series-Bolt hole swivel type (heat treatment fork)





规格 Size	编号 Code No. / 空心钉活动 Bolt hole swivel	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	孔径 Hole Dia. (mm)
3"	EP12-11-075PS-308	75	28	60	高强度聚氨脂(蓝色) High-strength polyurethane (Blue)	滚珠 Ball bearing	104	75	12
	EP12-11-075PS-306				超静聚氨脂(灰色) Super muting polyurethane (Grey)				
4"	EP12-11-100PS-308	100	28	80	高强度聚氨脂(蓝色) High-strength polyurethane (Blue)	滚珠 Ball bearing	130	90	12
	EP12-11-100PS-306				超静聚氨脂(灰色) Super muting polyurethane (Grey)				
5"	EP12-11-125PS-308	125	30	100	高强度聚氨脂(蓝色) High-strength polyurethane (Blue)	滚珠 Ball bearing	155	103	12
	EP12-11-125PS-306				超静聚氨脂(灰色) Super muting polyurethane (Grey)				

EP13系列-卡位丝杆式(热处理支架) EP13 Series-Detent Threaded stem type(heat treatment fork)





规格 Size	编号 Code No. / 卡位丝杆 Detent threaded stem	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	丝杆规格 Threaded stem size (inch)
3"	EP13-11-075M-301	75	30	60	高级聚氨脂(黑色) High-class polyurethane(Black)	滚珠 Ball bearing	104	75	½"-13X1"
	EP13-11-075M-305				超静聚氨脂(灰色) Super muting polyurethane(Grey)				
	EP13-11-075M-501				高强度人造胶(灰色) High-strength artificial rubber(Grey)				
4"	EP13-11-100M-301	100	30	80	高级聚氨脂(黑色) High-class polyurethane(Black)	滚珠 Ball bearing	130	90	½"-13X1"
	EP13-11-100M-305				超静聚氨脂(灰色) Super muting polyurethane(Grey)				
	EP13-11-100M-501				高强度人造胶(灰色) High-strength artificial rubber(Grey)				
5"	EP13-11-125M-301	125	30	100	高级聚氨脂(黑色) High-class polyurethane(Black)	滚珠 Ball bearing	155	103	½"-13X1"
	EP13-11-125M-305				超静聚氨脂(灰色) Super muting polyurethane(Grey)				
	EP13-11-125M-501				高强度人造胶(灰色) High-strength artificial rubber(Grey)				

EP13系列-空心钉活动式（热处理支架） EP13 Series-Bolt hole swivel type(heat treatment fork)





规格 Size	编号 Code No. / 空心钉活动 Bolt hole swivel	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	轴承 Bearing	安装高度 Setting height (mm)	转动半径 Swivel radius (mm)	孔径 Hole Dia. (mm)
3"	EP13-11-075PS-301	75	30	60	高级聚氨脂(黑色) High-class polyurethane(Black)	滚珠 Ball bearing	104	75	12
	EP13-11-075PS-305				超静聚氨脂(灰色) Super muting polyurethane(Grey)				
	EP13-11-075PS-501				高强度人造胶(灰色) High-strength artificial rubber(Grey)				
4"	EP13-11-100PS-301	100	30	80	高级聚氨脂(黑色) High-class polyurethane(Black)	滚珠 Ball bearing	130	90	12
	EP13-11-100PS-305				超静聚氨脂(灰色) Super muting polyurethane(Grey)				
	EP13-11-100PS-501				高强度人造胶(灰色) High-strength artificial rubber(Grey)				
5"	EP13-11-125PS-301	125	30	100	高级聚氨脂(黑色) High-class polyurethane(Black)	滚珠 Ball bearing	155	103	12
	EP13-11-125PS-305				超静聚氨脂(灰色) Super muting polyurethane(Grey)				
	EP13-11-125PS-501				高强度人造胶(灰色) High-strength artificial rubber(Grey)				

ES1-3系列脚轮 ES1-3 series caster

環球脚輪
GLOBE CASTER

轮径 100-400mm Wheel diameter 100-400mm

承载 300-12000kg Load capacity 300-12000kg









ES1系列-高强度尼龙单轮,超级聚氨脂单轮,铁芯聚氨脂单轮,铸铁单轮

ES1 Series-High-strength nylon,Super polyurethane,Iron core polyurethane,Cast iron wheels



超级聚氨脂轮(红色)
Super PU wheel(Red)



铁芯聚氨脂轮(红色)
Iron core PU wheel(Red)



高强度尼龙轮(白色)
High-strength nylon wheel(White)



铸铁轮
Cast iron wheel

规格 Size	编号 Code No.	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	单轮重量 Wheel weight (kg)	轴承 Bearing	轴承型号 Bearing type	轴承直径 Bearing outside dia. (mm)	轴承孔径 Bearing bore dia. (mm)
4"	ES01-1-100K-304	100	50	350	超级聚氨脂(红色) Super polyurethane(Red)	0.44	滚珠 Ball bearing	6203	40	17
	ES01-1-100K-402			350	铁芯聚氨脂(红色) Iron core polyurethane(Red)	1.47				
	ES01-1-100K-103			400	高强度尼龙(白色) High-strength nylon(White)	0.40				
	ES01-1-100K-701			400	铸铁 Cast iron	1.43				
5"	ES01-1-125K-304	125	50	400	超级聚氨脂(红色) Super polyurethane(Red)	0.63	滚珠 Ball bearing	6203	40	17
	ES01-1-125K-402			400	铁芯聚氨脂(红色) Iron core polyurethane(Red)	1.72				
	ES01-1-125K-103			600	高强度尼龙(白色) High-strength nylon(White)	0.63				
	ES01-1-125K-701			600	铸铁 Cast iron	1.95				
6"	ES01-1-150K-304	150	50	500	超级聚氨脂(红色) Super polyurethane(Red)	0.90	滚珠 Ball bearing	6204	47	20
	ES01-1-150K-304A			500		0.93		6205	52	25
	ES01-1-150K-402			500	铁芯聚氨脂(红色) Iron core polyurethane(Red)	2.55		6204	47	20
	ES01-1-150K-402A			500		2.58		6205	52	25
	ES01-1-150K-103			800	高强度尼龙(白色) High-strength nylon(White)	0.79		6204	47	20
	ES01-1-150K-103A			800		0.81		6205	52	25
	ES01-1-150K-701			800	铸铁 Cast iron	2.95		6204	47	20
	ES01-1-150K-701A			800		3.00		6205	52	25
8"	ES01-1-200K-304	200	50	650	超级聚氨脂(红色) Super polyurethane(Red)	1.34	滚珠 Ball bearing	6204	47	20
	ES01-1-200K-304A			650		1.37		6205	52	25
	ES01-1-200K-402			650	铁芯聚氨脂(红色) Iron core polyurethane(Red)	3.20		6204	47	20
	ES01-1-200K-402A			650		3.55		6205	52	25
	ES01-1-200K-103			1000	高强度尼龙(白色) High-strength nylon(White)	1.10		6204	47	20
	ES01-1-200K-103A			1000		1.14		6205	52	25
	ES01-1-200K-701			1000	铸铁 Cast iron	4.06		6204	47	20
	ES01-1-200K-701A			1000		4.10		6205	52	25
10"	ES01-1-250K-304	250	64	1200	超级聚氨脂(红色) Super polyurethane(Red)	2.62	滚珠 Ball bearing	6205	52	25
	ES01-1-250K-402			1200	铁芯聚氨脂(红色) Iron core polyurethane(Red)	8.09				
	ES01-1-250K-103			1500	高强度尼龙(白色) High-strength nylon(White)	2.14				
	ES01-1-250K-701			1500	铸铁 Cast iron	8.74				
12"	ES01-1-300K-304	300	64	1500	超级聚氨脂(红色) Super polyurethane(Red)	3.38	滚珠 Ball bearing	6205	52	25
	ES01-1-300K-304A			1500		3.49		6206	62	30
	ES01-1-300K-402			1500	铁芯聚氨脂(红色) Iron core polyurethane(Red)	10.59		6205	52	25
	ES01-1-300K-402A			1500		10.93		6206	62	30
	ES01-1-300K-103			2000	高强度尼龙(白色) High-strength nylon(White)	2.84		6205	52	25
	ES01-1-300K-103A			2000		2.93		6206	62	30
	ES01-1-300K-701			2000	铸铁 Cast iron	10.62		6205	52	25
	ES01-1-300K-701A			2000		10.76		6206	62	30

ES2系列-实心尼龙轮(黄色)
ES2 Series-Solid nylon wheel(Yellow)



实心尼龙轮(黄色)
Solid nylon wheel(Yellow)

规格 Size	编号 Code No.	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	单轮重量 Wheel weight (kg)	轴承 Bearing	轴承型号 Bearing type	轴承直径 Bearing outside dia. (mm)	轴承孔径 Bearing bore dia. (mm)
4"	ES02-4-100K-210	100	50	300	实心尼龙(黄色) Solid nylon(Yellow)		光身 Nude			
5"	ES02-4-125K-210	125	50	400	实心尼龙(黄色) Solid nylon(Yellow)		光身 Nude			
6"	ES02-4-150K-210	150	50	600	实心尼龙(黄色) Solid nylon(Yellow)	0.52	光身 Nude			20
8"	ES02-4-200K-210	200	50	800	实心尼龙(黄色) Solid nylon(Yellow)	0.87	光身 Nude			20
10"	ES02-4-250K-210	250	64	1000	实心尼龙(黄色) Solid nylon(Yellow)	1.15	光身 Nude			25
12"	ES02-4-300K-210	300	64	1200	实心尼龙(黄色) Solid nylon(Yellow)	1.50	光身 Nude			30

ES2系列-双轴承尼龙轮(黄色)
ES2 Series- Double ball bearing nylon wheel(Yellow)



双轴承尼龙轮(黄色)
Double ball bearing nylon wheel(Yellow)

规格 Size	编号 Code No.	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	单轮重量 Wheel weight (kg)	轴承 Bearing	轴承型号 Bearing type	轴承直径 Bearing outside dia. (mm)	轴承孔径 Bearing bore dia. (mm)
4"	ES02-1-100K-210	100	50	300	尼龙(黄色) Nylon(Yellow)		滚珠 Ball bearing	6203	40	17
5"	ES02-1-125K-210	125	50	400	尼龙(黄色) Nylon(Yellow)		滚珠 Ball bearing	6203	40	17
6"	ES02-1-150K-210	150	50	600	尼龙(黄色) Nylon(Yellow)	0.68	滚珠 Ball bearing	6204	47	20
	ES02-1-150K-210A			600		0.70		6205	52	25
8"	ES02-1-200K-210	200	50	800	尼龙(黄色) Nylon(Yellow)	0.94	滚珠 Ball bearing	6204	47	20
	ES02-1-200K-210A			800		0.98		6205	52	25
10"	ES02-1-250K-210	250	50	1000	尼龙(黄色) Nylon(Yellow)	1.36	滚珠 Ball bearing	6205	52	25
12"	ES02-1-300K-210	300	50	1200	尼龙(黄色) Nylon(Yellow)	1.71	滚珠 Ball bearing	6205	52	25
	ES02-1-300K-210A			1200		1.81		6206	62	30

ET1-8系列脚轮 ET1-8 series caster

環球脚輪
GLOBE CASTER

轮径 80-200mm Wheel diameter 80-200mm

承载 350-600kg Load capacity 350-600kg





ET1系列-高强度尼龙叉车轮(白色)(平边) ET1 Series- High strength nylon forklift wheel(White)(Flat)



高强度尼龙叉车轮(白色)
High strength nylon forklift wheel(White)



高强度尼龙叉车轮(白色)
High strength nylon forklift wheel(White)

规格 Size	编号 Code No.	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	单轮重量 Wheel weight (kg)	轴承 Bearing	轴承型号 Bearing type	轴承直径 Bearing outside dia. (mm)	轴承孔径 Bearing bore dia. (mm)
8050	ET01-1-8050K-104	80	50	350	高强度尼龙(白色) High strength nylon(White)	1.18	滚珠 Ball bearing	6204	47	20
8060	ET01-1-8060K-104	80	60	380	高强度尼龙(白色) High strength nylon(White)	0.21	滚珠 Ball bearing	6204	47	20
8070	ET01-1-8070K-104	80	70	400	高强度尼龙(白色) High strength nylon(White)	0.26	滚珠 Ball bearing	6204	47	20
8080	ET01-1-8080K-104	80	80	450	高强度尼龙(白色) High strength nylon(White)	0.29	滚珠 Ball bearing	6204	47	20
8090	ET01-1-8090K-104	80	90	500	高强度尼龙(白色) High strength nylon(White)	0.33	滚珠 Ball bearing	6204	47	20
80100	ET01-1-80100K-104	80	100	550	高强度尼龙(白色) High strength nylon(White)	0.36	滚珠 Ball bearing	6204	47	20
1850	ET01-1-1850K-104	180	50	600	高强度尼龙(白色) High strength nylon(White)	0.54	滚珠 Ball bearing	6204	47	20
2050	ET01-1-2050K-104	200	50	600	高强度尼龙(白色) High strength nylon(White)	0.59	滚珠 Ball bearing	6204	47	20

ET1系列-高级尼龙叉车轮(黑色)(平边) ETl Series-High-class nylon forklift Whee{Black)(Flat)




高级尼龙叉车轮(黑色)
High-class nylon forklift Wheel(Black)



高级尼龙叉车轮(黑色)
High-class nylon forklift Wheel(Black)

规格 Size	编号 Code No.	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	单轮重量 Wheel weight (kg)	轴承 Bearing	轴承型号 Bearing type	轴承直径 Bearing outside dia. (mm)	轴承孔径 Bearing bore dia. (mm)
8050	ET01-1-8050K-102	80	50	350	高级尼龙叉车轮(黑色) High-class nylon(Black)	0.18	滚珠 Ball bearing	6204	47	20
8060	ET01-1-8060K-102	80	60	380	高级尼龙叉车轮(黑色) High-class nylon(Black)	0.22	滚珠 Ball bearing	6204	47	20
8070	ET01-1-8070K-102	80	70	400	高级尼龙叉车轮(黑色) High-class nylon(Black)	0.26	滚珠 Ball bearing	6204	47	20
8080	ET01-1-8080K-102	80	80	450	高级尼龙叉车轮(黑色) High-class nylon(Black)	0.31	滚珠 Ball bearing	6204	47	20
8090	ET01-1-8090K-102	80	90	500	高级尼龙叉车轮(黑色) High-class nylon(Black)	0.33	滚珠 Ball bearing	6204	47	20
80100	ET01-1-80100K-102	80	100	550	高级尼龙叉车轮(黑色) High-class nylon(Black)	0.38	滚珠 Ball bearing	6204	47	20
1850	ET01-1-1850K-102	180	50	600	高级尼龙叉车轮(黑色) High-class nylon(Black)	0.57	滚珠 Ball bearing	6204	47	20
2050	ET01-1-2050K-102	200	50	600	高级尼龙叉车轮(黑色) High-class nylon(Black)	0.62	滚珠 Ball bearing	6204	47	20

ET4系列-铁芯聚氨脂叉车轮(红色)(平边)(不配轴承) ET4 Series- Iron core polyurethane forklift wheel(Red)(Flat)(Without bearing)




铁芯聚氨脂叉车轮(红色)
Iron core PU forklift wheel(Red)



铁芯聚氨脂叉车轮(红色)
Iron core PU forklift wheel(Red)

规格 Size	编号 Code No.	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	单轮重量 Wheel weight (kg)	轴承 Bearing	轴承型号 Bearing type	轴承直径 Bearing outside dia. (mm)	轴承孔径 Bearing bore dia. (mm)
8050	ET04-1-8050K-402	80	50	350	铁芯聚氨脂(红色) Iron core polyurethane(Red)	0.60	滚珠 Ball bearing	6204	47	20
8060	ET04-1-8060K-402	80	60	380	铁芯聚氨脂(红色) Iron core polyurethane(Red)	0.69	滚珠 Ball bearing	6204	47	20
8070	ET04-1-8070K-402	80	70	400	铁芯聚氨脂(红色) Iron core polyurethane(Red)	0.82	滚珠 Ball bearing	6204	47	20
8080	ET04-1-8080K-402	80	80	450	铁芯聚氨脂(红色) Iron core polyurethane(Red)	0.92	滚珠 Ball bearing	6204	47	20
8090	ET04-1-8090K-402	80	90	500	铁芯聚氨脂(红色) Iron core polyurethane(Red)	1.03	滚珠 Ball bearing	6204	47	20
80100	ET04-1-80100K-402	80	100	550	铁芯聚氨脂(红色) Iron core polyurethane(Red)	1.15	滚珠 Ball bearing	6204	47	20
1850	ET04-1-1850K-402	180	50	600	铁芯聚氨脂(红色) Iron core polyurethane(Red)	2.58	滚珠 Ball bearing	6204	47	20
2050	ET04-1-2050K-402	200	50	600	铁芯聚氨脂(红色) Iron core polyurethane(Red)	3.00	滚珠 Ball bearing	6204	47	20

ET4系列-铁芯聚氨脂叉车轮(黄色)(平边)(不配轴承) ET4 Series- Iron core polyurethane forklift wheel(Yellow)(Flat)(Without bearing)



铁芯聚氨脂叉车轮(黄色)
Iron core PU forklift wheel(Yellow)



铁芯聚氨脂叉车轮(黄色)
Iron core PU forklift wheel(Yellow)

规格 Size	编号 Code No.	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	单轮重量 Wheel weight (kg)	轴承 Bearing	轴承型号 Bearing type	轴承直径 Bearing outside dia. (mm)	轴承孔径 Bearing bore dia. (mm)
8050	ET04-1-8050K-404	80	50	350	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)	0.60	滚珠 Ball bearing	6204	47	20
8060	ET04-1-8060K-404	80	60	380	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)	0.69	滚珠 Ball bearing	6204	47	20
8070	ET04-1-8070K-404	80	70	400	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)	0.82	滚珠 Ball bearing	6204	47	20
8080	ET04-1-8080K-404	80	80	450	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)	0.92	滚珠 Ball bearing	6204	47	20
8090	ET04-1-8090K-404	80	90	500	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)	1.03	滚珠 Ball bearing	6204	47	20
80100	ET04-1-80100K-404	80	100	550	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)	1.15	滚珠 Ball bearing	6204	47	20
1850	ET04-1-1850K-404	180	50	600	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)	2.58	滚珠 Ball bearing	6204	47	20
2050	ET04-1-2050K-404	200	50	600	铁芯聚氨脂(黄色) Iron core polyurethane(Yellow)	3.00	滚珠 Ball bearing	6204	47	20




铁芯聚氨脂叉车轮(红色)
Iron core PU forklift wheel(Red)



铁芯聚氨脂叉车轮(红色)
Iron core PU forklift wheel(Red)

规格 Size	编号 Code No.	轮径 Wheel Dia. (mm)	轮宽 Wheel width (mm)	承载 Load capacity (kg)	单轮材料 Material of wheel	单轮重量 Wheel weight (kg)	轴承 Bearing	轴承型号 Bearing type	轴承直径 Bearing outside dia (mm)	轴承孔径 Bearing bore dia (mm)
8070	ET08-1-8070K-402	80	70	400	铁芯聚氨脂(红色) Iron core polyurethane(Red)	0.86	滚珠 Ball bearing	6204	47	20
1850	ET08-1-180K-402	180	50	600	铁芯聚氨脂(红色) Iron core polyurethane(Red)	2.03	滚珠 Ball bearing	6204	47	20
2050	ET08-1-200K-402	200	50	600	铁芯聚氨脂(红色) Iron core polyurethane(Red)	2.51	滚珠 Ball bearing	6204	47	20



環球脚輪

GLOBE CASTER

中國廣東省佛山市環球脚輪有限公司

地址：中國廣東省佛山市南海區科技工業園A區興業東路2號　　郵編：528225

電話：0757-86692833　86692299　86695382　　傳真：0757-86690681

網址：Http://www.globe-castor.com　　電子郵箱：master@globe-castor.com

Foshan Globe Caster Co., Ltd,Guangdong,China

Address: NO.2 East Xingye Road,Area A,Shishan Science & Technology Industrial Zone, Nanhai District,Foshan City,Guangdong,China　　Post Code: 528225

Tel: 0757-86692833　86692299　86695382　　Fax: 0757-86690681

Web site: Http://www.globe-castor.com　　Email: master@globe-castor.com